




INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

# Beam Pendant Direct Series

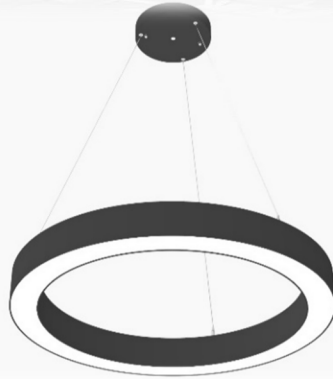

**This 24" round linear pendant brings another style to our linear architectural family. This fixture is ideal for small seating areas and tables in commercial buildings, schools/libraries, reception areas and conference rooms. There are 4 color temperature options, field selectable. It is available in white or black finishes and can be pendant mounted.**

## Specifications

CRI	>82	Ratings & Certifications	cULus, Damp Location
Light Source	Integrated LED	Beam Angle	Wide
Voltage	120-277V	Dimmable	0-10v
Color Temperature	3000K - 3500K - 4000K - 5000K	Mounting Options	Suspended
Wattage	20W/30W/40W	Operating Temperature	-30° C to 40° C (-22° F to 104° F)
LPW	80-100	Lumens	3200 - 4000
Housing	Extruded Aluminum	Finish	Black or White
Product Weight	9.92 lbs	Product Dimensions	23.62" Diameter x 3.15" Height
Shipping Weight	11.02 lbs	Shipping Dimensions	24.4" L x 24.8" W x 3.93" H
Lifespan	50,000+	Warranty	5 Years

\*Data is considered to be representative of the series. Actual production may vary between up to ±10% of initial delivered lumens.





INDUSTRIAL AND COMMERCIAL  
LIGHTING MFR SINCE 2003

PROJECT NAME \_\_\_\_\_  
ITEM # \_\_\_\_\_  
FIXTURE SCHEDULE \_\_\_\_\_  
NOTES \_\_\_\_\_

## Order Information

Architectural Pendant Round			Example: BEAMPEND-24-4C40WS-BK-G2		
Series	Diameter	CCT	Wattage	Finish	Generation
BEAMPEND	<b>24</b> 24" Round	<b>4CT</b> 3000K/3500K/4000K/5000K	<b>40W</b> Select 20W/30W/40W	<b>BK</b> Black  <b>WH</b> White	G2

## Dimensions

Item	Diameter	Height	Weight
BEAMPEND-24-4CT-40W-BK-G2	23.62"	3.15"	9.92 lbs.
BEAMPEND-24-4CT-40W-WH-G2	23.62"	3.15"	9.92 lbs.

