CMC SERIES COMMERCIAL INDOOR LIGHTING





Cylinder, White Aluminum Housing, Clear Glass Lens

Features

- Aluminum Base and Polycarbonate (PC) Lens
- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer TRIAC logo

Technical Specifications

Electrical:

- Voltage: 120V, 60Hz
- Power Factor: >0.90
- THD: <20%
- Wattage: 20W
- Efficacy: 83 LPW

Mechanical:

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP40 Suitable For Damp Locations
- 5-Year Warranty

Lighting:

5-Year Warranty

The Back Of The Fixture

Multi CCT: Selectable Multi-CCT Switches Located The Back Of The Fixture

Multi CCT: Selectable Multi-CCT Switches Located

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 1650LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 40°
- Rated Life: 50.000 hrs

Applications:

2" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

Other Models:

- 6W | 450LM | CMC2-MCT-DT-WH 6W | 450LM | CMC2-MCT-DT-BK
 - .
- 9W | 675LM | CMC3-MCTP-DD-WH 15W | 1125LM | CMC4-MCTP-DD-WH 75W | 2625LM | CMC6-MCTP-DD-WH 9W | 675LM | CMC3-MCTP-DD-BK • 15W | 1125LM | CMC4-MCTP-DD-BK 75W | 2625LM | CMC6-MCTP-DD-BK








WESTGATE




ACCESSORIES:

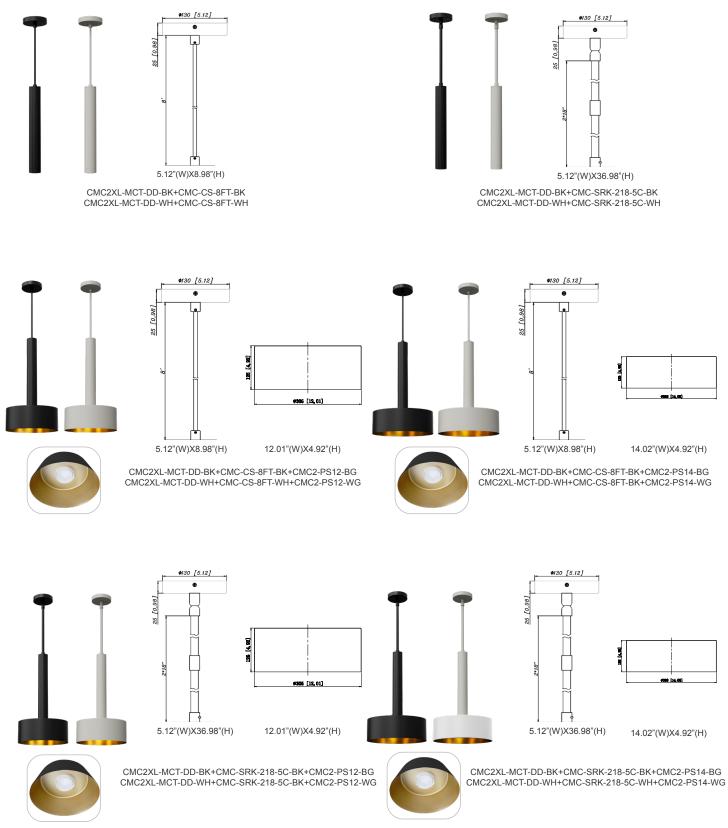

WESTGATE








CMC2XL-MCT-DD-BK+CMC-SRK-218-5C-BK+CMC2-HCDK-AG CMC2XL-MCT-DD-WH+CMC-SRK-218-5C-WH+CMC2-HCDK-BK



5.12"(W)X8.98"(H)

CMC2XL-MCT-DD-BK+CMC-CS-8FT-BK+CMC2-TRM-AG CMC2XL-MCT-DD-WH+CMC-CS-8FT-WH+CMC2-TRM-BN





CMC2XL-MCT-DD-BK+ CMC-CS-8FT-BK+CMC2-TRMWM-AG CMC2XL-MCT-DD-WH+CMC-CS-8FT-WH+CMC2-TRMWM-BN






"(H) 2.65"(W)X9.65"(H)X7.14"(D)



CMC2XL-MCT-DD-BK+CMC-SRK-218-5C-BK+CMC2-DCR-BG CMC2XL-MCT-DD-WH+CMC-SRK-218-5C-WH+CMC2-DCR-WG







3.94"(W)X3.15"(H)



CMC2XL-MCT-DD-BK+CMC-SRK-218-5C-BK+CMC2-DS-BG CMC2XL-MCT-DD-WH+CMC-SRK-218-5C-WH+CMC2-DS-WG



