# CMC SERIES COMMERCIAL INDOOR LIGHTING



41/2"

Ø

4

11/2'

Type:

0.6"

18"(H) X 4 1/2"(W) X 1 3/5"(D)

18"

#### CMCS1XL-MCT-DT-BK CMCS1XL-MCT-DT-WH

1" ARCHITECTURAL CEILING CYLINDERS

Multi Color Temperature (Selectable)



1" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

## eatures

- Multi CCT: Selectable Multi-CCT Switches On The Back Of The Fixture(Dual Function)
- Triac Dimmable at 120V & 0-10V Dimming at 120-277V

## **Technical Specifications**

## **Electrical:**

- Wattage: 9W
- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Efficacy: 70 LPW

#### **Mechanical:**

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP40 Suitable For Damp Locations
- 5-Year Warranty

## Other Models:

- 6W | 450LM | CMCS2L-MCT-DT-WH
- 6W | 450LM | CMCS2L-MCT-DT-BK

## Lighting:

Multi CCT: Selectable Multi-CCT Switches On The Back Of The Fixture(Dual Function)

Aluminum Base and Polycarbonate (PC) Lens

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 630LM

5-Year Warranty

Customer Name:

Project Name:

Note:

-

3/5"

- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 25°
- Rated life: 50,000 hrs


#### **Applications:**

1" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens



## 




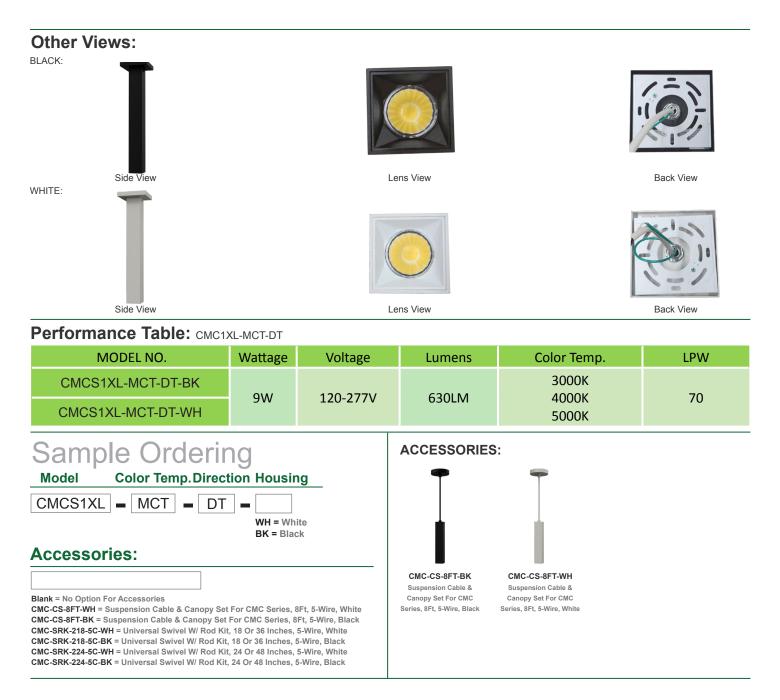

#### ACCESSORIES:



CMCS1XL-MCT-BK+CMC-CS-8FT-BK CMCS1XL-MCT-WH+CMC-CS-8FT-WH



¢130 [5.12] æ

CMCS1XL-MCT-BK+CMC-SRK-218-5C-BK CMCS1XL-MCT-WH+CMC-SRK-218-5C-WH

# **WESTGATE**

