CMC SERIES COMMERCIAL INDOOR LIGHTING



4 1/2"

Ø

4

1/2


Type:

18"

18"(H) X 4 1/2"(W) X 2"(D)

CMCS2XL-MCT-DT-BK CMCS2XL-MCT-DT-WH

2" ARCHITECTURAL CEILING CYLINDERS Multi Color Temperature (Selectable)



2" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens

eatures

- Multi CCT: Selectable Multi-CCT Switches On The Back Of The Fixture(Dual Function)
- Triac Dimmable at 120V & 0-10V Dimming at 120-277V

Technical Specifications

Electrical:

- Wattage: 20W
- Voltage: 120-277V
- Power Factor: >0.90
- THD: <20%
- Efficacy: 70 LPW

Mechanical:

- Aluminum Housing & Glass Lens
- Suspension Cable & Canopy Set Accessories Avail.
- Universal Swivel W/ Rod Kit Accessories Avail. Ambient Operating Temperature: -13°F to 113°F
- IP Rating: IP40 Suitable For Damp Locations
- 5-Year Warranty

Other Models:

- 9W | 630LM | CMCS1XL-MCT-DT-WH
- 9W | 630LM | CMCS1XL-MCT-DT-BK

Lighting:

Multi CCT: Selectable Multi-CCT Switches On The Back Of The Fixture(Dual Function)

Aluminum Base and Polycarbonate (PC) Lens

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 1500LM

5-Year Warranty

Customer Name:

Project Name:

Note:

Ŋ

- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 25°
- Rated life: 50,000 hrs


Applications:

2" Cylinder, Pendant & Ceiling Cylinder Light, Aluminum Cylinder, White Aluminum Housing, Clear Glass Lens







VG-101220

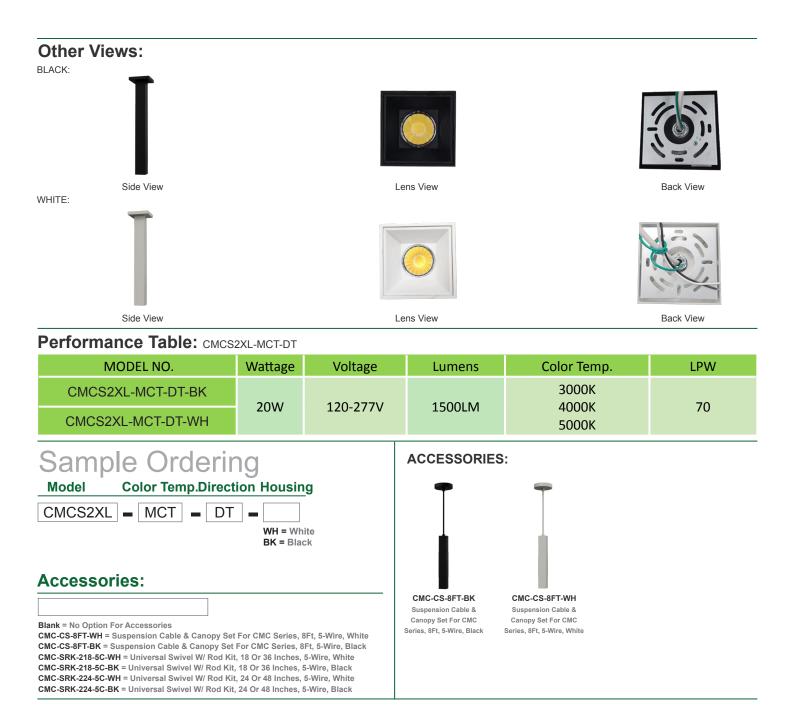

ACCESSORIES:



CMCS2XL-MCT-BK+CMC-CS-8FT-BK CMCS2XL-MCT-WH+CMC-CS-8FT-WH



CMCS2XL-MCT-BK+CMC-SRK-218-5C-BK CMCS2XL-MCT-WH+CMC-SRK-218-5C-WH

WESTGATE

