




CRE-HL20-10-30K-BR
 CRE-HL20-10-40K-BR
 CRE-HL20-10-50K-BR

CRE-HL20-10-30K-SIL
 CRE-HL20-10-40K-SIL
 CRE-HL20-10-50K-SIL

DIMENSIONS:

20"(L) x 5.4"(W) x 3.7"(D)

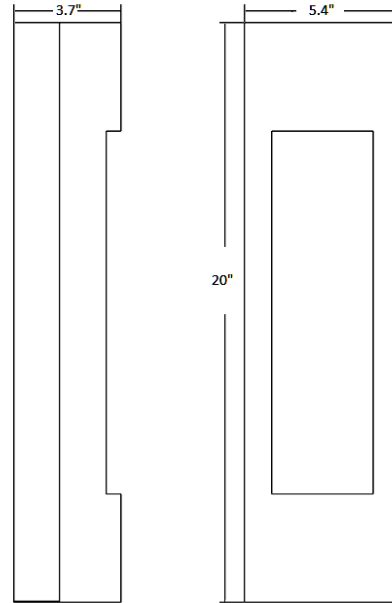

CREST BY WESTGATE LED WALL SCONCES

Ideal for general site lighting, residential houses, doorway.

ELECTRICAL SPECIFICATIONS:

- Voltage: 100~277ACV
- Wattage: 20W(5W X 4)
- Power Factor: 0.95
- Efficacy: 90LM/W

HOUSING SPECIFICATIONS:

- Patent-Pending design with separate light engine (base) and interchangeable designer trims expand the series to multiple color temperatures and models.
- Series can be stocked as separate engines and trims to offer a versatile collection at the store level
- Die-cast Aluminum weatherproof housing, steel backplate, Aluminum Trim (Dark Bronze or Silver)
- Operating temperature: -40°F to 107°F
- Lifespan: 50,000 hr.
- IP Rating: IP65, Suitable for wet locations

CERTIFICATIONS:



| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|---------------------|-------------|------------|--------|------------|
| CRE-HL20-10-30K-BR | 20W(5W X 4) | 100~277ACV | 1800LM | 3000K |
| CRE-HL20-10-40K-BR | 20W(5W X 4) | 100~277ACV | 1800LM | 4000K |
| CRE-HL20-10-50K-BR | 20W(5W X 4) | 100~277ACV | 1800LM | 5000k |
| CRE-HL20-10-30K-SIL | 20W(5W X 4) | 100~277ACV | 1800LM | 3000K |
| CRE-HL20-10-40K-SIL | 20W(5W X 4) | 100~277ACV | 1800LM | 4000K |
| CRE-HL20-10-50K-SIL | 20W(5W X 4) | 100~277ACV | 1800LM | 5000k |

LIGHTING SPECIFICATIONS:

- LED: Lumileds LEDs
- Total lumens: 1800LM
- Color temperature: 3000K/4000k/5000k
- Color rendering index: >70


WARRANTY: 7 years



CREST BY WESTGATE LED WALL SCONCES

OPTIONAL TRIMS:

ALL MODELS PROVIDE UP/DOWN LIGHT

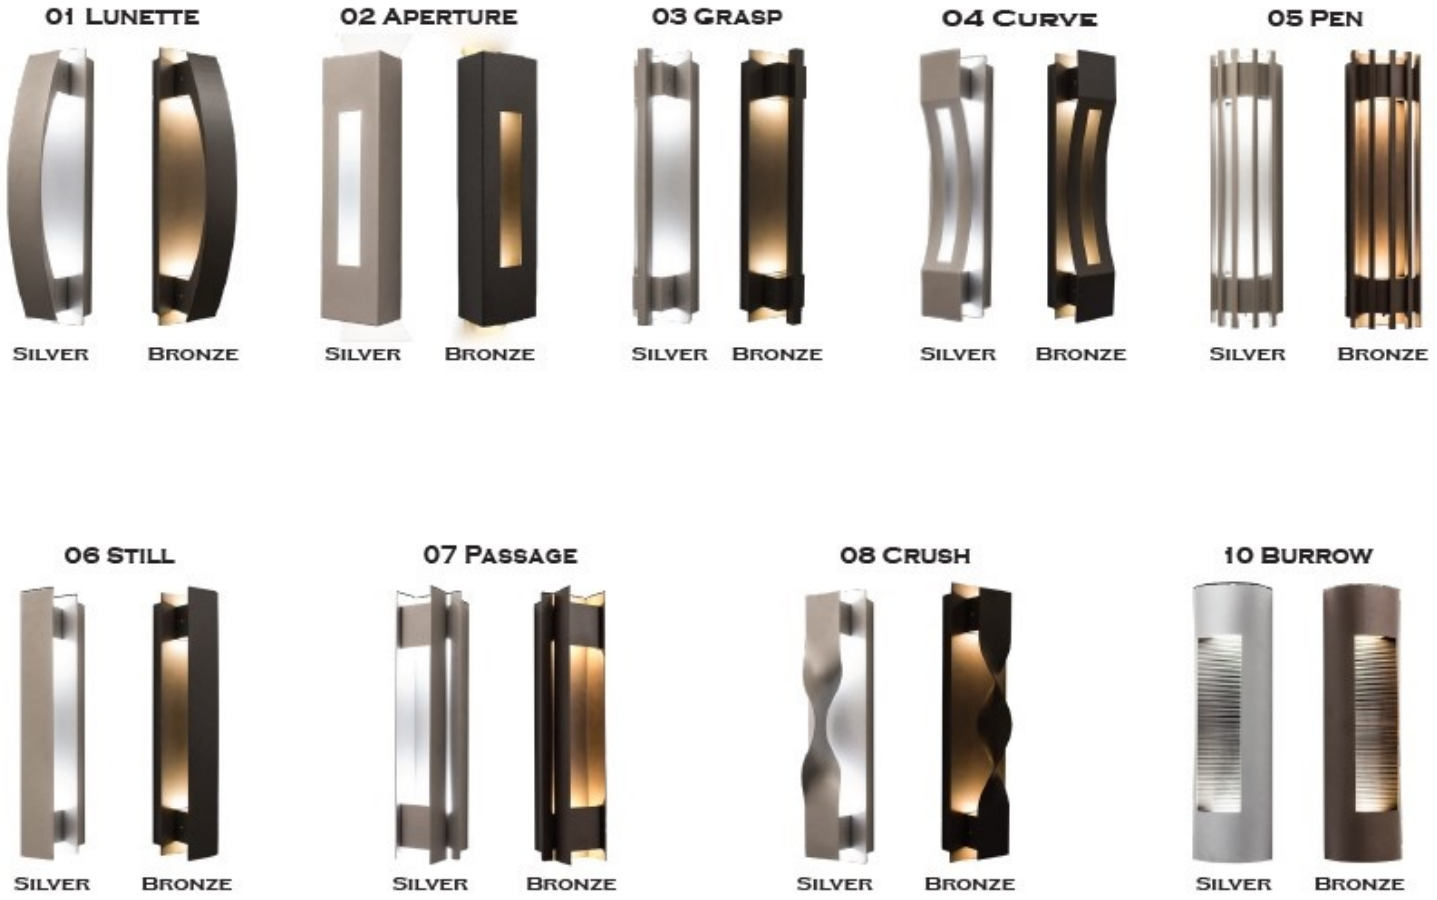

| CATALOG NO. | WATTAGE (LM) | TRIM | | COLOR TEMPERATURE | | FINISH | |
|-----------------|--------------|------|-------------|-------------------|-------------|--------|-------------|
| | | CODE | DESCRIPTION | CODE | DESCRIPTION | CODE | DESCRIPTION |
| CRE | 10W (900LM) | 01 | Lunette | 30K | 3000K | BR | Bronze |
| CRE-HL20 | 20W (1800LM) | 02 | Aperture | 40K | 4000K | SIL | Silver |
| | | 03 | Grasp | 50K | 5000K | | |
| | | 04 | Curve | | | | |
| | | 05 | Pen | | | | |
| | | 06 | Still | | | | |
| | | 07 | Passage | | | | |
| | | 08 | Crush | | | | |
| | | 10 | Burrow | | | | |

Sample Ordering: **CRE-03-30K-BR**
 Cat. No. | Trim | Color Temp. | Finish

Light Engines and Trims
 Can be purchased & stocked separately to readily offer all combinations of color temperatures, outputs, finishes, & trims



Rev. 2019-04-24

