


CRLC SERIES COMMERCIAL INDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC4-15W-MCT-A-D
CRLC4-15W-MCT-A-D-WH
4" LED COMMERCIAL RECESSED LIGHT

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

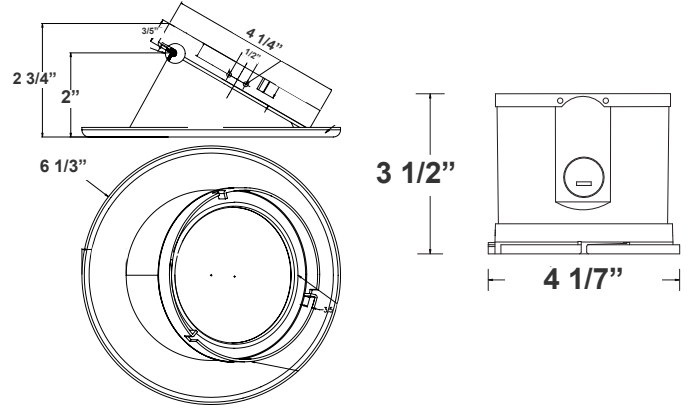

2 3/4" (H) X 4 1/4" (W) X 6 1/3" (D)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Features

- 4" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 85 LPW

Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1275LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

- Direct Fit 4 T8 LED tubes do not burn out easily and provide bright and even lighting to schools, office spaces, retail stores and storage rooms.

Other Models:




- 20W | 1720LM | CRLC4-20W-MCT-A-D
- 20W | 1720LM | CRLC4-20W-MCT-A-D-WH



Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: CRLC4-15W-MCT-A-D

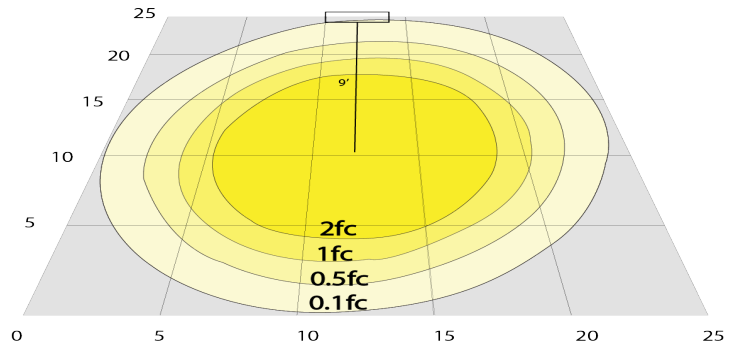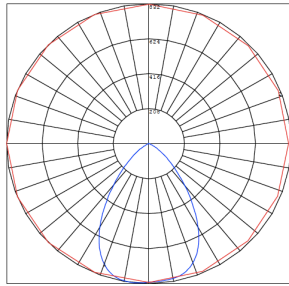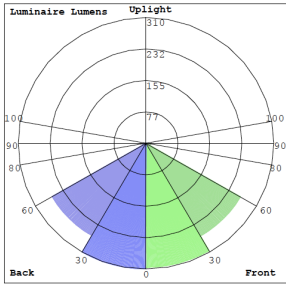

BUG Rating: B1-U1-G0


15W 5000K, Area 25" x 25" Mounting Height: 9'

Other Views:

Hazel



CRLC-EGN-15W-MCT-D



CRLC-TRM-4A



CRLC4-15W-MCT-A-D

White



CRLC-EGN-15W-MCT-D



CRLC-TRM-4A-WH



CRLC4-15W-MCT-A-D-WH

Performance Table: CRLC4-15W-MCT-A-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-15W-MCT-A-D	15W	120-277V	1275LM	3000K	B1-U1-G0	85
CRLC4-15W-MCT-A-D-WH				4000K		
				5000K		

Sample Ordering

Model **Watt** **Color Temp.** **Dimming** **Housing**

CRLC4 - 15W - MCT - A - D -

Blank
WH = WHITE

Accessory:

Blank = No Option For Accessories

RSL4-RI = 4" ROUND ROUGH-IN PLATE, 26" LONG

RSL4-RI-13 = 4" ROUND ROUGH-IN PLATE, 13" LONG

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Example:


1. CRLC4-15W-MCT-A-D (FOR 15W CRLC4 MCT 120-277V)

1. CRLC4-15W-MCT-A-D (FOR 15W CRLC4 MCT 120-277V)
OPT-EM-HB1EXT (EXTERNAL EMERGENCY BACK UP BATTERY)

Accessory:




RSL4-RI
4" ROUND ROUGH-IN
PLATE, 26" LONG

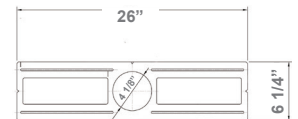

RSL4-RI
26"(W) x 6 1/4"(H)



RSL4-RI-13
4" ROUND ROUGH-IN
PLATE, 13" LONG



RSL4-RI-13
13 1/4"(W) x 6 1/2"(H)

Factory-Installed Option:



OPT-EM-HB1EXT
EXTERNAL EMERGENCY
BACK UP BATTERY

