

# CRLC SERIES COMMERCIAL INDOOR LIGHTING


**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CRLC4-20W-MCT-SA-D  
CRLC4-20W-MCT-SA-D-WH  
4" LED COMMERCIAL SQUARE & OPEN RECESSED LIGHT

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

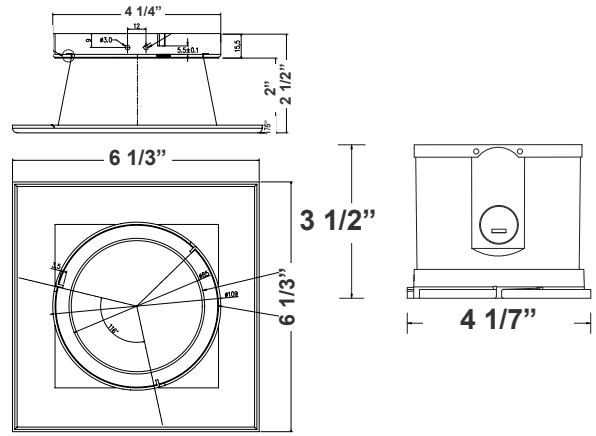

4"(H) X 6 1/3" (W)

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

## Features

- 4" Haze & White Finish TRIM
- MCT: The Switch Is On The Light Engine
- Mounting Options: Recessed
- 5-Year Warranty
- Lifespan: 50,000 hrs.

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W
- Power factor: >0.90
- Efficacy: 85 LPW

### Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed To Operate In Temperatures 113°F
- Housing Not Required. Two Spring Clips To Hold The Fixture In Place
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

### Lighting:

- MCT: The Switch Is On The Light Engine
- Dimming: 0~10V Dimmable
- Total Lumens: 1720LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

### Applications:

- Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

### Other Models:

- 15W | 1275LM | CRLC4-15W-MCT-SA-D
- 15W | 1275LM | CRLC4-15W-MCT-SA-D-WH






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-Z7-2D-2Z

## Photometrics: CRLC4-20W-MCT-SA-D

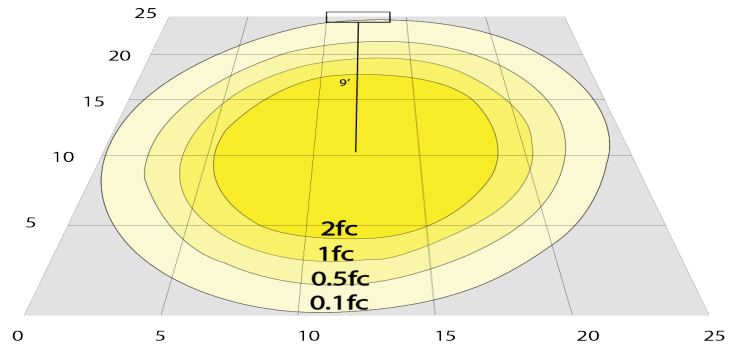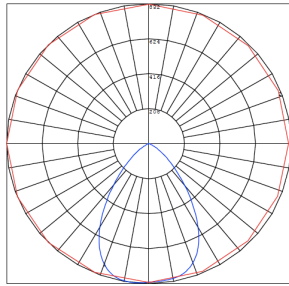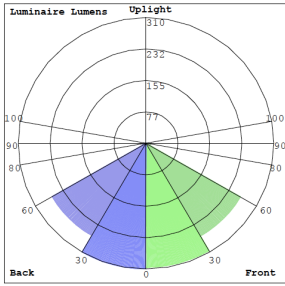

BUG Rating: B1-U1-G0


20W 5000K, Area 25" x 25" Mounting Height: 9'

## Other Views:

Hazel



CRLC-EGN-20W-MCT-D

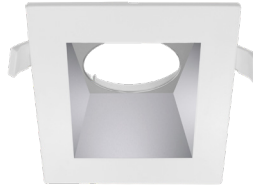

CRLC-TRM-4SA



CRLC4-20W-MCT-SA-D

White



CRLC-EGN-20W-MCT-D



CRLC-TRM-4SA-WH



CRLC4-20W-MCT-SA-D-WH

## Performance Table: CRLC4-20W-MCT-SA-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-20W-MCT-SA-D	20W	120-277V	1720LM	3000K	B1-U1-G0	85
CRLC4-20W-MCT-SA-D-WH				4000K		
				5000K		

## Sample Ordering

Model Watt Shape Dimming Housing  
 CRLC4 - 20W - MCT - SA - D -

Blank  
 WH = WHITE


### Accessory:

Blank = No Option For Accessories  
 SSL4-RI = 4" SQUARE ROUGH-IN PLATE, 26" LONG


### Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

### Accessory:



SSL4-RI  
 4" SQUARE ROUGH-IN  
 PLATE, 26" LONG



SSL4-RI  
 26"(W) x 6 1/5"(H)

### Factory-Installed Option:



OPT-EM-HB1EXT  
 EXTERNAL EMERGENCY  
 BACK UP BATTERY

## Example:

1. CRLC4-20W-MCT-SA-D (FOR 20W CRLC4 MCT 120-277V)

1. CRLC4-20W-MCT-SA-D OPT-EM-HB1EXT (FOR 20W CRLC4 MCT 120-277V) (EXTERNAL EMERGENCY BACK UP BATTERY)

