CRLC SERIES COMMERCIAL INDOOR LIGHTING




CRLC8-40W-MCTP-D CRLC8-40W-MCTP-D-WH

8" LED COMMERCIAL SQUARE & WALL WASH RECESSED LIGHT

Customer Name: Project Name: Note: Type:





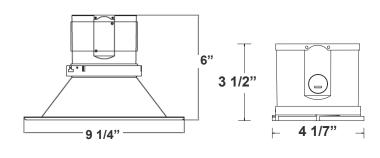

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

9 1/4"(L) X 6" (H)

-eatures

- 8" Haze & White Finish TRIM
- MCTP: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz Wattage: 27W/34W/40W

Power factor: >0.90 Efficacy: 80 LPW

Mechanical:

- 8" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCTP: The switch is on the light engine
- Dimming: 0~10V Dimmable Total lumens: 3200LM Max.
- Color temperature: 3000K/3500K4000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:

- 40W | 3200LM | CRLC6-40W-MCTP-SA-D
- 40W | 3200LM | CRLC6-40W-MCTP-SA-D-WH













Photometrics: CRLC8-40W-MCTP-D





20 15 10 2fc 1fc 0.5fc 0.1fc 10 25

BUG Rating: B1-U1-G0

40W 5000K, Area 25" x 25' Mounting Height: 9'

Other Views:










CRLC-TRM-8



CRLC8-40W-MCTP-D

White









CRLC-TRM-8-WH



CRLC8-40W-MCTP-D-WH

Performance Table: CRLC8-40W-MCTP-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC8-40W-MCTP-D	27W	120-277V	2160LM	3000K 3500K 4000K	B1-U1-G0	80
CRLC8-40W-MCTP-D-WH	34W		2720LM			
	40W		3200LM			

Sample Ordering

Model

Watt Color Temp Dimming Housing

CRLC8 **–** 40W **–** MCTP

Blank WH = WHITE

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Factory-Installed Option:



EXTERNAL EMERGENCY BACK UP BATTERY

Example:

1. CRLC8-40W-MCTP-D

1. CRLC8-40W-MCTP-D OPT-EM-HB1EXT

(FOR 40W CRLC8 MCTP 120-277V)

(FOR 40W CRLC8 MCTP 120-277V) (EXTERNAL EMERGENCY BACK UP BATTERY)





