CRLX SERIES COMMERCIAL INDOOR LIGHTING



CRLX4-14-27W-MCTP

X GEN. LED COMMERCIAL RECESSED LIGHT

Multi Color Temperature & Multi Power/Wattage (Selectable)




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name:

Project Name:

Note: Type:

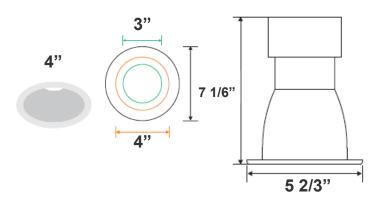

7 1/6"(H) X 5 2/3" (W) Mounting Diameters: 4"

eatures

- 4" Haze Finish TRIM
- MCTP: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

Technical Specifications

Electrical:

Voltage: 120-277VAC 50/60Hz Wattage: 14W/20W/27W

Power factor: >0.90

Efficacy: 80 LPW

Mechanical:

- 4" Haze Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to Operate in Temperatures 113°F
- No IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- MCTP: The switch is on the light engine
- Dimming: 1~10V Dimmable
- Total lumens: 2160LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >80
- Lifespan: 50,000 hrs.

Applications:

Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Other Models:

80W | 6800LM | CRLX6-50-80W-MP














Photometrics: CRLX4-14-27W-MCTP





BUG Rating: B1-U1-G0

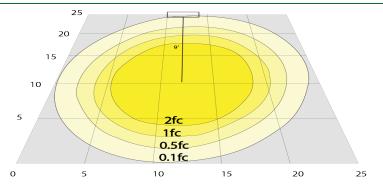

20W 5000K, Area 25" x 25' Mounting Height: 9'

Other Views:





CRLX-EGN-18-40W-MCTP Light Engine





CRLX-TRM-4 Trim



CRLX6-18-40W-MCTP Complete Unit

Performance Table: CRLX4-14-27W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLX4-14-27W-MCTP	14W	120-277V	1120LM	3000K 3500K 4000K	B1-U1-G0	80
	20W		1600LM			
	27W		2160LM			

Sample Ordering

Model Watt

Watt

Color Temp

CRLX4 =

- 14

– 27W **–**

MCTP

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-HB1EXT = EXTERNAL EMERGENCY BACK UP BATTERY

Factory-Installed Option:





