# CXES SERIES OUTDOOR LIGHTING




CXES-30-60W-MCTP-WH

SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS

Multi Color Temperature & Multi Power/Wattage (Selectable)



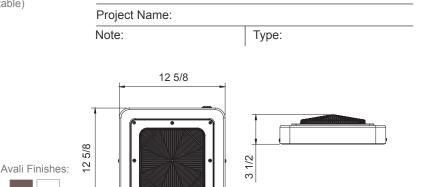

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

12 5/8"(L) X 12 5/8" (W) X 3 1/2"(H)

## **Features**

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

**Customer Name:** 

## **Technical Specifications**

#### **Electrical:**

Wattage: 30W/45W/60WInput Current: 0.6A MAX

Input Voltage: 120-277VAC 50/60Hz

Power Factor: >0.90LPW: 130LPW

#### Mechanical:

- Stamped Galvanized Steel
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

### Lighting:

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 7800LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°Lifespan: 70000 Hrs

## **Applications:**

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

#### Other Models:

30W | 3900LM | CXES-10-30W-MCTP-WH
80W | 10400LM | CXES-40-80W-MCTP-WH












#### Photometrics: CXES-30-60W-MCTP-WH

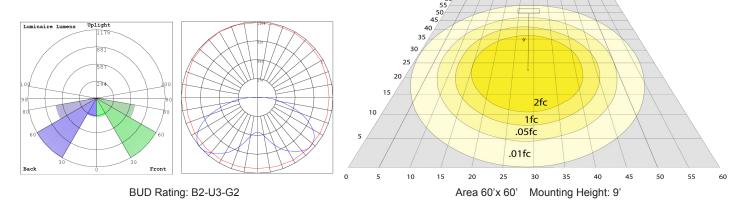

### **Other Views:**



#### Performance Table: CXES-30-60W-MCTP-WH

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXES-30-60W-MCTP-WH	30W 45W 60W	120~277V	3900LM 5850LM 7800LM	3000K 4000K 5000K	B2-U3-G2	130

## Sample Ordering

Model	Min.	Max.Wattage Color Temp. Housing
CXES -	30	<b>–</b> 60W <b>–</b> MCTP <b>–</b> WH

