CXES SERIES OUTDOOR LIGHTING

CXES-40-80W-MCTP-WH

SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS

MC PMulti Color Temperature & Multi Power/Wattage (Selectable)



Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights

Technical Specifications

Electrical:

- Wattage: 40W/60W/80W
- Input Current: 0.6A MAX •
- Input Voltage: 120-277VAC 50/60Hz
- Power Factor: >0.90
- LPW: 130LPW

Mechanical:

- Stamped Galvanized Steel ٠
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs •
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

Lighting:

- MCTP:Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10400LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

Applications:

- Indoor Parking
- **Commercial Buildings**
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:

30W | 3900LM | CXES-10-30W-MCTP-WH • 60W | 7800LM | CXES-30-60W-MCTP-WH



15 3/4"

15 3/4"(L) X 15 3/4"(W) X 3 3/4"(H)

3/4

0

- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty



Type:










Note:

3/4"

5

Avali Finishes:

Photometrics: CXES-40-80W-MCTP-WH

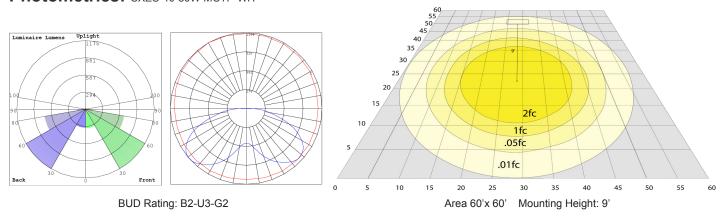

Other Views:





Front View



Switch View

Performance Table: CXES-40-80W-MCTP-WH

Side View

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXES-40-80W-MCTP-WH	40W 60W 80W	120~277V	5200LM 7850LM 10400LM	3000K 4000K 5000K	B2-U3-G2	130

Sample Ordering

Model	Min.	Max.Wat	Housing			
CXES -	40	– 80W		MCTP] -	WH

WESTGATE

