

9 SERIES - LED Tunable Troffer

The 9 SERIES - LED Tunable Troffer, 130 lm/W, Select 3X-CCT (3500K, 4000K, 5000K), Select from 3X-Wattages, 0-10V Dimmable, Premium Indoor Luminaire, Smart Sensor Ready.

Premium Features

Lumen Output	2600 to 5460 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3500K, 4000K, 5000K)
Size	2x2, 2x4
Warranty	7 Years

Applications

Premium indoor luminaire suitable for general indoor commercial spaces, lobbies, offices, meeting rooms, schools, retail stores, restrooms, hallways, and work-stations.

Construction

Manufactured for durability using aluminum sheet housing with satin coating to resist corrosion, discoloration, and scratching. Center-Basket Design. For use in Dry Locations.

Electrical

Input voltage 120-277V models with 0-10V Continuous Dimming. Includes 3X-CCT and 3X-Wattage Tuning Switches. Operating temperatures -4°F to 104°F (-20°C to 40°C).

Mounting

Recessed T-Bar Ceiling Mount.

Optics

Anti-UV Frosted Polycarbonate Lens.

Listings

UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant. Listed to qualify for energy-efficient LED lighting rebates.

Warranty

7 yr /75K hrs.

Project:
Date:
Catalog No:
Prepared By:

2x2 and 2x4 Models





Correlated Color Temperatures (CCT)

3500K

4000K

5000K



Specifications

Energy Data

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: Select (20W, 25W, 30W), (30W, 35W, 42W)

Power Factor: >0.9

Total Harmonic Distortion (THD): <10%

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

Lighting Data

Lumens: Select (2600, 3250, 3900), (3900, 4550, 5460)

Lumens Per Watt: 130 lm/W

Color Correlated Temperature (CCT): Select (3500K, 4000K, 5000K)

Dimmable: 0-10V

Color Rendering Index (CRI): >80

L70: 75000 hours

Ordering Information


Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
ETH-TTR-22-30W	2x2	(20W 25W 30W)	120-277V	0.17A@120V, 0.07A@277V 0.21A@120V, 0.09A@277V 0.25A@120V, 0.11A@277V	2600 3250 3900	130 lm/W	(3500K, 4000K, 5000K)	0-10V	White	23.74"L x 23.74"W x 4.00"H	8.50 lbs
ETH-TTR-24-42W	2x4	(30W 35W 42W)	120-277V	0.25A@120V, 0.11A@277V 0.29A@120V, 0.13A@277V 0.35A@120V, 0.15A@277V	3900 4550 5460	130 lm/W	(3500K, 4000K, 5000K)	0-10V	White	47.75"L x 23.74"W x 3.00"H	16.00 lbs

Shipping Information


Model	Unit Weight	Shipping Dimensions	Shipping Weight	Quantity /Box
2x2	8.50 lbs	25.00"L x 24.50"W x 4.25"D	10.60 lbs	1
2x4	16.00 lbs	49.50"L x 24.50"W x 4.00"D	19.00 lbs	1

Physical Dimensions


2x2 Models 23.74"L x 23.74"W x 4.00"H

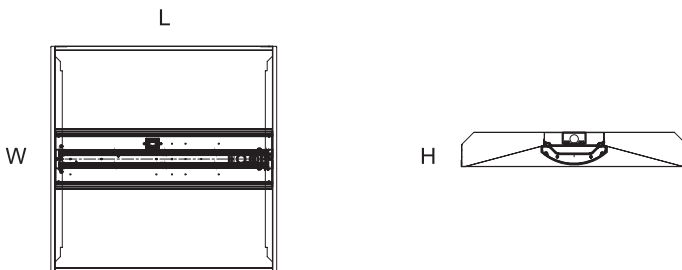

2x4 Models 47.75"L x 23.74"W x 3.00"H

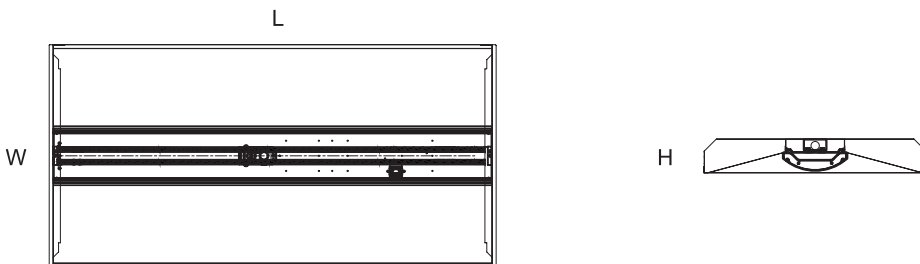

Photometric Characteristics

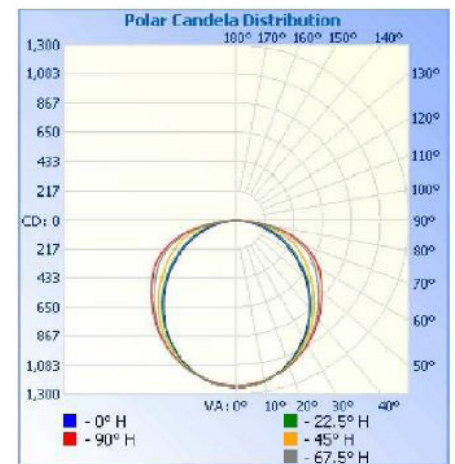

*Example of 2x2