

# FLDX SERIES OUTDOOR LIGHTING



FLDX-MD-10-30W-30K-BR  
FLDX-MD-10-30W-40K-BR  
FLDX-MD-10-30W-50K-BR  
X-GEN BULLET FLOOD LIGHTS

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_

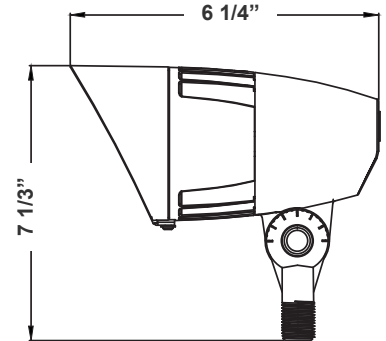

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

7 1/3"(H) x 6 1/4"(W) x 4 1/3"(D)

## Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- MP: Multi Power switch on the back of the fixture
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 10W/20W/30W
- Efficacy: 120 LPW

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Cord type: 18" SJTW 18/3 AWG cable
- 1/2" Threaded Knuckle Stem
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- MP: Multi Power switch on the back of the fixture
- Dimming: 0-10V Dimming
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- Total Lumens: 3700LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Lifespan: 70,000 Hrs.

### Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas. Great for use with motion sensors and another instant on/off controls.

### Other Models:

- 30W | 3700LM | FLDX-MD-10-30W-30K-BK
- 30W | 3700LM | FLDX-MD-10-30W-40K-BK
- 30W | 3700LM | FLDX-MD-10-30W-50K-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-07052022

## Photometrics: FLDX-MD-10-30W-BR

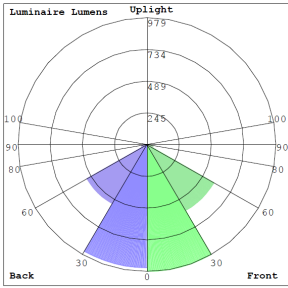

BUG Rating: B2-U0-G0

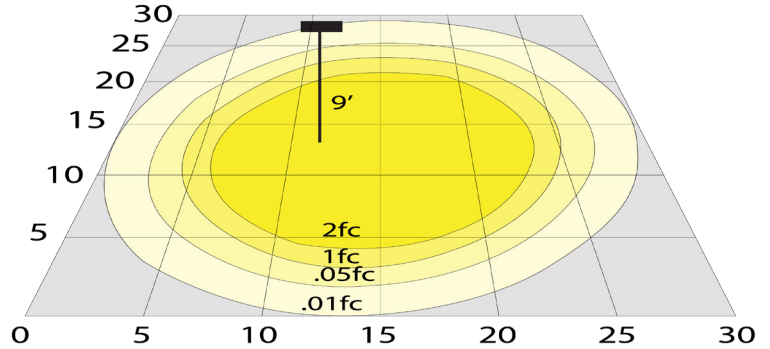

30W 3000K, Area 30'x 30' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: FLDX-MD-10-30W-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLDX-MD-10-30W-30K-BR	10W 20W 30W	120-277V	3700LM	3000K	B2-U0-G0	120
FLDX-MD-10-30W-40K-BR				4000K	B2-U0-G0	
FLDX-MD-10-30W-50K-BR				5000K	B2-U0-G0	

## Sample Ordering

Model	Size	Min. Watt	Max. Watt	Color Temp.	Finish
FLDX	MD	10	30W		BR
				30K = 3000K 40K = 4000K 50K = 5000K	

## ACCESSORY:

Blank = No Option For Accessories  
 FLDVX-FS-MD-BR = X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE  
 FLDVX-MD-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR MD SIZE HOUSING

## ACCESSORIES:



**FLDVX-FS-MD-BR**  
 X-GEN BULLET REPLACEMENT FLAT SHROUD  
 FOR MD SIZE HOUSING, BRONZE

## Example:

1. FLDX-MD-10-30W-30K-BR (FOR FLDX 30W 30K FIXTURE 120-277V)
2. FLDX-MD-10-30W-30K-BR (FOR FLDX 30W 30K FIXTURE 120-277V)  
 FLDVX-FS-MD-BR (X-GEN BULLET REPLACEMENT FLAT SHROUD FOR MD SIZE HOUSING, BRONZE)

