

FLVXPRO SERIES OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

FLVXPRO-MD-10-30W-MCTPB-BR
POWER, CCT & BEAM ANGLE-ADJUSTABLE LED X-GEN BULLET FLOOD LIGHTS
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



AVAIL. FINISH:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

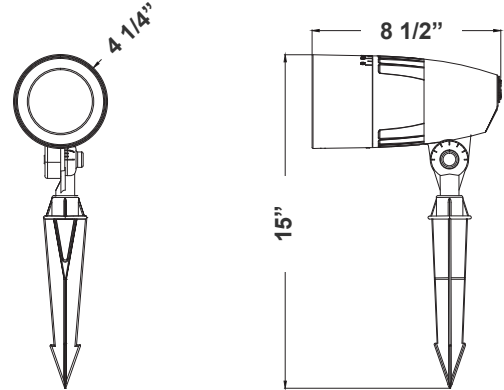

15"(H) x 8 1/2"(W) x 4 1/4"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 10W/20W/30W
- Input current: 1A Max
- Efficacy: 90 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- DC Button Photocell with ON/OFF switch Included
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- Dimmable: Non Dimmable
- Total lumens: 2700 LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: Adjustable from 25°-65° by Rotating the Lens
- Lifespan: 70,000 Hrs.

Applications:

- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- 30W | 2700LM | FLVXPRO-MD-10-30W-MCTPB-BK





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-07/072022

Photometrics: FLVXPRO-MD-10-30W-MCTPB-BR

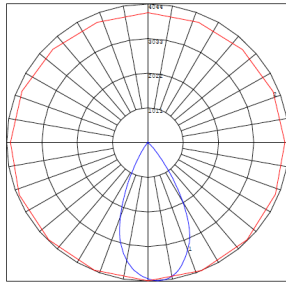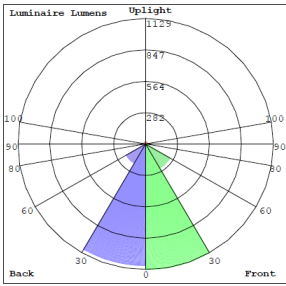

BUG Rating: B3-U2-G0

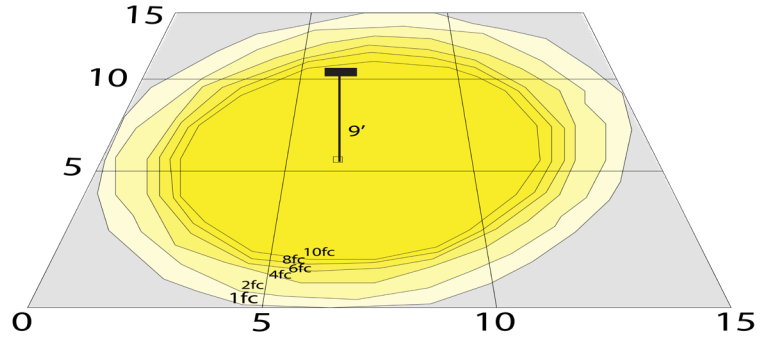

30W 5000K, Area 15'x 15' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLVXPRO-MD-10-30W-MCTPB-BR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLVXPRO-MD-10-30W-MCTPB-BR	10W	120-277V	900LM	3000K	B3-U2-G0	90
	20W		1800LM	4000K		
	30W		2700LM	5000K		

Sample Ordering

Model Size Watt Watt Color Temp. Finish
 FLVXPRO - MD - 10 - 30W - MCTPB - BR

Accessories:

Blank = No Option For Accessories
 A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish
 LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables
 LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables
 LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables
 A-41-S = Tree Mounting Base
 LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish
 BC-13 = 13" Bungee Cords with Hooks
 BC-18 = 18" Bungee Cords with Hooks
 BC-24 = 24" Bungee Cords with Hooks
 BC-32 = 32" Bungee Cords with Hooks
 FLDVX-SM-RL35 = X-GEN BULLET REPLACEMENT 35-DEGREE REPL. LENS FOR SM SIZE HOUSING

ACCESSORIES:



A-41-BR
 1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



LSWN1
 Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



LSWN2
 Box of 24, Waterproof wire connectors, for up to three 12-2 cables



LSWN2-100
 Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



A-41-S
 Tree mounting base



LG-SMB-BZ
 12V brass landscape tree or surface bracket, antique bronze finish



BC-13/18/24/32
 13"/18"/24"/32" Bungee cords with hooks

