

## FMM FLUSH MOUNT MODERN (CCT5)

### DESCRIPTION

naturaLED® Flush Mount Modern (FMM) Features a white acrylic diffuser with a sleek, compact design. This energy-efficient LED solution will provide up to 86% energy savings over incandescent lighting. FMM series ceiling lights are perfect for kitchens, open areas, hallways, bedrooms, or other decorative lighting. FMM mounts flush to the ceiling or wall, it is suitable for residential or commercial applications. This design features a low-profile body with nickel finish accents and a white acrylic diffuser. Available in three sizes, replacing up to 200W incandescent, and 5 selectable color temperatures.

### APPLICATIONS

Kitchen, Decoration, Hallway, Bedroom, Hospitality, Ceiling Mount Lighting

### FEATURES

- Energy Star
- Damp Location
- ETL Listed
- Color Temp: 5CCT (2700K,3000K,3500K,4000K,5000K)
- Voltage: 120V
- Powerfactor >0.9
- Dimmable
- CRI: >90
- Beam Angle: Flood
- Operating temperature: -4°F - 104°F
- Uniform light distribution and consistent color
- Lightweight and easy installation
- Retrofit for Incandescent and CFL flush mount
- Recommended ceiling height: 8-10ft
- Material: Aluminum housing & white acrylic
- 5 Year Warranty

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



### SAMPLE NUMBER LED12FMM-126L9CCT5-NI

STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP	COLOR
LED	12	FMM	126L	9	CCT5	NI
LED Lighting	12-inch	Flush Mount Modern	1,260 Lumens	CRI 90	2700K 3000K 3500K 4000K 5000K	Nickel



# FLUSH MOUNT MODERN CCT5

CEILING & AREA LUMINAIRES

## ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location	Energy Star
18	9356	LED12FMM-126L9CCT5-NI	5CCT(27/30/35/40/50K)	1,260	120	12"	•	•
24	9357	LED14FMM-180L9CCT5-NI	5CCT(27/30/35/40/50K)	1,800	150	14"	•	•
24	9358	LED16FMM-190L9CCT5-NI	5CCT(27/30/35/40/50K)	1,900	200	16"	•	•

## ACCESSORIES (Ordered Separately)


### Emergency Driver




7337 BAEM25-170BC/347-C  
(25W Micro Inverter for 120-347 with 12" Conduit)

## DIMENSIONS


**18W (12-inch)**  
1.72-lbs

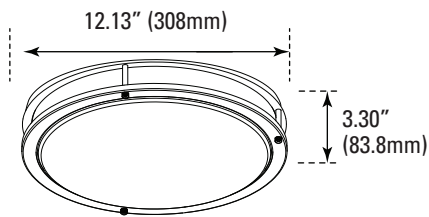

**24W (14-inch)**  
2.49-lbs

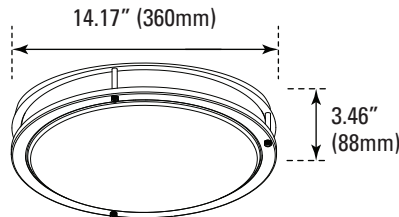


**24W (16-inch)**  
3.01-lbs

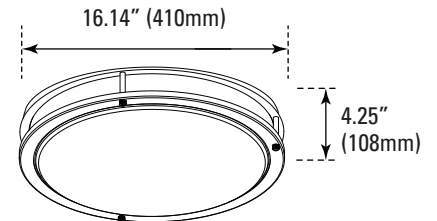

## PHOTOMETRICS CHART

## PACKAGE


**18W (12-inch)**  
Energy Star

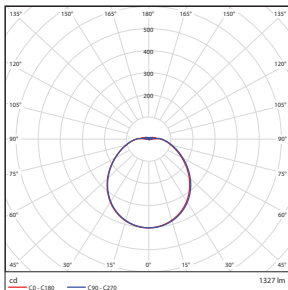

Center Beam fc	Beam Width
1.3R: 237 fc	3.8 ft 3.9 ft
2.7R: 55.1 fc	7.9 ft 8.1 ft
4.0R: 25.1 fc	11.8 ft 12.0 ft
5.3R: 14.3 fc	15.6 ft 15.8 ft
6.7R: 8.94 fc	19.7 ft 20.0 ft
8.0R: 6.27 fc	23.5 ft 23.9 ft

Vert. Spread: 111.6°  
Horiz. Spread: 112.4°


**24W (14-inch)**  
Energy Star

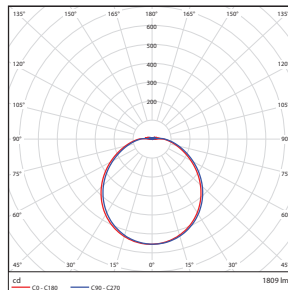

Center Beam fc	Beam Width
1.3R: 328 fc	4.0 ft 4.0 ft
2.7R: 76.1 fc	8.3 ft 8.3 ft
4.0R: 34.7 fc	12.2 ft 12.2 ft
5.3R: 19.7 fc	16.2 ft 16.2 ft
6.7R: 12.4 fc	20.5 ft 20.5 ft
8.0R: 8.67 fc	24.5 ft 24.5 ft

Vert. Spread: 113.7°  
Horiz. Spread: 113.6°

**24W (16-inch)**  
Energy Star

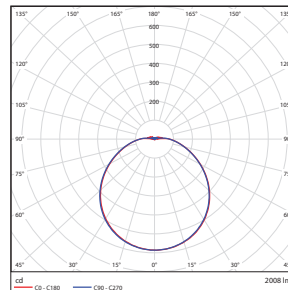

Center Beam fc	Beam Width
1.3R: 347 fc	4.3 ft 4.3 ft
2.7R: 80.4 fc	8.9 ft 9.0 ft
4.0R: 36.6 fc	13.2 ft 13.3 ft
5.3R: 20.9 fc	17.5 ft 17.6 ft
6.7R: 13.0 fc	22.2 ft 22.3 ft
8.0R: 9.15 fc	25.5 ft 26.6 ft

Vert. Spread: 117.7°  
Horiz. Spread: 117.9°

**Case Qty**  
2 pcs

