

FMR FLUSH MOUNT ROUND (CCT5)

DESCRIPTION

naturaLED® Flush Mount Round (FMR) Features a white acrylic diffuser with a sleek, compact design. This LED lighting solution is designed to replace your current incandescent or fluorescent lighting with up to 86% energy savings. Our easy latch system secures the diffuser to the housing, making for quick installation. Mounting flush to the ceiling or wall, it is suitable for residential, commercial, hospitality and many more applications.

APPLICATIONS

Kitchen, Decoration, Hallway, Bedroom, Hospitality, Ceiling Mount Lighting

FEATURES

- Energy Star
- Damp Location
- ETL Listed
- Color Temp: 5CCT (2700K,3000K,3500K,4000K,5000K)
- Voltage: 120V
- Powerfactor >0.9
- Surge Protection: 2KV
- Dimmable
- CRI: >90
- Beam Angle: Flood
- Operating temperature: 5°F - 104°F
- Uniform light distribution and consistent color
- Lightweight and easy installation
- Retrofit for Incandescent and CFL flush mount
- Easy-latch system
- Recommended ceiling height: 8-10ft
- Color: White
- 5Year Warranty

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:



Easy-latch system



Rated Life 50,000 Hours
Warranty 5 Years

ACCESSORIES



Replacement Lens

RETROFIT / SAVE ENERGY

Replace Incandescent and CFL light with LED



Incandescent and CFL

LED

SAMPLE NUMBER LED12FMR-112L9CCT5

STYLE	DIAMETER	SERIES	LUMEN	CRI	COLOR TEMP
LED	12	FMR	112L	9	CCT5
LED Lighting	12-inch	Flush Mount Round	1,120 Lumens	CRI 90	2700K 3000K 3500K 4000K 5000K



FLUSH MOUNT ROUND CCT5

CEILING & AREA LUMINAIRES

ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location	Energy Star
14	9359	LED12FMR-112L9CCT5	5CCT	1,120	100	12"	•	•
24	9360	LED16FMR-200L9CCT5	5CCT	2,000	150	16"	•	•

ACCESSORIES (Ordered Separately)

Replacement Lens



P10132 LENS-12FMR
(Replacement Lens for 12" FMR)



P10133 LENS-16FMR
(Replacement Lens for 16" FMR)


Emergency Driver




7337 BAEM25-170BC/347-C
(25W Micro Inverter 120-347 with 12" Conduit)

DIMENSIONS

14W (12-inch)
1.12-lbs

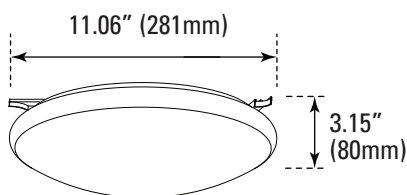


24W (16-inch)
2.34-lbs

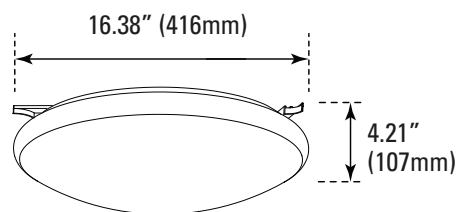

PHOTOMETRICS CHART


14W (12-inch)
Energy Star

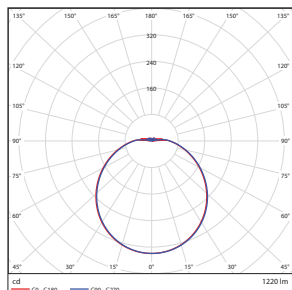

Center Beam Fc	Beam Width	
201 fc	4.5 ft	4.5 ft
46.5 fc	9.4 ft	9.4 ft
21.2 fc	13.9 ft	13.9 ft
12.1 fc	18.4 ft	18.4 ft
7.56 fc	23.3 ft	23.3 ft
5.30 fc	27.8 ft	27.8 ft

■ Vert. Spread: 120.2°
■ Horiz. Spread: 120.1°

24W (16-inch)
Energy Star

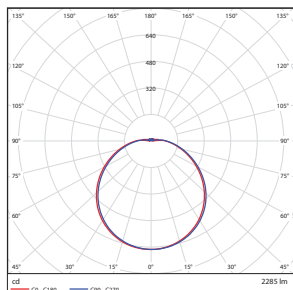

Center Beam Fc	Beam Width	
387 fc	4.5 ft	4.5 ft
89.7 fc	9.3 ft	9.3 ft
40.9 fc	13.8 ft	13.7 ft
23.3 fc	18.3 ft	18.2 ft
14.6 fc	23.1 ft	23.0 ft
10.2 fc	27.6 ft	27.5 ft

■ Vert. Spread: 119.8°
■ Horiz. Spread: 119.6°

PACKAGE

Case Qty
5 pcs

