



Product Overview

Featuring precise parking garage light distribution in a modern design, the GKOCPO3 Circular Canopy Light is ideal for providing illumination for parking garages, storage areas, and other locations where visibility is important for security purposes. An optional center-mounted, integrated motion sensor is available for additional energy savings.



Key Features

CONSTRUCTION:

- Rugged die-cast aluminum housing with integral heat sink fins.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.
- Housing is completely sealed against moisture and environmental contaminants.

FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

OPTICS:

- Parking garage light distribution.
- Light engines are available in standard 4000K and 5000K configurations.
- A range of lumen options available from 3,546 to 7,100 Lumens, replaces up to 175W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

ELECTRICAL:

- Universal 120-277V or 347V input voltage.
- 1-10V dimming driver(s) optional.
- THD: $\leq 20\%$, Power Factor: $\geq 90\%$.

CONTROLS:

- Optional center-mounted, integrated multi-level motion sensor - BRI823.
- Optional emergency battery backup provides up to 90 minutes of operation during outages.

INSTALLATION:

- Surface mount or pendant mount options are available.
- Quick-mount bracket eliminates the need to open luminaire for installation.

LIFESPAN:

- 5 Year Limited Warranty.

LISTINGS:

- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 104°F (-40°C to 40°C).

Performance Data




Lumen Output

System Watts	Voltage	Photometry	4000K(70CRI)		5000K(70CRI)	
			Lumens	Efficacy	Lumens	Efficacy
30W	120-277V	Parking Garage	3546lm	116lm/W	3600lm	120lm/W
45W	120-277V	Parking Garage	4897lm	110lm/W	5000lm	111lm/W
60W	120-277V	Parking Garage	7000lm	117lm/W	7100lm	118lm/W


Dimensions & Weight

Light Distribution

Parking Garage Pattern

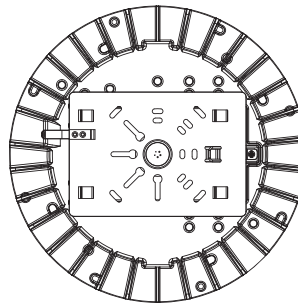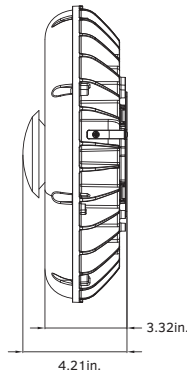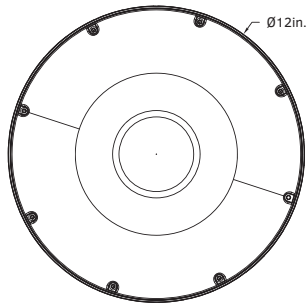

Weight: 30W: 5.29lb.
45W: 5.40lb.
60W: 5.73lb.

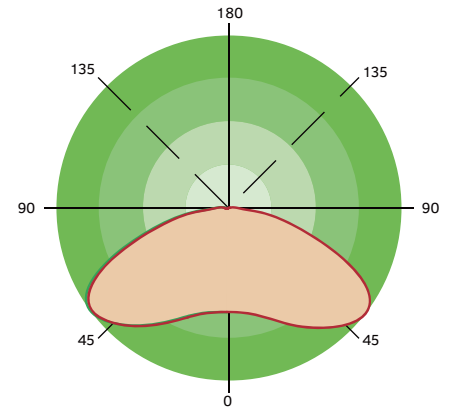

Ordering Information

Circular Canopy Light Series GKOCPO3

Example: GKOCPO360W27V50KWMDPG

Fixture Type	Wattage	Voltage	CCT	Finish	Sensor (Optional)	Dimmable (Optional)	Light Distribution	Emergency Battery
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
GKOCPO3	30W 45W 60W	27V 120-277V 34V 347V	40K 4000K 50K 5000K	D Dark Bronze B Black W White	M With 120-277V Sensor Blank Without Sensor	D 1-10V Dimmable Blank Non-Dimmable	PG Parking Garage LB Low Bay	B Emergency Battery Blank No Battery