



**TUNABLE POWER & CCT:**  
100W



**TUNABLE POWER & CCT:**  
38W / 65W

**FIXED POWER & CCT:**  
26W / 38W / 65W / 100W / 135W

## Product Overview

Series GKOWPG15 Slim Full Cutoff Wall Packs feature a low profile full cutoff design that minimizes vertical light to reduce glare and light pollution. Power & CCT Adjustment Controls are optional on 38W, 65W and 100W models, enabling the lighting professional to adjust light output to meet varied project requirements.



## Key Features

### CONSTRUCTION:

- Rugged two-piece die-cast aluminum housing.
- 3G vibration rated for areas with traffic, meeting ANSI standards C136.31.
- Housing has direct contact with the driver to help maintain low temperature and long lifespan.

### FINISH:

- The exterior is protected by a rust-resistant powder coat finish that provides superior resistance to weathering and corrosion.

### OPTICS:

- Full cutoff design minimizes glare and light pollution.
- Light engines are available in 3000K, 4000K and 5000K configurations.
- A range of lumen options available from 3,800 to 20,000 Lumens, replaces up to 400W metal halide.
- Impact and UV-resistant polycarbonate lens is precisely designed to give a specific light distribution, maximizing efficiency and application spacing.

### ELECTRICAL:

- Universal 120-277V input voltage.
- 0-10V dimming driver(s) as default.
- THD: ≤20%, Power Factor: ≥90%.

### CONTROLS:

- Power & CCT adjustment controls optional on 38W, 65W and 100W models.
- Optional button photocell for additional energy savings - PO 120-277V.
- Optional emergency battery backup provides up to 90 minutes of operation during outages.

### INSTALLATION:

- Wall mount or junction box mount options are available.

### WARRANTY:

- 5 Year Limited Warranty.

### LISTINGS:

- DesignLights Consortium® (DLC) Premium qualified.
  - Fixed Power & CCT - Not DLC
  - Tunable Power & CCT - DLC Premium
- UL listed for wet locations.
- Rated for ambient operating temperature -40°F to 104°F (-40°C to 40°C).
  - With emergency battery backup, rated for ambient operating temperature 50°F to 104°F (10°C to 40°C).

# Performance Data

## Fixed Power & CCT Model Lumen Output

System Watts	Voltage	3000K(70CRI)		4000K(70CRI)		5000K(70CRI)	
		Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens
26W	120-277V	3800lm	146lm/W	3900lm	150lm/W	3900lm	150lm/W
38W	120-277V	5600lm	147lm/W	5700lm	150lm/W	5700lm	150lm/W
65W	120-277V	9500lm	146lm/W	9700lm	149lm/W	9700lm	149lm/W
65W	347-480V	9400lm	145lm/W	9500lm	146lm/W	9500lm	146lm/W
100W	120-277V	14800lm	148lm/W	15000lm	150lm/W	15000lm	150lm/W
100W	347-480V	14000lm	140lm/W	14500lm	145lm/W	14500lm	145lm/W
135W	120-277V	19000lm	141lm/W	20000lm	148lm/W	20000lm	148lm/W

## Power & CCT Tunable Model Lumen Output

System Watts	Voltage	3000K(70CRI)		4000K(70CRI)		5000K(70CRI)	
		Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens
38W	120-277V	5600lm	147lm/W	6000lm	158lm/W	5700lm	150lm/W
65W	120-277V	9500lm	146lm/W	10000lm	154lm/W	9700lm	150lm/W
65W	347-480V	9400lm	145lm/W	9900lm	152lm/W	9500lm	146lm/W
100W	120-277V	14800lm	148lm/W	15500lm	155lm/W	15000lm	150lm/W
100W	347-480V	14000lm	140lm/W	15000lm	150lm/W	14500lm	145lm/W

## Adjustable Lumen Output Table

Setting	Voltage	38W		65W		100W	
		System Watts	Lumens (5000K)	System Watts	Lumens (5000K)	System Watts	Lumens (5000K)
100%	120-277V	38.12	5690.70	64.93	9816.80	103.20	14950.00
80%	120-277V	30.95	4871.24	49.30	7873.07	84.21	12725.44
60%	120-277V	23.01	3697.60	34.47	5782.90	61.92	9548.57
40%	120-277V	16.89	2789.20	23.37	4042.90	42.83	6667.70

## Electrical Data


Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	450	26	120	0.22
		26	208	0.13
		26	240	0.11
		26	277	0.09
1	680	38	120	0.32
		38	208	0.18
		38	240	0.16
		38	277	0.14
1	1170	65	120	0.54
		65	208	0.31
		65	240	0.27
		65	277	0.23
		65	347	0.19
		65	480	0.14

# Electrical Data

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	2520	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
		100	347	0.29
1	1200	100	480	0.21
		135	120	1.13
		135	208	0.65
		135	240	0.56
		135	277	0.49


# Dimensions & Weight

**Fixed Power & CCT: 26W/38W/65W/100W/135W**  
**Tunable Power & CCT: 38W/65W**

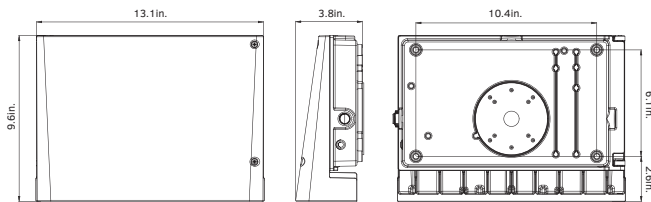

Weight  
 26W: 5.115lb.  
 38W: 5.335lb.  
 65W: 5.798lb.  
 100W: 5.82lb.  
 135W: 5.86lb.

**Tunable Power & CCT: 100W**

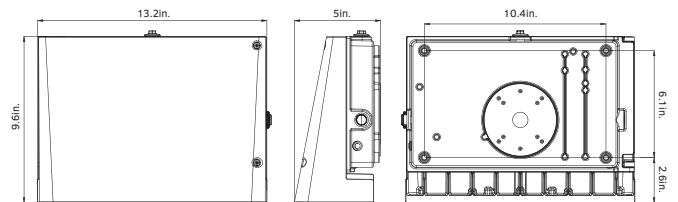

Weight  
 100W: 5.82lb.

# Ordering Information

Slim Full Cutoff Wall Pack Series GKOWPG15							Example: GKOWPG1565W50KDAD				
Fixture Type	Wattage	Voltage	CCT	Finish	Photocell (Optional)	Battery Backup (Optional)	Power & CCT Tunable	Internal Code			
<b>GKOWPG15</b>	<b>26W</b>	<b>27V</b> 120-277V	<b>DDK</b> Adjustable	<b>D</b> Dark Bronze	<b>P0</b> 120-277V Photocell	<b>B</b> With Battery	<b>AD</b> With Adjustment Controls	<b>Blank</b>			
	<b>38W</b>	<b>48V</b> 347-480V	<b>30K</b> 3000K	<b>B</b> Black	<b>Blank</b> Without Photocell	<b>Blank</b> Without Battery	<b>Blank</b> Without Adjustment Controls	<b>Alphanumeric</b>			
	<b>65W</b>		<b>40K</b> 4000K	<b>W</b> White							
	<b>100W</b>		<b>50K</b> 5000K								
	<b>135W</b>										

Note: 1. Only 65W and 100W are available in 347-480V.  
 2. 26W and 135W are only available in a fixed wattage and CCT configuration.



10330 Argonne Woods Dr. Ste. 200  
 Woodridge, IL 60517  
**Phone:** 630-793-9449  
**Web:** www.gkoled.com