




KTLD-12-UV-SC500-56-VDIM-AF1/USB

CONSTANT POWER PROGRAMMABLE LED DRIVER

DESCRIPTION

LED Driver | 12W | 120–277V Input | 120–500mA Programmable Output Current

TOTAL POWER: 12W	OUTPUT CURRENT: 120–500mA
INPUT VOLTAGE: 120–277Vac ±10%	DIMMING: 0–10V
INPUT FREQUENCY: 50/60 Hz	WARRANTY: 5 Years

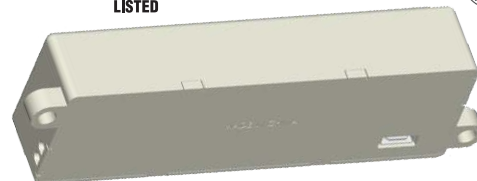


PRODUCT FEATURES

- Built in USB-C Port for easy programming
- Meets FCC Part 15 (Class B) consumer limits
- Short circuit overload and open load protection
- Dimmable with 0–10V dimmer (down to 1% at max. output current)
- THD: < 20%
- –40°C/–40°F to 60°C/140°F operating temperature
- 90°C/194°F maximum case temperature
- Input frequency: 60 Hz
- Programmable output current via USB-C cable and an Android device (plus Keystone app) or PC (plus Keystone software)
- Class A Sound Rating

PROGRAMMING FEATURES

- Drive current (10mA increments)
- Minimum dimming level (1%, 3%, 5%, 7%, or 10%)
- Dimming curve (linear log, inverse log, or square-law)
- Minimum dimming voltage (1V, 1.5V, or 2V)
- Maximum dimming voltage (7V, 8V, or 9V)
- Dim-to-off voltage (0.8V, 1V, 1.2V, or N/A)
- Thermal foldback temperature (75°C/167°F, 80°C/176°F, 85°C/185°F, or 90°C/194°F)

WHAT'S NEEDED?
A Smart Current Programmable LED Driver, USB-C Cable, and a computer or phone

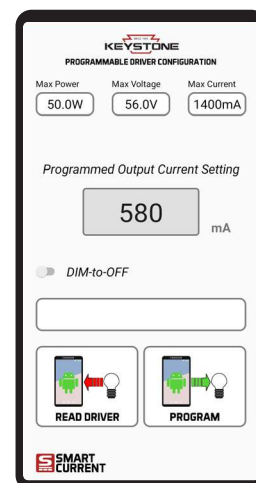

REQUIRED ACCESSORIES

Order Code	Description
KTLD-SC-USBC	USB-C to USB-C Cable (included with driver)

ELECTRICAL SPECIFICATIONS

Input Voltage Range	120–277Vac ±10%
Frequency	50/60 Hz
Power Factor	>0.9 under 120Vac Input with 80~100% load condition (for all output currents)
Inrush Current	24A _{peak} @ 277Vac, i ² t = 0.01728 A ² s
Max. Input Current	0.14A @120V, 0.07A @240V, 0.06A @277V
THD	<20% under 120Vac input with 80~100% load condition (for all output currents)
Load Regulation	± 2%
Line Regulation	± 1%
Output Tolerance	± 5% at full load condition
Turn-On Delay Time	<0.50 seconds at full load condition
Overshoot	<10% at full load condition
No Load Power Consumption	<1W
Ripple and Noise (pk-pk)	<10%
Withstand Voltage	Input to output, 2,800Vdc, 2mA
Leakage Current	Maximum 0.5mA at 277Vac, 60Hz input
Protection	<ul style="list-style-type: none"> • Over Voltage Protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. • Over Current Protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. • Short Circuit Protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.




KTLD-12-UV-SC500-56-VDIM-AF1/USB

CONSTANT POWER PROGRAMMABLE LED DRIVER


PRODUCT SPECIFICATIONS

Max. Output Power	Output Current	Output Voltage	OCV	Typical Efficiency at 120V	Typical Efficiency at 240V	Typical Efficiency at 277V	Remote Mounting Distance (#22 AWG)	Class 2	
								US	Canada
12W	120-500mA	10-56V	60V	85%	84%	83%	24 ft.	✓	

LED DRIVER OUTPUT WINDOW

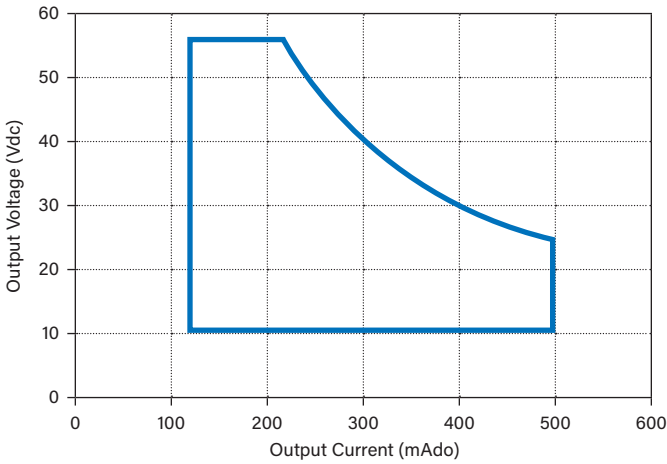


PHYSICAL SPECIFICATIONS

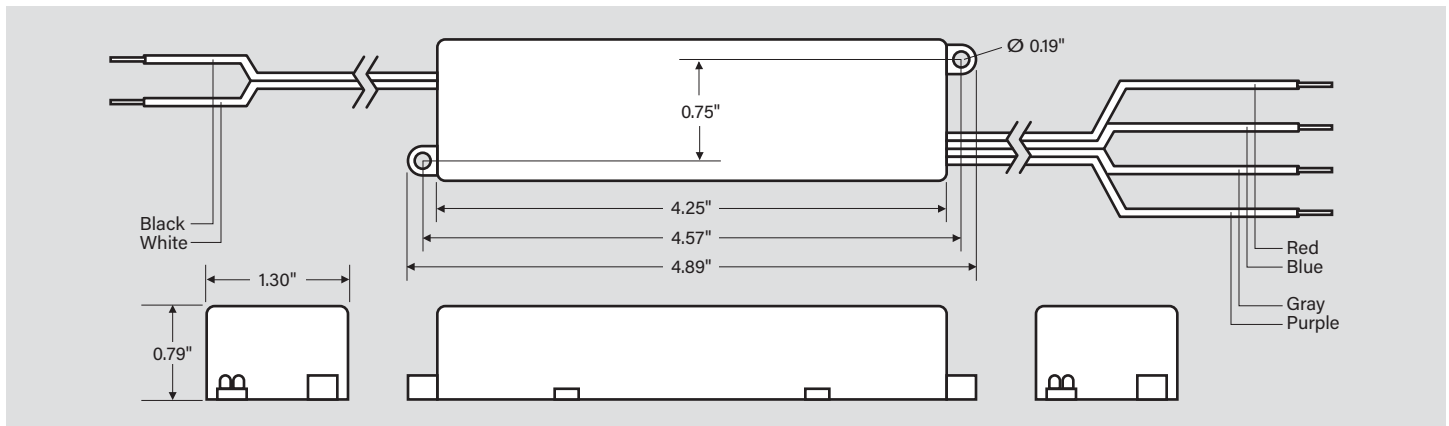

WIRING SPECIFICATIONS

Input	Black	12.00", UL 1316 #18AWG
	White	12.00", UL 1316 #18AWG
Output	Blue	12.00", UL 1430 #22AWG
	Red	12.00", UL 1430 #22AWG
	Purple	12.00", UL 1430 #22AWG
Dimming	Purple	12.00", UL 1430 #22AWG
	Gray	12.00", UL 1430 #22AWG

WIRING DIAGRAM

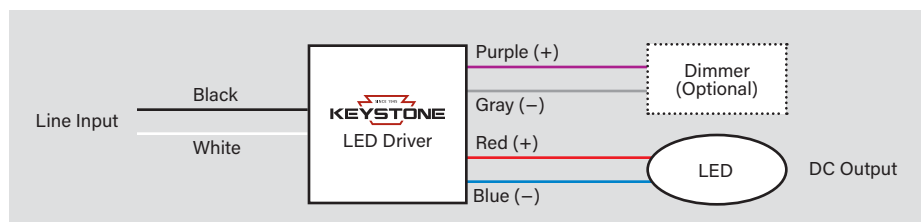



KTLD-12-UV-SC500-56-VDIM-AF1/USB

CONSTANT POWER PROGRAMMABLE LED DRIVER

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40°C/-40°F to 60°C/140°F
Storage Temperature	-40°C/-40°F to 85°C/185°F
Humidity	5% to 95%
MTBF	358,000 hrs at 40C ambient
Life Rating	85,000 hrs at 120V, 100% load
Maximum Case Temperature	90°C/194°F

SAFETY AND EMC COMPLIANCE

UL/cUL	UL 8750 pending, UL1310 Class 2
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (consumer limit)
EN61000-3-2	Harmonic Current Emissions Class C

ORDERING INFORMATION

ORDER CODE	PACK QUANTITY	EASY CODE	UPC
KTLD-12-UV-SC500-56-VDIM-AF1 /USB	40	FIN-26	843654140803

CATALOG NUMBER BREAKDOWN

KTLD-12-UV-SC500-56-VDIM-AF1 /USB

1

2

3

4

5

6

7

8

9

- 1 Keystone Technologies LED Driver
- 2 Max. Output Wattage
- 3 120-277V Input
- 4 Smart Current
- 5 Max. Output Current
- 6 Max. Output Voltage
- 7 0-10V Dimming
- 8 Case Style
- 9 USB Port