



# LED Post Top Light LED-9800

Wattage / CCT Selectable



## LED Post Top Light

### Product Description:

Corrosion resistant heavy duty-cast aluminum

Cooling channels allow vertical airflow



FAO controller allows for different CCTs and wattages to choose from.



Photocell



Optional Mount

Standard 3" open on the bottom with 2 3/8" sleeve


UV polycarbonate Optic Lens



Optional 180° Shield with adder



Standard 10KV Surge



Wiring Compartment on the Top for easy access and ease of installation.



Photocontrol



480V Max Receptacle



### Product Description:

This post top provides a subtle but stylish look for any job site. It is designed to save energy and reduce installation time. Optional photocontrol options allow for additional energy savings.

This post top is perfect for your architectural street lighting needs.

### Features:

#### LISTING

► UL and CUL listed for WET LOCATIONS.

#### HOUSING

► Corrosion resistant heavy duty-cast aluminum construction. Standard 3" open on the bottom. Pass 3 G vibration testing.

► Wiring Compartment on the Top for easy access and ease of installation.

#### FINISH

► Superior powder coat finish to withstand the toughest weather.

► Standard bronze with color options.

#### OPTIONS

► Optional 480V with adder

► Optional 180° Shield with adder

### APPLICATIONS

	Street & Tunnel
	Park
	Gas Station
	Parking
	Industrial Site



\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to +10%



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com  
2750 South 163<sup>rd</sup> St  
New Berlin, WI 53151



Warehouse-Lighting.com  
Phone: 888-454-4480  
info@warehouse-lighting.com

# LED Post Top Light

# LED Post Top Light

## Performance Data

Model NO.	Nominal Watts	Lumen*	Efficacy*
LED-9800	45 / 60 / 80W	10327 lm*	126.8 lm/w*
	100 / 125 / 160W	20039 lm*	126.7 lm/w*

\*Lumen and Efficacy are based on the highest wattage at 5000K

## Specification:


Example: LED-9800

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
LED-9800	80=80W	UNV=120-277V	7=70+	TX = 3000K 4000K 5000K	T5=Type VS	OS=Occupancy Sensor	BZ=Bronze BK=Black SL=Silver WH=White	-40°C
	160=160W	HV4=277-480V				HSS=180° Shield		

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

## Dimension:

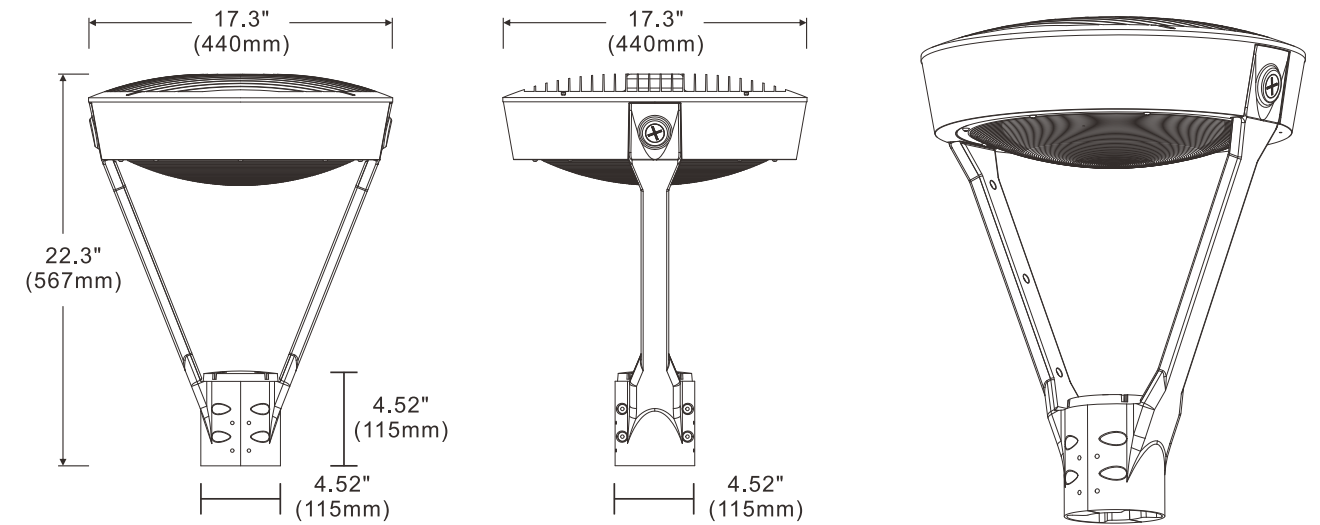

\* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

\*\* DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.



Warehouse-Lighting.com  
2750 South 163<sup>rd</sup> St  
New Berlin, WI 53151

[Warehouse-Lighting.com](http://Warehouse-Lighting.com)  
Phone: 888-454-4480  
[info@warehouse-lighting.com](mailto:info@warehouse-lighting.com)