


LFX-XS SERIES Outdoor Lighting

LFX-XS-15W-30K-KN
LFX-XS-15W-40K-KN
LFX-XS-15W-50K-KN


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Customer Name: _____

Project Name: _____

Note: _____ Type: _____

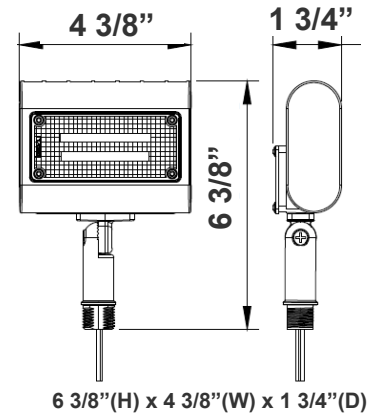

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- DLC Premium & LED High-Lumen Flood lights
- Solid State Lighting Technology for Long Life
- No Maintenance Needed and High-Efficiency
- 70,000 Hours Rated Life
- 7-Year Warranty
- Optic Lens Type: III

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 15W
- Power Factor: >0.9
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze and White Finish)
- LED: Philips Lumileds Luxeon 2835 High Flux LED
- Solid State Lighting technology for long life, no Maintenance needed and High-Efficiency
- High Conductive Aluminum LED Board
- 90° Adjustable 1/2" Knuckle Mount
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations

Lighting:

- Dimming: 0~10V Dimmable
- Optic Lens Type: III
- Cord type: 13" #18 AWG stranded wires
- Total Lumens: 1950
- Color Temperature: 3000K/ 4000K/ 5000K
- Color Rendering Index: ≥ 82
- Beam Angle: 120°X 90°

Applications:

- Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas.
- Replace existing HID flood lights/ wall packs



Lighting Supplier Since 2003





WAREHOUSE-LIGHTING.COM


Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com

Photometrics: LFX-XS-15W-KN

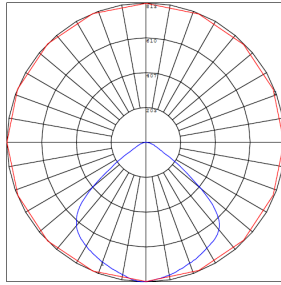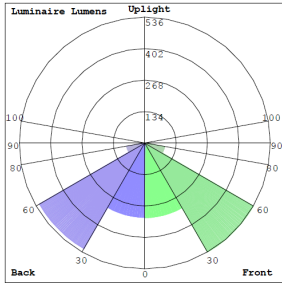

BUG Rating: B1-U0-G0

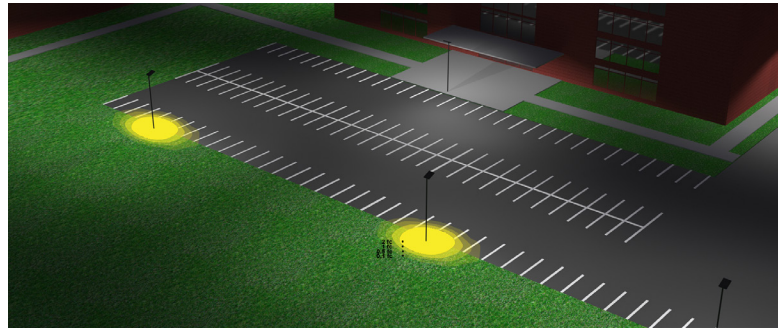

Area 30'x 45' Mounting Height: 20'


Other Views:



Side View



Front View

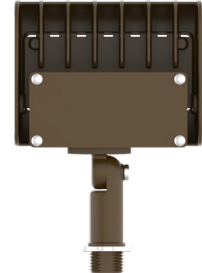

Back View

Performance Table: LFX-XS-15W-KN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LFX-XS-15W-30K-KN	15W	120~277V	1950	3000K	B1-U0-G0	130
LFX-XS-15W-40K-KN	15W	120~277V	1950	4000K	B1-U0-G0	130
LFX-XS-15W-50K-KN	15W	120~277V	1950	5000K	B1-U0-G0	130

Sample Ordering

Model	Size	Wattage	Color Temp.	Mount
LFX	XS	15W		KN

30K = 3000K
40K = 4000K
50K = 5000K

Accessories Options

Blank = No Option For Accessories

WRC-3-BRZ = Weatherproof cover with three(3) 1/2" hubs

Example:

- LFX-SM-15W-50K-KN (For LFX 15W 5000K fixture 120V-277V)
- LFX-SM-15W-50K-KN WRC-3-BRZ (For LFX 15W 5000K fixture 120V-277V)
(Weatherproof cover with three(3) 1/2" hubs)

ACCESSORIES AND MOUNTING OPTIONS



WRC-3-BRZ
Weatherproof cover with
Three
(3) 1/2" hubs



B-41



Mounts to landscape
post
or any 1/2" hub



Fully adjustable 1/2"
threaded knuckle for aiming
versatility

Color Options: Custom Color Available

Black Silver White Dark Bronze Green Red Yellow
Default color



Lighting Supplier Since 2003



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
info@warehouse-lighting.com