



# LMW SERIES Outdoor Lighting

LMW-12W-30K-WH  
LMW-12W-40K-WH  
LMW-12W-50K-WH

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_



Selection:



5 1/8"(H) x 5"(W) x 2 3/4"(L)

LED mini cutoff wall pack is ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas, residential areas, balcony, terrace, small shops.

## Features

- High Transparent Tempered Glass
- Die-Cast Aluminum With Powder Coat Finish
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 12W
- Power Factor: >0.9
- Efficacy: 125/ 130/ 135 LPW

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- High Transparent Tempered Glass
- Operating Temperature: -4°F to +104°F
- 7-Year Warranty
- IP 54, Suitable for Wet Locations

### Lighting:

- Chip: Lumileds Lexeon 3030 High Flux LED
- Total Lumens: 1300LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 110° X 100°
- Rated life: 70,000 Hrs

### Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas
- Residential area
- Balcony
- Terrace
- Small shops

### Other Models:


- 12W | 1300LM | LMW-12W-30K
- 12W | 1300LM | LMW-12W-40K
- 12W | 1300LM | LMW-12W-50K



## Photometrics: LMW-12W-WH



BUG Rating: B1-U2-G0

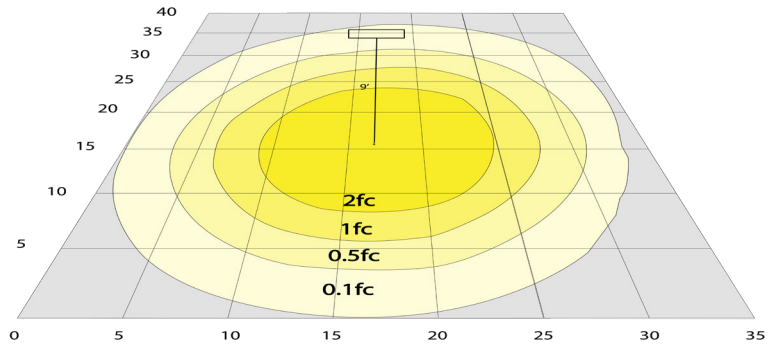

Area 40'x 35' Mounting Height: 9'

## Other Views:



Lens View



Side View



Front View



Back View

## Performance Table: LMW-12W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LMW-12W-30K-WH	12W	120~277V	1300LM	3000K	B1-U2-G0	108
LMW-12W-40K-WH	12W	120~277V	1300LM	4000K	B1-U2-G0	108
LMW-12W-50K-WH	12W	120~277V	1300LM	5000K	B1-U2-G0	108

## Sample Ordering

Model Wattage Color Temp. Housing Color

LMW - 12W -  -  WH

3000K  
4000K  
5000K

## Accessories:

Blank = No Option For Accessories

WMS-POST1-18 = 18" ONE SIDE OPTIONAL POST, BRONZE FINISH

WMS-POST2-18 = 18" TWO SIDE OPTIONAL POST, BRONZE FINISH

WMS-POST1-36 = 36" ONE SIDE OPTIONAL POST, BRONZE FINISH

WMS-POST2-36 = 36" TWO SIDE OPTIONAL POST, BRONZE FINISH

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-FM10D= EMERGENCY BACKUP EXTERNAL BATTERY, BACK BOX

OPT-SEN-LMW-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

OPT-PC-B1 = PHOTOCELL 120-277V

## ACCESSORIES:



WMS-POST1-18  
(CAN BE PAINTED)



WMS-POST2-18  
(CAN BE PAINTED)



WMS-POST1-36  
(CAN BE PAINTED)



WMS-POST2-36  
(CAN BE PAINTED)

## FACTORY-INSTALLED OPTIONS:



OPT-EM-FM10D-WH



OPT-SEN-LMW-3MRLV-5-WH



OPT-PC-B1

## Example:

1. LMW-12W-50K-WH

(FOR LMW 12W 5000K FIXTURE IN WHITE 120-277V)

2. LMW-12W-50K-WH  
WMS-POST1-18

(FOR LMW 12W 5000K FIXTURE IN WHITE 120-277V)  
(18" ONE SIDE OPTIONAL POST, BRONZE FINISH)

