

LED LOC-AJPL Multi Watt Multi CCT Panel



2x2

20W, 25W and 30W



2x4

30W, 35W and 40W

FEATURES

- Default Wattage is the highest wattage
 - 2x4 – 40W
 - 2x2 – 30W
- Default CCT: 5,000K
- IP20 rating – dry location
- Glare-free / flicker-free lighting
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

Steel and Aluminum frame. PMMA lens material to prevent panel from yellowing. The entire fixture functions as a heat sink to keep the LEDs cooler to prolong the life of the light.

OPTICAL SYSTEM:

Samsung 2835 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
 -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Fits standard T-bar and narrow grid drop ceilings.
 Surface mount kit, recessed kit or suspension mount.

CONTROLS & DIMMING:

0-10V dimming comes standard. Suitable for use with LED dimmers.




| MODEL NUMBER – 3,500K, 4,000K and 5,000K | SIZE | WATTAGE | LUMENS | EFFICACY | CRI | POWER FACTOR | THD | REPLACES |
|--|------|---------|---------|----------|------|--------------|-----|----------|
| LOC-22AJPL-MW(20/25/30)MCCT(35/40/50)D | 2x2 | 20W | 2,500LM | 125LM/W | 83.1 | 0.9 | 15% | 150W HID |
| LOC-22AJPL-MW(20/25/30)MCCT(35/40/50)D | 2x2 | 25W | 3,125LM | 125LM/W | 83.1 | 0.9 | 15% | 150W HID |
| LOC-22AJPL-MW(20/25/30)MCCT(35/40/50)D | 2x2 | 30W | 3,750LM | 125LM/W | 83.1 | 0.9 | 15% | 150W HID |
| LOC-24AJPL-MW(30/35/40)MCCT(35/40/50)D | 2x4 | 30W | 3,750LM | 125LM/W | 83.8 | 0.9 | 15% | 200W HID |
| LOC-24AJPL-MW(30/35/40)MCCT(35/40/50)D | 2x4 | 35W | 4,375LM | 125LM/W | 83.8 | 0.9 | 15% | 200W HID |
| LOC-24AJPL-MW(30/35/40)MCCT(35/40/50)D | 2x4 | 40W | 5,000LM | 125LM/W | 83.8 | 0.9 | 15% | 200W HID |


| Series | Size | 2x2 Wattage | 2x4 Wattage | Color Temperature |
|----------|----------------------|-------------------|-------------------|-------------------------|
| LOC-BLPL | 22 = 2x2 24 = 2x4 | 20W 25W 30W | 30W 35W 40W | 3500K 4000K 5000K |

MEASUREMENTS

2x2

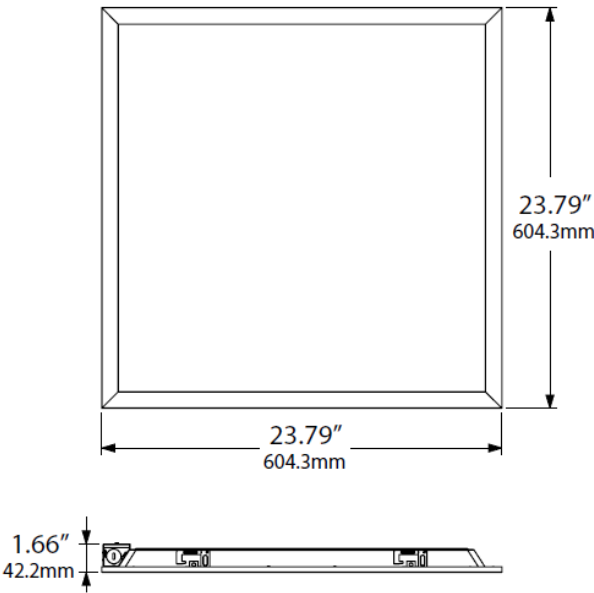



2x4

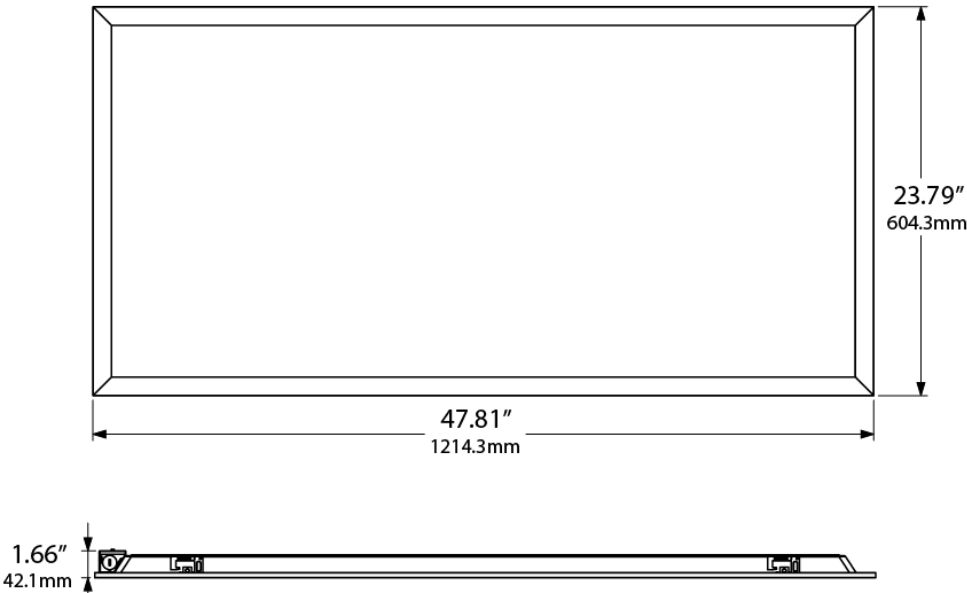



| MODEL | QUANTITY | WEIGHT | UPC CODE |
|--|----------|--------|----------------|
| LOC-22AJPL-MW(20/25/30)MCCT(35/40/50)D | 1 | lbs | 00810050941174 |
| LOC-24AJPL-MW(30/35/40)MCCT(35/40/50)D | 1 | lbs | 00810050941181 |



2x2

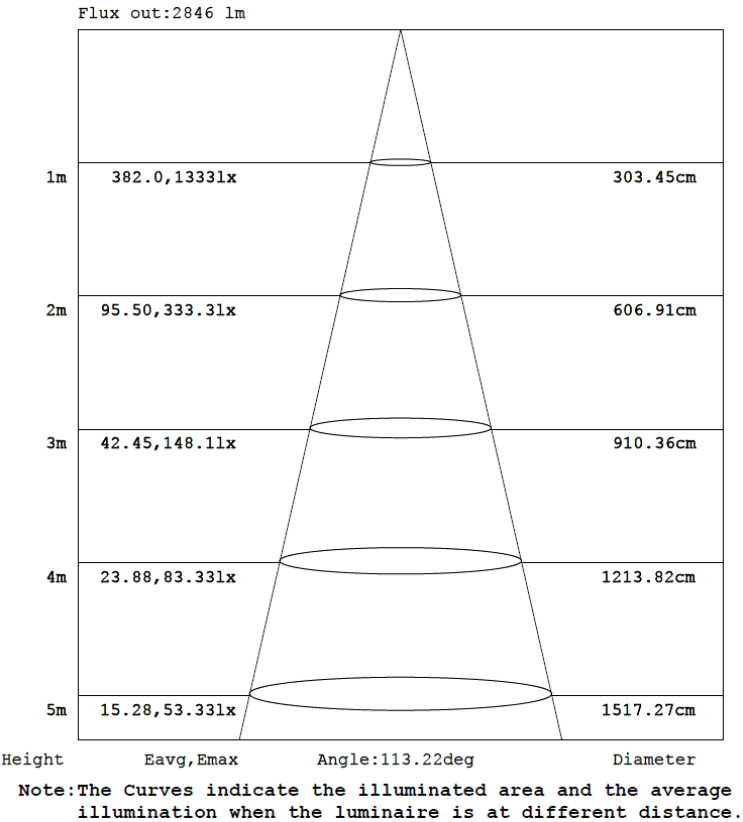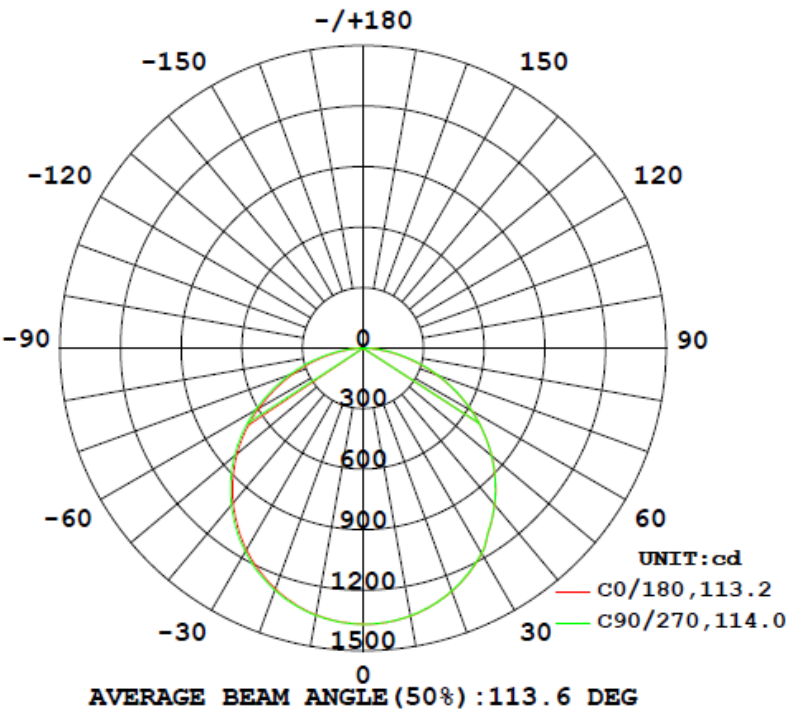


2x4

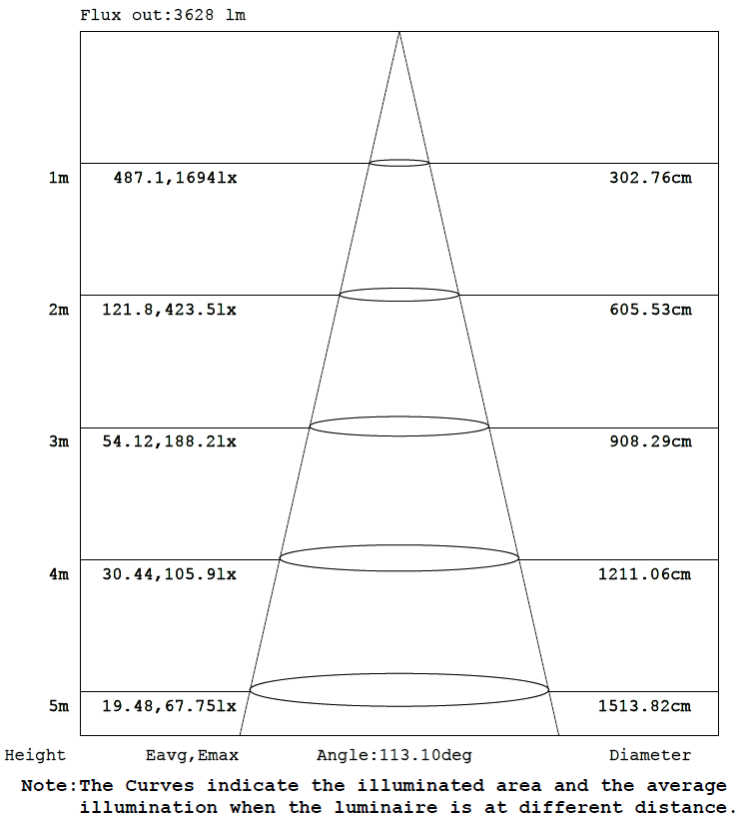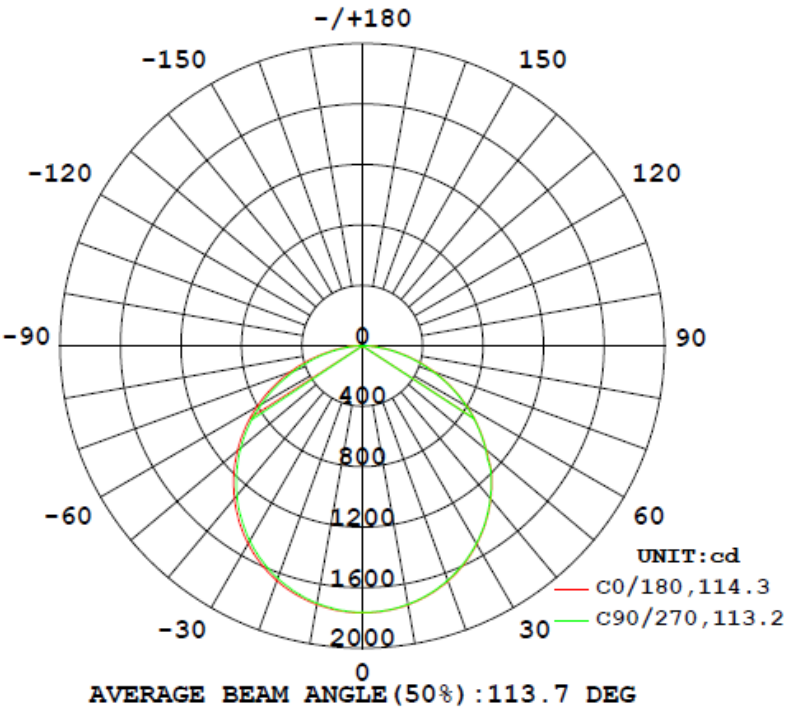

MOUNTING OPTIONS

Surface Mount

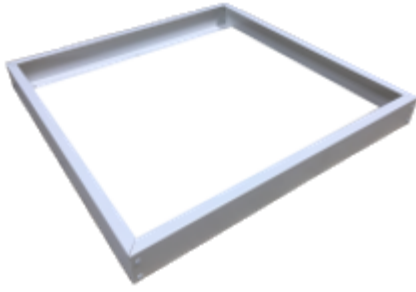

Recessed Mount




Hanging Kit



OPTIONAL ACCESSORIES



Emergency Driver

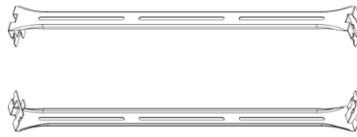

Mounting T-Bar Kit for
Emergency Driver