

LRD SERIES RESIDENTIAL LIGHTING

LRD-10W-27K-4WTRSL
LRD-10W-30K-4WTRSL
LRD-10W-35K-4WTRSL
LRD-10W-40K-4WTRSL
LRD-10W-50K-4WTRSL

4" LED ARCHITECTURAL WINGED SLOT RECESSED LIGHTS

Customer Name: _____

Project Name: _____


Note: _____

Type: _____



WHITE

BLACK

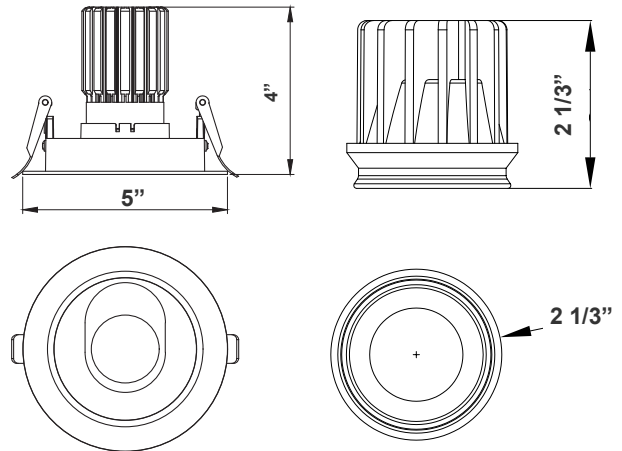

6 1/3"(H) X 5"(D)
Driver Box Dimensions:
5-1/4" x 1-5/8" x 1-1/8"

Ideal for New as well as old residential and commercial constructions.

Features

- 4" LED Slot Recessed Trim
- Die-Cast Aluminum With White Powder Coat Finish

- 5-Year Warranty
- Junction Box Included With Fixture

Technical Specifications

Electrical:

- Voltage: 120VAC
- Wattage: 10W
- Power factor: >0.90
- Efficacy: Up to 70 LM/W

Mechanical:

- Die-Cast Aluminum With White Powder Coat Finish
- Clear Glass Lens
- Junction Box Included With Fixture
- Type IC Rated: Approved For Direct Wontact With Insulation
- Operating Temperature: 104°F
- Air-Tight And Type IC Rated: No Housing Required
- Damp Location Approved
- 5-Year Warranty

Lighting:

- Dimming: Dimmable Down to 10% Using Standard TRIAC LED Dimmer
- Total Lumens: 700LM
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Color Rendering Index: >90
- Beam Angle: 30°
- Lifespan: 50,000 Hrs.

Applications:



- Ideal for New as well as old residential and commercial constructions.

Other Models:


- 7W | 490LM | LRD-10W-27K-4WTRSL-WH/BK
- 7W | 490LM | LRD-10W-30K-4WTRSL-WH/BK
- 7W | 490LM | LRD-10W-35K-4WTRSL-WH/BK
- 7W | 490LM | LRD-10W-40K-4WTRSL-WH/BK
- 7W | 490LM | LRD-10W-50K-4WTRSL-WH/BK



Photometrics: LRD-10W-4WTRSL

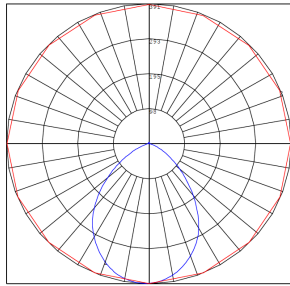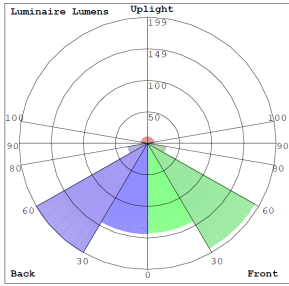

BUG Rating: B1-U2-G0

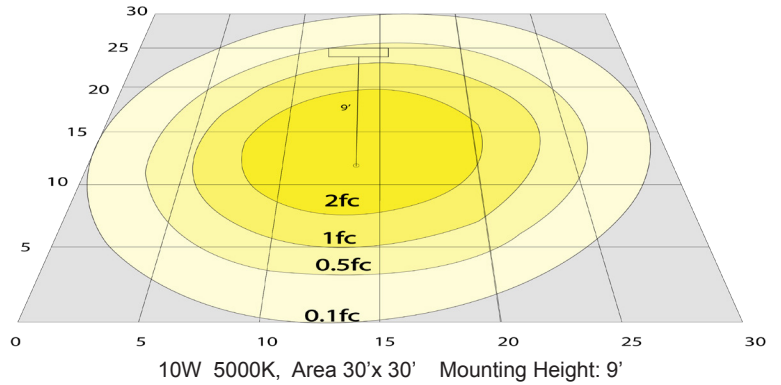

10W 5000K, Area 30'x 30' Mounting Height: 9'



Other Views:



LRD-WTR4SL-WH
 LRD-WTR4SL-WH
 LRD-WTR4SL-WH
 LRD-WTR4SL-WH
 LRD-WTR4SL-WH

LRD-EGN-10W-27K-D
 LRD-EGN-10W-30K-D
 LRD-EGN-10W-35K-D
 LRD-EGN-10W-40K-D
 LRD-EGN-10W-50K-D

LRD-10W-27K-4WTRSL-WH
 LRD-10W-30K-4WTRSL-WH
 LRD-10W-35K-4WTRSL-WH
 LRD-10W-40K-4WTRSL-WH
 LRD-10W-50K-4WTRSL-WH

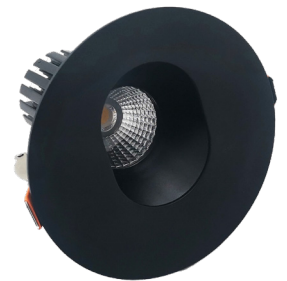

LRD-WTR4SL-BK
 LRD-WTR4SL-BK
 LRD-WTR4SL-BK
 LRD-WTR4SL-BK
 LRD-WTR4SL-BK

LRD-EGN-10W-27K-D
 LRD-EGN-10W-30K-D
 LRD-EGN-10W-35K-D
 LRD-EGN-10W-40K-D
 LRD-EGN-10W-50K-D

LRD-10W-27K-4WTRSL-BK
 LRD-10W-30K-4WTRSL-BK
 LRD-10W-35K-4WTRSL-BK
 LRD-10W-40K-4WTRSL-BK
 LRD-10W-50K-4WTRSL-BK

Performance Table: LRD-7W-4WTRSL


| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|--------------------|---------|---------|--------|-------------|------------|-----|
| LRD-10W-27K-4WTRSL | 10W | 120V | 700LM | 2700K | B1-U2-G0 | 70 |
| LRD-10W-30K-4WTRSL | | | | 3000K | | |
| LRD-10W-35K-4WTRSL | | | | 3500K | | |
| LRD-10W-40K-4WTRSL | | | | 4000K | | |
| LRD-10W-50K-4WTRSL | | | | 5000K | | |



Accessory:

Blank = No Option For Accessories
LRD-FGL = LRD SERES FROSTED GUASS LENS

Accessory:



LRD-FGL

Sample Ordering

| Model | Wattage | Color Temp. | Size | Size |
|-------|---------|---|--------|--------------------------|
| LRD | 10W | <input type="text"/> | 4WTRSL | <input type="text"/> |
| | | 27K = 2700K 30K = 3000K 35K = 3500K 40K = 4000K 50K = 5000K | | WH = WHITE BK = BLACK |

