LRS SERIES Outdoor Lighting

LRS-M2-MCT-P-ORB

10" RESIDENTIAL LANTERNS WITH PHOTOCELL, CCT SELECTABLE Market Selectable Market Selectable)



LED Outdoor Wall Lantern with aluminum housing & powdercoated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

7 2/5"(W) x 11 3/5"(H) x 7 2/5"(D)

Features

- Aluminum Housing and Steel Plate
- 10" Model M Residential Lanters
- Powder-Coated Finish

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Wattage: 12W
- Power Factor: >0.90
- Efficacy: 41 LPW

Mechanical:

- Oil-Rubbed Bronze Finish
- DC Button Photocell on top of the Mounting Plate
- With Frosted Lens & Ornament Guard
- Operating Temperature: -4°F to 104°F
- 7-Year Warranty
- IP42, Suitable For Wet Location

Lighting:

• Total Lumens: 500LM

7-Year Warranty

Customer Name: Project Name:

6 1/2"

11 3/5"

Note:

å

Color Temperatures: 3000K/4000K/5000K

Multi CCT Switch is Inside Fixture

- Color Rendering Index: $CRI \ge 80$
- Beam Angle: 90° x 110°
- Rated Life: 70,000 Hrs

Applications:

 LED Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

- **Other Models:**
- 12W | 500LM | LRS-M1-MCT-P-ORB







7 2/5" 。


0

5"

Type:

ĥ

4 3/5"

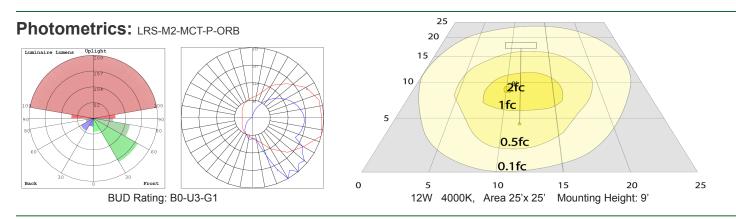


Other Views:



Performance Table: LRS-M2-MCT-P-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRS-M2-MCT-P-ORB	12W	120V	500LM	3000K 4000K 5000K	B0-U3-G1	41

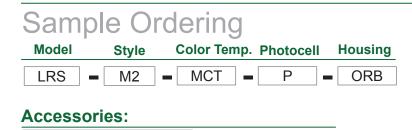

Blank = No Option For Accessories

LRS-M-RL-FG = Replacement Default Frosted Lens For LRS-M Series

LRS-M-RL-BG = Replacement Bubble Glass Lens For LRS-M Series LRS-M-RL-CG = Replacement Crackled Glass Lens For LRS-M Series

ACCESSORIES:



LRS-M-RL-FG





LRS-M-RL-BG



LRS-M-RL-CG

WESTGATE

