LRX SERIES Outdoor Lighting

LRX-50-120W-MCTP

POWER & CCT BARN/AREA LIGHT






LED Dusk to Dawn Light with Photocell ideal for general site lighting, yard/barn lighting, loading docks, doorway, pathway and parking areas.




Customer Name:

Project Name:

Note: Type:





11"(W) x 18 1/3"(H) x 8" (D)

-eatures

- Back plate: Die-cast aluminum
- Polycarbonate Lens

- 7-Year Warranty
- Multi CCT, Switch is on bottom of Fixture

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz

Wattage: 50W /80W/ 100W/ 120W

Power Factor: >0.90 Efficacy: 130 LPW

THD: <20%

Mechanical:

- Die-Cast ADC12 Aluminum Alloy, Outdoor Powder Coated
- Lens: High light Transmittance PC, Anti-UV and Fire Resistant
- 1-1/4" EMT Elbow & Mounting Strap Included
- NEMA Twist-Lock Photocell Included
- Aluminum LED board: High Conductive, Waterproof, Aging Resistance, Salt Resistance
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty

Other Models:

IP44

Lighting:

Dimming: 0-10V Dimming Total Lumens: 15600LM

Multi CCT, Switch is on bottom of Fixture

Color Temperatures: 3000K/ 4000K/ 5000K/ 5700K

Color Rendering Index: CRI ≥ 70

Beam Angle: 90° x 110° Rated life: 70,000 Hrs

Applications:

LED Dusk to Dawn Light with Photocell ideal for general site lighting, yard/barn lighting, loading docks, doorway, pathway and parking areas.



• 50W | 6800LM | LRX-20-50W-MCTP


















Photometrics: LRX-50-120W-MCTP





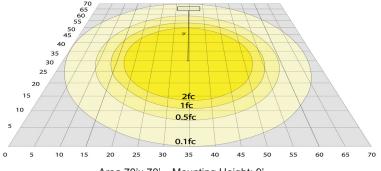

BUG Rating: B3-U3-G3

Area 70'x 70' Mounting Height: 9'

Other Views:







Front View



Back View

Performance Table: LRX-50-120W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LRX-50-120W-MCTP	50W	120-277V	7800LM	3000K 4000K 5000K 5700K	B3-U3-G3	130
			8000LM			
			8320LM			
			8320LM			
	80W		11400LM			
			11800LM			
			12100LM			
			12100LM			
	100W		13800LM			
			14050LM			
			14500LM			
			14500LM			
	120W		16000LM			
			16500LM			
			17000LM			
			17000LM			

Sample Ordering

Model Min. Watt Max. Watt Color Temp.

LRX = 50 = 120W = MCTP

ACCESSORIES:



90° EMT Arm and Wall Bracket (Mounting Strap) included

Arm Diameter: 1-1/4" EMT Elbow

Example:

1. LRX-50-120W-MCTP

(FOR 120W MAX MCTP FIXTURE 120-277V)

