# LSL SERIES

Commercial Lighting



LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

## eatures

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount
- The Sensor Can Be Overridden (Disconnected)

## Technical Specifications

## **Electrical:**

- Voltage: 120-277VAC 60Hz
- Wattage: 20W
- Power Factor: >0.99
- Efficacy: 105 LPW

## Mechanical:

- Whit Finish
- Bi-Level Microwave Motion Sensor Inside the Fixture Under The Lens.
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Translucent Lens Caps Illuminate With The Light.
- Integrated Lens & LED Module for Easy Installation & Maintenance.
- Ceiling Mount or Suspended Mount
- Junction Box Cover Kit Included, It Sits on Any 3" or 4" **Round Junction Boxes**
- Operating Temperature: -4°F -122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP44 Suitable For Damp Location
- 5-Year Warranty

## **Sensor Spec:**

- Detection Range: 17Ft. / 360°
- Mounting Height: 25Ft. Max.
- DIP Settings switch on The Sensor
- **Optional Remote Control (WEC-3RC)**

## Other Models:

20W | 2100LM | LSL-2FT-20W-MCT-D-SEN





#### Phone: (877) 805-2252 | Fax: (877) 805-2252 www.westgatemfg.com |





#### Customer Name:





- Linkable (Optional Alignment Bracket Available)
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

## **Emergency Battery Backup Spec:**

- Output Power: 9W
- Output Voltage: 48V
- Li-Ion Battery: >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture


## Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2100LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared • to a Fluorescent Fixture
- Rated life: 50,000 Hrs

## **Applications:**

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime



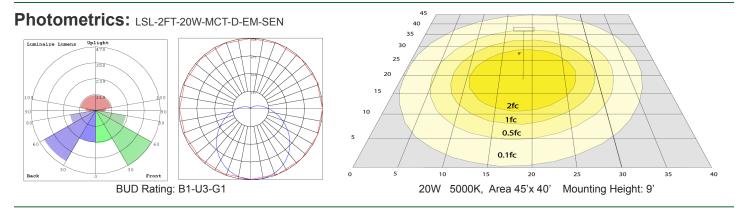

## **Other Views:**

Front View Side View		Back View		

### Performance Table: LSL-2FT-20W-MCT-D-EM-SEN

		-					
MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW	
LSL-2FT-20W-MCT-D-EM-SEN	20W	120~277V	2100LM	3500K 4000K 5000K	B1-U3-G1	105	
Sample Orderin	ACCESSORIES:						
-							
Model Size Wattage Color Temp. DimmingEmergency Sensor							
LSL = 2FT = 20W = MCT = D = EM = SEN							
	2 5 2 5 1 5						
Accessories:				SCL-GSY110 SCL-GSY120 SCL-TBC-WN			
Blank = No Option For Accessories LSL-CB = LSN SERIES ALIGNMENT BRACKET				ALIGNMENT (COUPLING) BRACKET			
							SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2
T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10F							
LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR &							SCL-CSY
LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP							
GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FO SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSIO							
GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FO LSL-2FT-WG = WIRE GUARD KIT FOR 2FT. STRIP LIC							
LSL-21 T-WG - WIRE GOARD RTT OR 211. STRIP EIGHT							
Eastery Installed Option	SCL-GSY10 SCL-GSY20						
Factory-Installed Options:							
Blank = No Option For Accessories OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8F	LSL-2FT-WG						
OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG							
				FACTORY-INSTALLED OPTIONS:			
				OPT-HBC-125SB-WH OF	PT-HBC-125TL-WH OPT-H	HBC-277TL-WH	

# **WESTGATE**

