
LSN SERIES Commercial Lighting


LSN-2FT-20W-MCT-D




Selection:



Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below



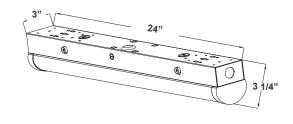

24"(L) x 3"(W) x 3 1/4"(H)

Features

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount

- Linkable (Optional Alignment Bracket Available)
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120-277VAC 60Hz

Wattage: 20WPower Factor: >0.99Efficacy: 130 LPW

Mechanical:

- Whit Finish
- Lens: Polycarbonate Frosted Lens, Shatter ResistantTranslucent Lens Caps Illuminate With The Light.
- Integrated Lens & LED Module for Easy Installation & Ceiling Mount or Suspended Mount
- Junction Box Cover Kit Included, It Sits on Any 3" or 4" Round Junction Boxes
- Operating Temperature: -4°F -122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime











Photometrics: LSN-2FT-20W-MCT-D

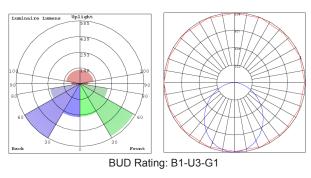

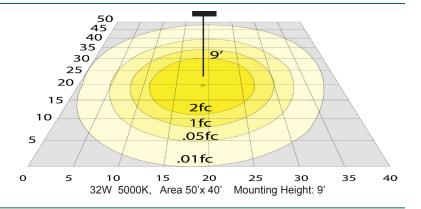

Other Views:







Performance Table: LSN-2FT-20W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSN-2FT-20W-MCT-D	20W	120~277V	2600LM	3500K 4000K 5000K	B1-U3-G1	130

Sample Ordering

Model Size Wattage Color Temp. Dimming

LSN = 2FT = 20W = MCT = D

Accessories:

Blank = No Option For Accessories

LSN-CB = LSN SERIES ALIGNMENT BRACKET

SCL-TBC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2 T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE STRAPS - 70 LBS. MAX LOAD

SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)

SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET)

SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)

SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.)

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-CM1INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-SEN-2MDR-36= PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V

OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG

WEC-3RC = OPTIONAL REMOTE

ACCESSORIES:





SCL-GSY110 SCL-GSY120

SCL-TBC-WN

ALIGNMENT (COUPLING)
BRACKET





SCL-GSY10 S

SCL-GSY20

SCL-CSY

FACTORY-INSTALLED OPTIONS:







OPT-HBC-125SB-WH

OPT-HBC-125TL-WH

OPT-HBC-277TL-WH

+

SENSOR SPTION



OPT-EM-CM1INT

OPT-SEN-2MDR-36

WEC-3RC

Example:

1. LSN-2FT-20W-MCT-D

(FOR LSN 20W MCT FIXTURE 120-277V)

2. LSN-2FT-20W-MCT-D LSN-CB (FOR LSN 20W MCT FIXTURE 120-277V) (LSN SERIES ALIGNMENT BRACKET)





