

- Features
- High Lumen Efficiency

factory-installed options below

Ceiling Mount or Suspended Mount

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 55W/ 65W/ 75W/ 90W
- Power Factor: >0.99
- Efficacy: 135 LPW

Mechanical:

- Black Finish
- High Lumen Efficiency Lumen
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Ceiling Mount or Suspended Mount
- Operating Temperature: -4°F to 122°F
- Housing: Cold-rolled Steel
- IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

Dimmable: 0~10V Dimming

Switch Inside Fixture)

- Total Lumens: 11745LM Max.
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable 4Power switch inside fixture)

Linkable (Optional Alignment Bracket Available)

MCT: Multi Color Temperature (Selectable 4Power

- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime


Other Models:

• 90W | 11745LM | LSS-8FT-90W-MCTP







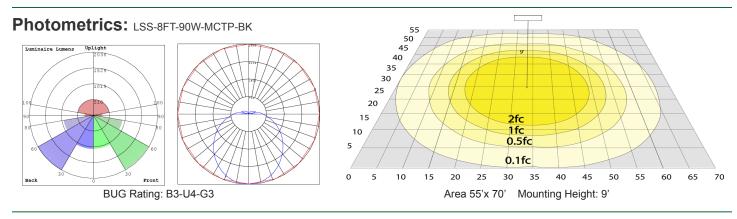

Other Views:

							: 11980	
Side View		Front View				Back View		
Performance Table: LSS-8FT-90W-MCTP-BK								
MODEL NO.	Wattage	Voltage	L	umens	Color Temp.	BUG Rating	LPW	
LSS-8FT-90W-MCTP-BK	55W 65W 75W 90W	120~277V	7425LM 8775LM 10125LM 11745LM		3500K 4000K 5000K	B3-U4-G3	135	
Sample Ordering				ACCESSORIES:				
Model Size Wattage Color Temp. Housing								
LSS = 8FT = 90W = MCTP = BK								
Accessories:				ALIGNMENT (COUPLING)				
Blank = No Option For Accessories LSS-CB2 = ALIGNMENT BRACKET SCL-TEC-WN = T-BAR CLIP WITH SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY110 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) SCL-CSY1-6FT= ADJ. 6FT 1/16in SINGLE SUSPENSION Sin CANOPY SET WITH Y DOUBLE KEY-HOLE END CONNECTORS, NONPOWER SIDE SCL-CSY11-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION Sin CANOPY SET WITH Y DOUBLE KEY-HOLE END CONNECTORS, NONPOWER SIDE				SCL-GSY110 SCL-GSY120 SCL-TBC-WN BRACKET (Can be painted)				
Factory-Installed Options: Blank = No Option For Accessories OPT-EM-CM2INT= INTERNAL EMERGENCY BACKUP BATTERY OPT-SEN-2US = ULTRASONIC BI-LEVEL DIMMING (REMOTE NOT NEEDED) OPT-HBC-125TL-BK = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V OPT-HBC-277TL-BK = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V OPT-HBC-25SB-BK = STRAIGHT BLADE PLUG 10FT, 15A, 125V, 3-CONDUCTOR 18AWG WEC-3RC = OPTIONAL REMOTE OPT-FWH-63 = 6FT 3-WIRE WHIP OPT-FWH-65 = 6FT 5-WIRE WHIP				OPT-HBC-125SB		WEC-3RC R	-277TL-WH OPT-FWH-63 OPT-FWH-65	

WESTGATE

