


# LW360 SERIES Outdoor Lighting

LW360-120W-30K-G2  
LW360-120W-40K-G2  
LW360-120W-50K-G2  
LED 360° ROTATABLE WALL PACK

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ Type: \_\_\_\_\_



Selection:

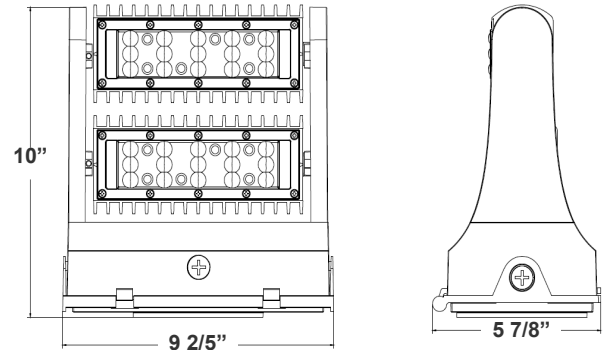

10"(H) x 9 2/5"(W) x 5 7/8"(L)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

## Features

- Rotatable Heads (Both in 60W & 80W) With Set Screw
- Three 1/2" Threaded Knockouts: 1 Bottom. 1 On Each Side
- TIR Optic Lens - TYPE II
- Die-cast aluminum housing with powder coat finish (Dark Bronze or White)
- 7-Year Warranty

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 120W
- Power Factor: >0.95
- Efficacy: 130 LPW

### Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- TIR Optic Lens - TYPE II
- Includes Mounting Hardware
- Operating Temperature: -40°F -104°F
- Five 1/2" Threaded Knockouts: 1 on Each Side, 1 on The Back
- 7-Year Warranty
- IP65, Suitable for Wet Locations
- Light Head rotates 350°

### Lighting:

- Chip: Lumileds LEDs
- TIR Optic Lens - TYPE II
- Dimmable: 0~10V Dimming
- Total Lumens: 15600LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Rated life: 70,000 Hrs

### Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

### Other Models:


- |                                   |                                   |                                   |                                    |
|-----------------------------------|-----------------------------------|-----------------------------------|------------------------------------|
| • 25W   3250LM   LW360-25W-30K-G2 | • 40W   5200LM   LW360-40W-30K-G2 | • 60W   7800LM   LW360-60W-30K-G2 | • 80W   10400LM   LW360-80W-30K-G2 |
| • 25W   3250LM   LW360-25W-40K-G2 | • 40W   5200LM   LW360-40W-40K-G2 | • 60W   7800LM   LW360-60W-40K-G2 | • 80W   10400LM   LW360-80W-40K-G2 |
| • 25W   3250LM   LW360-25W-50K-G2 | • 40W   5200LM   LW360-40W-50K-G2 | • 60W   7800LM   LW360-60W-50K-G2 | • 80W   10400LM   LW360-80W-50K-G2 |



## Photometrics: LW360-120W



BUG Rating: B4-U3-G1

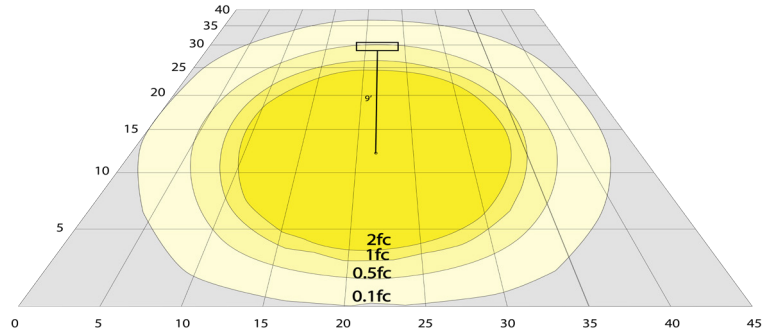

Area 40' x 45' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LW360-120W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LW360-120W-30K-G2	120W	120~277V	15600LM	3000K	B4-U3-G1	130
LW360-120W-40K-G2	120W	120~277V	15600LM	4000K	B4-U3-G1	130
LW360-120W-50K-G2	120W	120~277V	15600LM	5000K	B4-U3-G1	130

## Sample Ordering

Model	Wattage	Color Temp.	Series
LW360	120W	3000K 4000K 5000K	G2

## Accessory:

Blank = No Option For Accessories

LW360-SH1= SHROUD FOR LW360 SERIES, BRONZE FINISH

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LW360-LG= EMERGENCY BACKUP BATTERY, BACK BOX


OPT-SEN-LW360-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-CLR-95= COLOR PAINT

OPT-LW360-PC-B = PHOTOCELL 120-277V

WEC-8RC = OPTIONAL REMOTE

## ACCESSORY:



LW360-SH1  
SHOWN WITH EM BOX

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LW360-LG  
SHOWN WITH MOTION SENSOR



WEC-8RC



OPT-LW360-PC-B



OPT-SEN-LW360-3MRLV-5

## Example:

1. LW360-120W-30K-G2

(FOR LW360 120W 3000K FIXTURE 120-277V)

2. LW360-120W-30K-G2  
LW360-SH1

(FOR LW360 120W 3000K FIXTURE 120-277V)  
(SHROUD FOR LW360 SERIES, BRONZE FINISH)

3. LW360-120W-30K-G2  
LW360-SH1  
OPT-EM-LW360-LG

(FOR LW360 120W 3000K FIXTURE 120-277V)  
(SHROUD FOR LW360 SERIES, BRONZE FINISH)  
(EMERGENCY BACKUP BATTERY, BACK BOX)

