

LW360 SERIES Outdoor Lighting

LW360-60W-MCT-WH-G2



WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

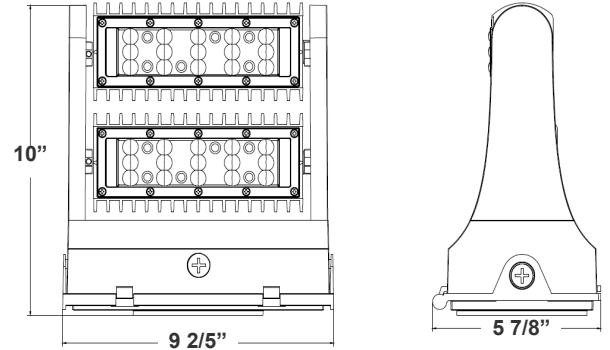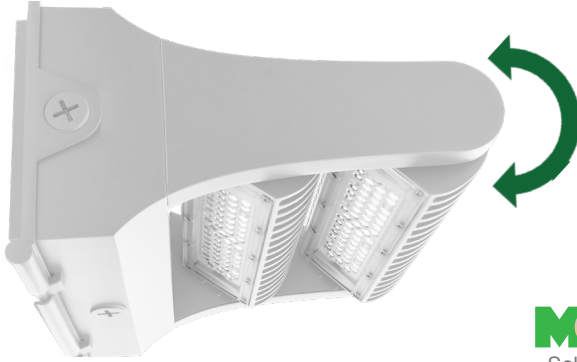

10"(H) x 9 2/5"(W) x 5 7/8"(L)

Ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Three 1/2" Threaded Knockouts: 1 Bottom. 1 On Each Side
- Light Head rotates 350°
- Die-Cast Aluminum Housing With Powder Coat Finish
- MCT: Switch located inside the fixture
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 60W
- Power Factor: >0.95
- Efficacy: 130 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish
- Light Head rotates 350°
- Includes Mounting Hardware
- Operating Temperature: -40°F -104°F
- Five 1/2" Threaded Knockouts: 1 on Each Side, 1 on The Back
- 7-Year Warranty
- IP65, Suitable for Wet Locations

Lighting:

- Chip: Lumileds LEDs
- TIR Optic Lens - TYPE II
- Dimmable: 0~10V Dimming
- Total Lumens: 7800LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°
- Rated life: 70,000 Hrs

Applications:

- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

Other Models:

- 25W | 3250LM | LW360-25W-MCT-WH-G2





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z9-Z9-Z2Z

Photometrics: LW360-60W-MCT-WH-G2



BUG Rating: B3-U3-G1

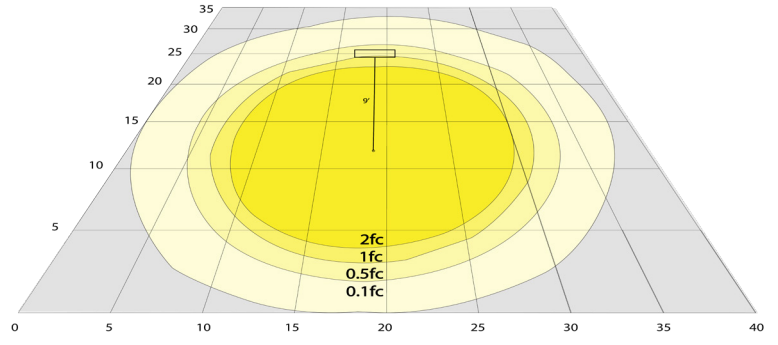


60W 5000K, Area 35'x 40' Mounting Height: 9'


Other Views:



Side View



Front View



Back View

Performance Table: LW360-60W-MCT-WH-G2

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LW360-60W-MCT-WH-G2	60W	120~277V	7800LM	3000K 4000K 5000K	B3-U3-G1	130

Sample Ordering

Model	Wattage	Color Temp.	Housing	Series				
LW360	-	60W	-	MCT	-	WH	-	G2

Accessory:

Blank = No Option For Accessories
LW360-SH1= SHROUD FOR LW360 SERIES, BRONZE FINISH (CAN BE PAINTED IN WHITE)

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-LW360= EMERGENCY BACKUP BATTERY, BACK BOX
OPT-SEN-LW360-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL
OPT-CLR-85= COLOR PAINT
OPT-LW360-PC-B = PHOTOCELL 120-277V
WEC-8RC= OPTIONAL REMOTE

ACCESSORY:



LW360-SH1-WH

FACTORY-INSTALLED OPTIONS:



OPT-EM-LW360-LG



WEC-8RC



OPT-LW360-PC-B



OPT-SEN-LW360-3MRLV-5

Example:

- LW360-60W-MCT-WH-G2
- LW360-60W-MCT-WH-G2
LW360-SH1
- LW360-60W-MCT-WH-G2
LW360-SH1
OPT-EM-LW360

(FOR LW360 60W MCT FIXTURE 120-277V)

(FOR LW360 60W MCT FIXTURE 120-277V)
(SHROUD FOR LW360 SERIES, BRONZE FINISH)

(FOR LW360 60W MCT FIXTURE 120-277V)
(SHROUD FOR LW360 SERIES, BRONZE FINISH)
(EMERGENCY BACKUP BATTERY, BACK BOX)

