

A37

LDSW
MCT5




TECHNICAL SPECIFICATIONS:

- :: Multi CCT (Selectable Switch on the LED Board)
- :: Aluminum Housing and Steel Back Plate
- :: Lens: Acrylic PC lens
- :: Beam Angle: 120°
- :: Voltage: 120V AC 50/60Hz
- :: Color Rendering Index: ≥ 80
- :: Power Factor: 90%
- :: Operating Temp: -50°F~113°F
- :: 70,000 hour rated life
- :: IP42, Suitable for outdoor use
- :: 7-year warranty

APPLICATIONS:

:: LED outdoor wall light with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.

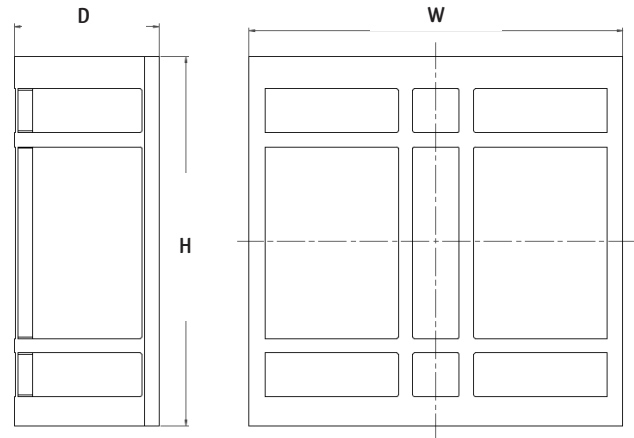

OUTDOOR SCONCE LIGHT

CATALOG	WATTS	LPW	COLOR TEMP	HOUSING	DIMENSIONS
LDSW-MCT5-ORB	12W	100LM/W	2700K/3000K/3500K/4000K/5000K	Oil-Rubbed Bronze	10"(H) x 10"(W) x 4"(D)
LDSW-MCT5-SIL	12W	100LM/W	2700K/3000K/3500K/4000K/5000K	Silver	10"(H) x 10"(W) x 4"(D)