

PF81Q

L70
25°C


362,000 Hours

EasyLED Reveal Enclosed Large Round Post Top



Dimensions

Diameter (D)	26 3/4" (679mm)
Height (A)	19 1/8" (505mm)

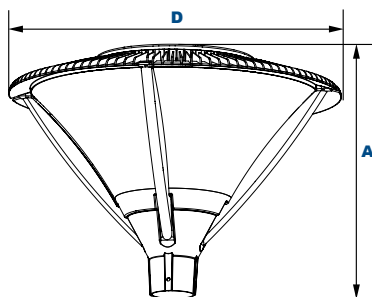

EasyLED Technology

The LEPG PF81Q Reveal Architectural Enclosed Large Round Post Top is available in a Type V distribution designed to replace HID lighting systems up to 1000w MH or HPS. The fixture mounts to a pole top tenon. Typical area lighting applications include parking areas, walkways, and street lighting applications. Mounting heights of 12 to 30 feet can be used based on light level and uniformity requirements

Specifications and Features:

Housing:

Die Cast Aluminum Housing, Integral Heat Sinking. Photocell Adaptable.

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

Finish:

Black Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Clear Polycarbonate Array Lens to Seal LED Array. Prismatic Clear Polycarbonate Vandal-Resistant Outer Conical Lens.

Mounting Options:

Accommodates "P3" 2 1/8" O.D. x 3" Tenons

EasyLED LED:

Aluminum Boards

Wattage:

Array: 176w, System: 190.2w; (400-1000w HID Equivalent)

Driver:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

Controls:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with LEPG Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

Warranty:

5-Year Warranty for -40°C to +50°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

Order Information Example:

PF81QF1X176U5KC BSP

PF81Q	F	1X176			C		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
PF81Q= EasyLED Reveal Enclosed Large Round Post Top	F=Type V	1X176=176w	U=120-277V H=347-480V	3K=3000K 4K=4000K 5K=5000K	C=Clear Polycarbonate Outer Conical Lens	B=Black C=Custom (Consult Factory)	SF=Single Fuse DF=Double Fuse SP=Surge Protection S2=Microwave Sensor with Dimming for Mounting Heights of 8 to 40' R3=3-Pin Twist Lock Photocell Receptacle R7=7-Pin ANSI C136.41—2013 Twist Lock Photocell Receptacle

Project Information:

Project Name: _____ Fixture Type: _____

Complete Catalog #: _____ Date: _____

Comments: _____

Certification & Listings:



Specifications subject to change without notice. Rev. 082218

Phone: 888-454-4480
info@warehouse-lighting.com

PF81Q

L70
25°C**362,000 Hours**

EasyLED Reveal Enclosed Large Round Post Top

Accessories & Replacement Parts:



Accessories (Order Separately, Field Installed)


P18131	Twist Lock Non-Shorting (Open) Cap Disconnects Service to Fixture for Temporary or Permanent Disabling (Fixture Always Off). IP65, 480V Maximum.
P18132	Twist Lock Shorting Cap Provides Fixed Service to Fixture (Fixture Always on). IP65, Rated Load 7200w Tungsten.
P18140	110-120VAC Instant Twist Lock Photocell
P18142	105-287VAC Instant Twist Lock Photocell
P18150	120VAC Time Delay Twist Lock Photocell
P18152	277VAC Time Delay Twist Lock Photocell
P18156	120-277VAC Universal Twist Lock Photocell

Replacement Parts (Order Separately, Field Installed)

PF80PC	Clear Polycarbonate Outer Conical Lens.
P17117	Internal Microwave Sensor with Dimming for Mounting Heights of 8 to 40'. 120-277VAC, 50/60Hz

Sensors Not available for 480V.

Photometric Data

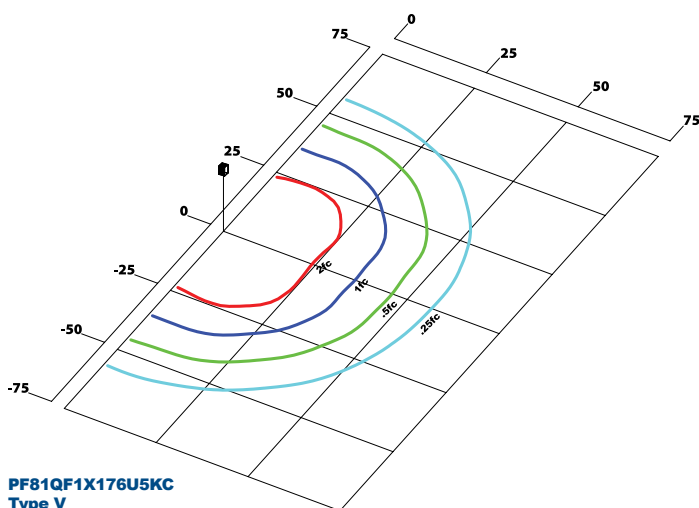

PF81QF1X176U5KC
Type V
Grid in MH
MH=25 Feet

EPA (Effective Projected Area)

EPA (Sq. Ft.)	Weight (Lbs.)
3.20	32 Lbs

Photometric Performance

				5000 CCT 80 CRI					4000 CCT 80 CRI				
LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 176w	525	190	Type V Clear	16,405	86	3	2	2	16,101	85	3	2	2

Projected Lumen Maintenance

Data shown for 5000 CCT				Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C	
L70 Lumen Maintenance @ 25°C / 77°F	190	1.00	0.98	0.96	0.92	362,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C	
L70 Lumen Maintenance @ 50°C / 122°F	190	1.00	0.96	0.92	0.84	183,000	
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C	
L80 Lumen Maintenance @ 40°C / 104°F	190	1.00	0.97	0.94	0.88	167,000	

NOTES:

- Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
- Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

Specifications subject to change without notice. Rev. 082718

Phone: 888-454-4480
info@warehouse-lighting.com