


JOB NAME: _____


DATE: _____

TYPE: _____

DIMENSIONS:

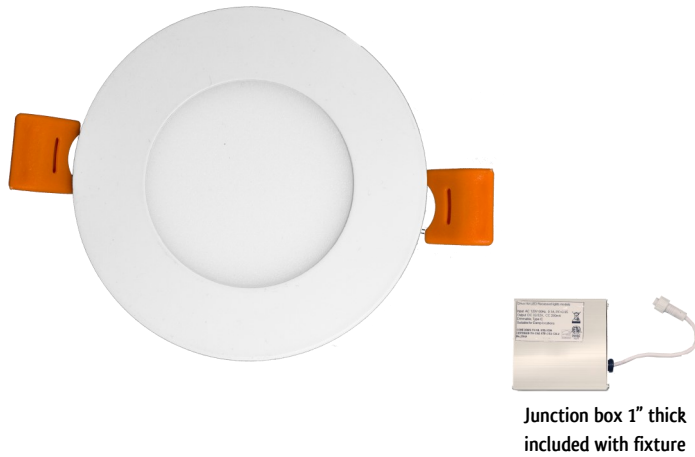

Junction box 1" thick included with fixture

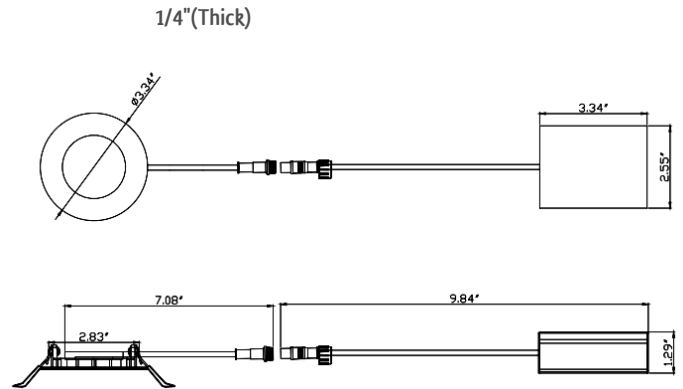

RSL3-MCT5

3" LED CCT5 ULTRA SLIM RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 6W
- Power factor: >0.90
- Efficacy: 66LM/W,70LM/W

HOUSING SPECIFICATIONS:

- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

CERTIFICATIONS: ETL,ES



WARRANTY: 5 years

OPTIONAL ACCESSORIES:



RSL-EXT-10FT-MCT



RSL3-RI

MODEL	DESCRIPTION
RSL-EXT-10FT	10 Ft. Extension Cable For use with all MCT Slim Light
RSL3-RI	3" Round Rough-in Plate,26" long

LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 400LM/420LM
- Color temperature:
MCT: 2700K/3000K/3500K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100°-110°



JOB NAME: _____

DATE: _____

TYPE: _____

RSL3-MCT5

3" LED 5CCT ULTRA SLIM RECESSED LIGHTS

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL3-MCT5	6W	120VAC	400LM	MCT: 27K/30K/35K/40K/50K

BRAND OF DIMMERS:

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Lutron	TGCL-153PH-LA
8	Lutron	LSLV603PWV
9	Leviton	6674-POW
10	Lutron	DVCL-153P
11	Lutron	MSCL-OP153P
12	Lutron	CTCL-153P
13	Lutron	MACL-153M
14	Pass & Seymour	HCL453PTCCCV6
15	Pass & Seymour	LSLV603PWV

