




Junction box 1" thick included with fixtures

**DIMENSIONS:**

4" Diameter

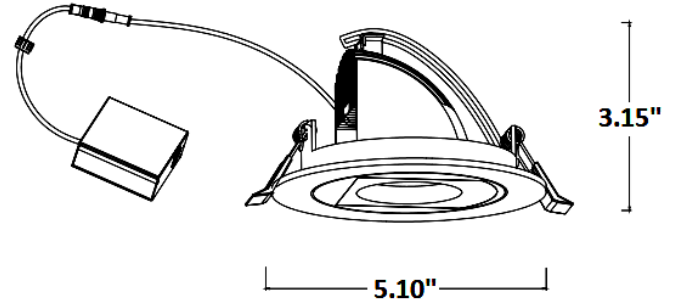

**RSL4-APD-MCT5**

**LED ADJUSTABLE PULL-DOWN ULTRA SLIM RECESSED LIGHTS**

Ideal for New as well as old residential and commercial constructions.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120VAC
- Wattage: 10W
- Power factor: >0.90
- Efficacy: 70LM/W

**HOUSING SPECIFICATIONS:**

- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

**CERTIFICATIONS: ETL,ES**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL4-APD-MCT5	10W	120VAC	700LM	MCT

**LIGHTING SPECIFICATIONS:**

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 700LM
- Color temperature:  
MCT: 2700K/3000K/3500K /4000K/5000K
- Color rendering index: >80
- Beam Angle: 45°
- Adjustability of Rotation: 358°

**WARRANTY: 5 years**



## RSL4-APD-MCT5

LED ADJUSTABLE PULL-DOWN ULTRA SLIM  
RECESSED LIGHTS

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
RSL4-APD-MCT5	10W	120VAC	700LM	MCT

### BRAND OF DIMMERS:

NO.	BRAND	MODEL
1	Leviton	6631-1LT
2	Lutron	MACL-153MLH-AL
3	Lutron	TGCL-153PH-LA
4	Lutron	DVW-603PGH-WH
5	Lutron	CT-600PR-WH
6	Lutron	LGCL-153PHL-IV
7	Lutron	TGCL-153PH-LA
8	Lutron	LSLV603PWV
9	Leviton	6674-POW
10	Lutron	DVCL-153P
11	Lutron	MSCL-OP153P
12	Lutron	CTCL-153P
13	Lutron	MACL-153M
14	Pass & Seymour	HCL453PTCCCV6
15	Pass & Seymour	LSLV603PWV

