

# RSL SERIES RESIDENTIAL LIGHTING



#### RSL6-MCT5-ORB

LED ULTRA SLIM RECESSED LIGHTS








LED DOWNLIGHTS (SMOOTH TRIM) - 6" ROUND Ideal for New As Well As Old Residential And Commercial Constructions.





6 6/7" x 6 2/3"

### **Features**

- 6" Smooth Recessed Trim
- Multi CCT (Selectable Switch On the Back Of The Driver)
- Isolated Driver For Improved Thermal Management
- 5-Year Warranty
- Spun Aluminum With White Powder Coat Finish

# **Technical Specifications**

#### **Electrical:**

Voltage: 120V ACOutput Voltage: 36VDCPower Factor: >0.90Wattage: 15W

Efficacy: 75 LPW

Total Harmonic Distortion: ≤15 %

#### Mechanical:

- 1/4"Thick
- Up to 9 AWG18 Wires
- Die-cast Aluminum With White Powder Coat Finish
- Pot Light Housing is Not Required Even for Insulated Ceiling
- Junction box 1" Thick Included With Fixture
- Type Crated: Approved For Direct Contact With Insulation
- Maximum Ambient Temperature: -4°F to 104°F
- Damp Location

### Lighting:

- Dimming: Dimmable Down to 10% Using a Standard TRIAC LED Dimmer
- Lens: 0.125" White Translucent Acrylic
- Can Rotate after Installation to Align
- LED: Seoul DOB (Driver On Board) Technology
- Optics: White Translucent Acrylic
- Total Lumens: 1125LM
- Color Temperatures: 2700K/ 3000K/ 3500K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on the Back of the driver )
- Color Rendering Index: CRI ≥ 80

Beam Angle: 100°-110°
Rated Life: 50,000 hrs

### **Applications:**

 LED recessed trims have been designed to be a flexible lighting solution for new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

#### Other Models:

• 15W | 1125LM | RDL6-MCT5













#### Photometrics: RSL6-MCT5-ORB



BUG Rating: B1-U2-G1

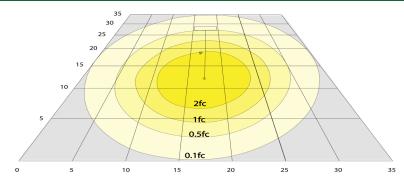


15W 5000K, Area 35'x 35' Mounting Height: 9'

#### **Other Views:**







Front View



Back View

#### Performance Table: RSL6-MCT5-ORB

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
RSL6-MCT5-ORB	15W	120V	1125LM	2700K	B1-U2-G1	75
				3000K		
				3500K		
				4000K		
				5000K		

Color Temp. Model Housing

RSL6

MCT5

ORB

#### **Accessories:**

Blank = No Option For Accessories

RSL-EXT-10FT-MCT = 10 FT. EXTENSION CABLE FOR USE WITH ALL SLIM LIGHT

RSL6-RI-13 = 6" ROUND ROUGH-IN PLATE, 13" LONG RSL6-RI = 6" ROUND ROUGH-IN PLATE, 26" LONG

RSL-346-RIBH = 3", 4", 6" (ADJUSTABLE)ROUND GALVANIZED PLATE WITH

**BAR HANGERS** 

RSL6-GR = GOOF RING FOR 6IN LIGHTS WITH BUTTERFLY WINGS

RSL6-TRM-BK = 6" Black Clip-on Trim

RSL6-TRM-ORB = 6" Oil-rubbed Bronze Clip-on Trim

RSL6-TRM-CU = 6" Copper Clip-on Trim

RSL6-TRM-BZ = 6" Bronze Clip-on Trim

RSL6TRM-BN = 6" Brushed Nickel Clip-on Trim

RSL6-TRM-CH = 6" Chrome Clip-on Trim

### Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-DL1EXT = EXTERNAL BATTERY BACKUP

#### **ACCESSORIES:**



RSL6-RI-13 6" Round Rough-in Plate, 13" Long



RSL-346-RIBH

3", 4", 6" (Adjustable) Round Galvanized plate with Bar Hangers



BK ORB CU BZ BN CH

#### **FACTORY-INSTALLED OPTION:**



**OPT-EM-DL1EXT** EXTERNAL BATTERY BACKUP



**RSL-EXT-10FT-MCT** 10 Ft. Extension Cable For use with all Slim Light



RSL6-RI 6" Round Rough-in Plate, 26" Long



RSL6-GR Goof Ring For 6in Lights With Butterfly Wings

### Example:

1. RSL6-MCT5-ORB 2. RSL6-MCT5-ORB

(FOR RSL6 15W MCT5 FIXTURE 120V)

(FOR RSL6 15W MCT5 FIXTURE 120V) (EXTERNAL BATTERY BACKUP)

2





## **Compatible Dimmer List:**

MODEL NO.	BRAND		
6631-1LT	LEVITON		
MACL-153MLH-AL	LUTRON		
TGCL-153PH-LA	LUTRON		
DVW-603PGH-WH	LUTRON		
CT-600PR-WH	LUTRON		
LGCL-153PHL-IV	LUTRON		
TGCL-153PH-LA	LUTRON		
LSLV603PWV	LUTRON		
6674-POW	LEVITON		
DVCL-153P	LUTRON		
MSCL-OP153P	LUTRON		
CTCL-153P	LUTRON		
MACL-153M	LUTRON		
HCL453PTCCCV6	PASS & SEYMOUR		
LSLV603PWV	PASS & SEYMOUR		



