# SCX4 SERIES Commercial Lighting

## SCX4-IP66-SUS-4FT-40-80W-MCTP

POWER & CCT- ADJUSTABLE LINEAR LIGHT, Suspended

Multi Color Temperature & Multi Power/Wattage (Selectable)



The SCX series offers the best and the most comprehensive selection for linear lighting. The unique and modern look providing a impressive illumination for the occupants. Ideal for, retail locations, offices, lobbies, conference rooms, reception areas, hallways, educational facilities, hotels, and restaurants. FEATURES: Superior Architectural Look Energy-efficient: Low Wattage Consumption& High Lumen Output Easier Wire Management, Multi Color Temperature (Selectable Switch on the Fixture)

# WESTGATE THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Na	ime:	
Project Name	e:	
Note:	Type:	
19	47 1/2"	
		1
<u></u>		 3 1/2'
<del>- # -</del>		
	4 1/5"	
	4"	
	4 1/5"(D) x 47 1/2"(W) x 3 1/2"(H)	
	( , = ()	

# **Features**

- LED Superior Architectural Lights
- Opal Polycarbonate Lens-Direct (DOWN) Lighting

Lens Type: Opal Polycarbonate Lens

# **Technical Specifications**

#### **Electrical:**

Voltage: 120-277VAC 50/60Hz
 Wattage: 40W/60W/80W
 Power Factor: >0.95

LPW: 105

Total Harmonic Distortion: ≤ 19 %

## Mechanical:

- Power Cord is Not Included. Select From The Following Range:
- SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft AC Pigtail With Female Wet Loc. Connector
- SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft AC Pigtail With Female Wet Loc. Connector
- SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector
- SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector
- Wall Mounting Kit Included
- Suspended With Optional Stainless Steel Down Rod Kits or Heavy-Duty Aircraft Cables
- Waterproof Male & Female Connectors Pre-Installed On The Top Near The Two Ends
- Low Profile Modern Design
- Aluminum Housing With Sandy White Finish
- Mounting Options: Suspended, Wall
- IP Rating: IP66 Wet Location Only
- Operating Temperature: -22°F to +104°F
- 5-Year Warranty

# Lighting:

- MCTP: Multi Color Temperature and Power (Selectable Switch Fixture)
- Dimmable: 0~10V Dimming
- Total Lumens: 8400LM Max.
- Color Temperatures: 3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 80
- 50,000 Hours Rated Life
- Beam Angle: 105°(H) x 103.7°(V)

# **Applications:**

 Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions














## Photometrics: SCX4-IP66-SUS-4FT-40-80W-MCTP





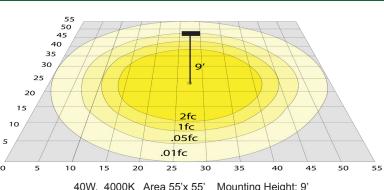

BUD Rating: B2-U3-G1

40W, 4000K Area 55'x 55' Mounting Height: 9'

## Other Views:

Suspended Mounted (Shown with Rod Kits)









**Coupling Connection** 

Wall Mounted







Front View

Back View

# Performance Table: SCX4-IP66-SUS-4FT-40-80W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SCX4-IP66-SUS-4FT-40-80W-MCTP	40W 60W 80W	120~277V	4200LM 6300LM 8400LM	3500K 4000K 5000K	B2-U3-G1	105





# Sample Ordering

Model IP Rating Type Size **Wattage Color Temp** 

SCX4 - IP66 - SUS - 4FT -40 **=** 80W **=** MCTP

#### **Accessories:**

SCL-GS210 = Heavy-Duty Adjustable 5/64" 10 Ft. Suspension Kit With Loop Gripper & Hook(1) SCL-GS220 = Heavy-Duty Adjustable 5/64" 20 Ft. Suspension Kit With Loop Gripper & Hook(1) SCL-6FT-SJTW18/5 = 6ft White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT = 100ft Roll of White Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/5-100FT-BK = 100ft Roll of Black Cord, SJTW 18 AWG 5-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming)

SCL-6FT-SJTW18/6-100FT = 100ft Roll of Black Cord, SJTW 18 AWG 6-Conductor (Black, White, Green + Purple & Gray for 0-10V Dimming + Red for Backup Invertor)

SCL-AH = Heavy-Duty Auxiliary Hook for Up To 1/16" Aircraft Cable

SCL-ASC-500FT = 1/16" 500 ft. Steel Aircraft Cable Suspension

SCX4-IP66-ACPT-6FT = SCX4-IP66 6Ft Ac Pigtail With Female Wet Loc. Connector

SCX4-IP66-ACPT-10FT = SCX4-IP66 10Ft Ac Pigtail With Female Wet Loc. Connector

SCX4-IP66-JUMP-6IN = SCX4-IP66 6In Ac Jump Cable With Male And Female Wet Loc. Connector SCX4-IP66-JUMP-12IN = SCX4-IP66 12In Ac Jump Cable With Male And Female Wet Loc. Connector

SCX4-IP66-CB = SCX4-IP66 Coupling Bracket

SCX4-IP66-RODKIT-18IN = SCX4-IP66 18In Suspension Rod Kit SCX4-IP66-RODKIT-24IN = SCX4-IP66 24In Suspension Rod Kit

SCX4-IP66-SCBK = Suspension Cable Bracket (required with suspension cables)

## SUSPENDED MOUNTING ACCESSORIES (NOT INCLUDED)



SCL-GS210 SCL-GS220







SCL-6FT-SJTW18/5-100FT SCL-6FT-SJTW18/6-100FT

SCL-6FT-SJTW18/5-100FT-BK

SCL-ASC-500FT









SCL-AH

SCL-ASC-500FT SCL-6FT-SJTW18/5

SCX4-IP66-ACPT-6FT SCX4-IP66-ACPT-10FT







SCX4-IP66-CB

SCX4-IP66-JUMP-6IN SCX4-IP66-JUMP-12IN

SCX4-IP66-RODKIT-18IN





SCX4-IP66-RODKIT-24IN

SCX4-IP66-SCBK

Other Model: SCX4-IP66-SUR-4FT-40-80W-MCTP







Side View

**Bottom View** 

Back View



