
SDTL SERIES Commercial Lighting

SDTL-8FT-40-60W-MCTP

POWER & CCT- ADJUSTABLE LINEAR TUBE DECORATIVE SUSP. LIGHT





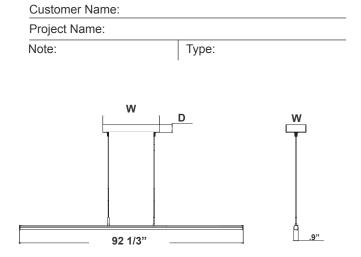

Canopy Dimension: 11 4/5"(W) x 1.6"(D) x 4 1/5"(W)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens Direct Down Light
- Aluminum Housing With Sandy Black Finish
- MCTP: Multi Color Temperature and Power (Selectable, the Switches Are Inside The Canopy)
- 5-Year Warranty

Technical Specifications

Electrical:

Voltage: 120-277V AC 50/60Hz
Wattage: 40W/50W/60W
Power Factor: >0.95
LPW: 105LM/W

Total Harmonic Distortion: ≤19 %

Mechanical:

- Aluminum Housing With Sandy Black Finish
- Two 10FT Adjustable Suspension Cables
- White Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Ename
- Opal Polycarbonate Tube Lens Direct Down Light
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Indoor Use Only
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 6300LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, hotels, corridors, saloons, libraries, meeting rooms, conference halls, and the best solution for modern lighting solutions
- It can be used in any indoor applications

Other Models:

60W | 6300LM | SDTL-8FT-40-60W-MCTP-BK











Photometrics: SDTL-8FT-40-60W-MCTP





100 95 85 80 75 70 65 65 55 50 45 40 35 30 25 20 15 10 0.5fc 35 40 45 O 30 50 55 60 65 60W 4000K, Area 100'x 80' Mounting Height: 9'

BUD Rating: B1-U2-G1

Other Views:







Side View

Front View

Bottom View

Performance Table: SDTL-8FT-40-60W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SDTL-8FT-40-60W-MCTP	40W	120~277V	4200	3000K 3500K 4000K	B1-U2-G1	105
	50W		5250			
	60W		6300			

Sample Ordering

Model		Size		Wattage		Wattage	Co	Color Temp.	
Ī	SDTL	8FT	_	40	_	60W	_	MCTP	

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:





OPT-EM-SL1INT

Example:

1.SDTL-8FT-40-60W-MCTP

(For SDTL 60W MCTP fixture 120-277V)

2.SDTL-8FT-40-60W-MCTP OPT-EM-SL1INT

(For SDTL 60W MCTP fixture 120-277V) (EMERGENCY BACKUP INTERNAL BATTERY)





