

SFX-G9-600W-30D-50K SFX-G9-1000W-30D-50K




1. Technical Parameters

Model number	Input Voltage	Power	Lumen	LED Type	Beam Angle
SFX-G9-600W-30D-50K	AC100-277V	600W	90000Lm	SMD 5050	30°
SFX-G9-1000W-30D-50K	AC100-277V	1000W	140000Lm	SMD 5050	30°


2. Application

Sports Lighting, Stadium lighting, Sports fields, Car parks, High mast installations Dock, railway and container yards, Ports and other large scale outdoor applications, Architectural lighting, Landscape lighting, Industrial and commercial exterior lighting Decorative lighting for holidays, tradeshow, exhibitions.


3. Dimension Diagram

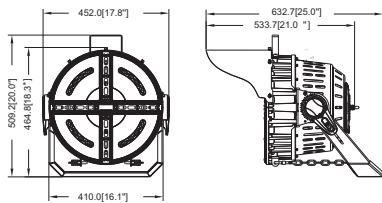


P1 SFX-G9-600W-30D-50K



P3 SFX-G9-600W-30D-50K

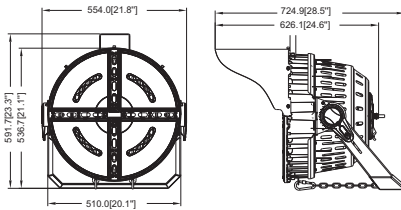

P1 SFX-G9-1000W-30D-50K



P3 SFX-G9-1000W-30D-50K

4. Installation instructions

P1 U-Shaped Bracket

01

M16

02

Wattage	D1	D2	D3
600W	220mm	25mm	50mm
1000W	290mm	40mm	60mm

03

04

180°

05

06


07

Brown/Black — L
Blue/White — N
G/Y — GND

08

09

P3 Slip Fitter

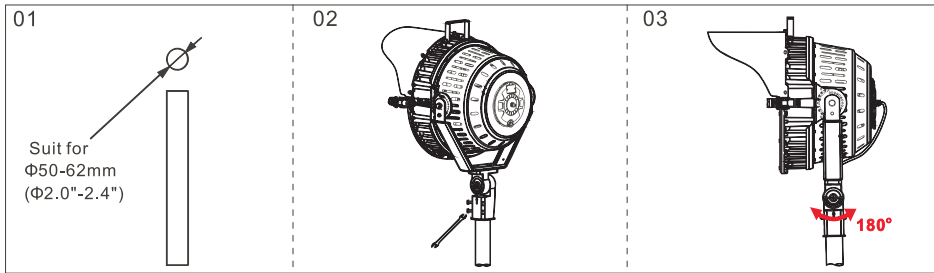

5. Attention

1. Install by qualified electricians only .
2. Make sure that the supply voltage is disconnected before installation.
3. Make sure the voltage is suitable with the lamps , and L/N/G connect properly.
4. All the lights during installation or using should not be led's cover vertical upside or Vertical down.
5. Don't open the lamps without Manufacturer's Authorized.