



WAREHOUSE-LIGHTING.COM



Wall Pack


LED-3110

APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges



Product Description:

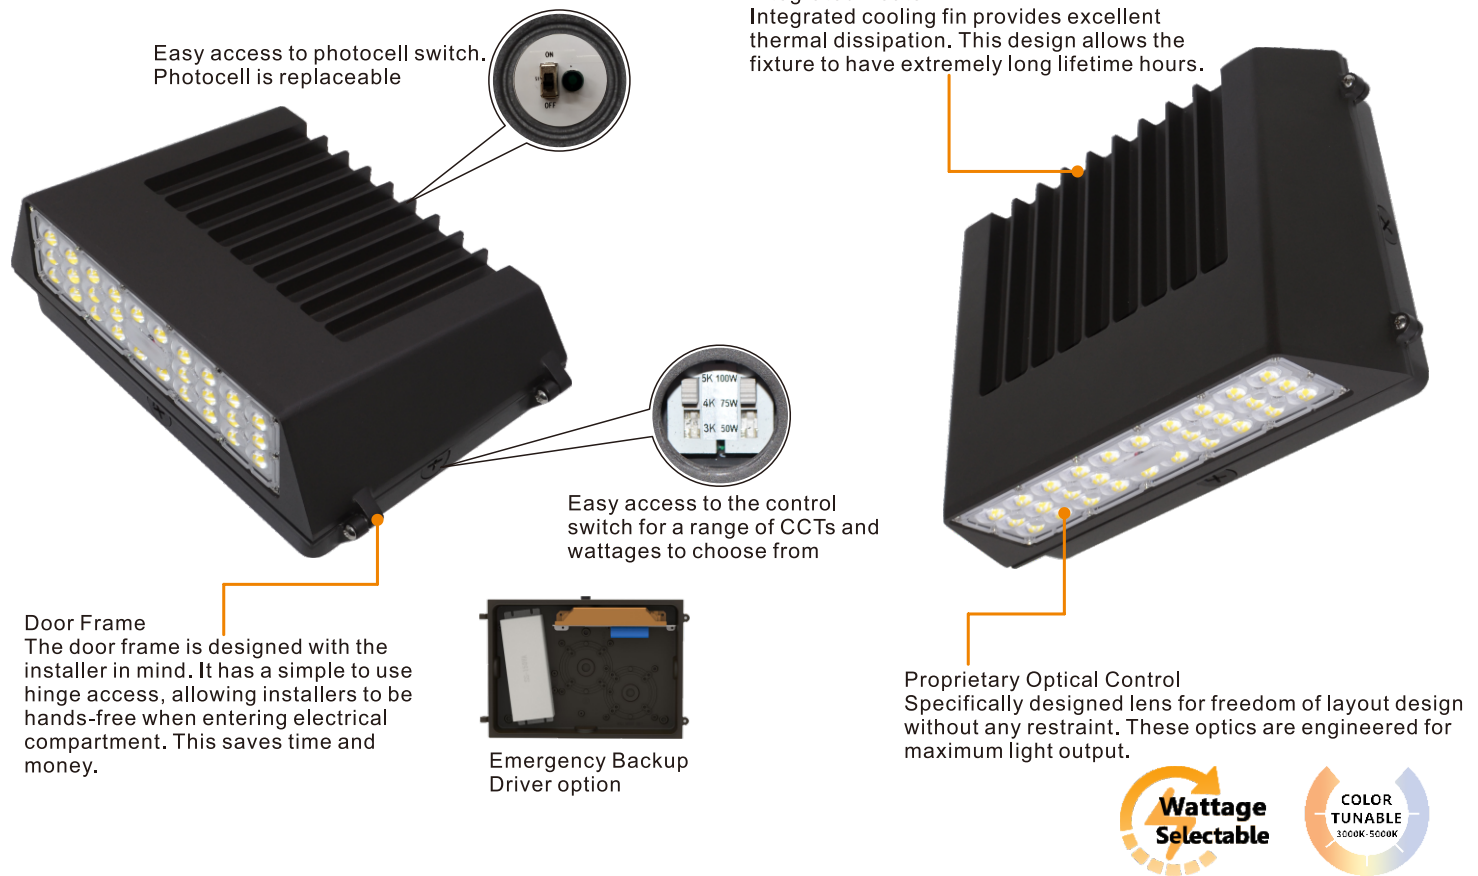

Product Description:

The LED-3110 is a powerful luminaire that has been designed to meet a wide variety of locations. With the various mounting options it can be used as a flood light or as an area light. With the LEDs mounted on the large heatsink, the fixture can maintain a high lumen output while keeping the LED modules at a cool temperature.

Optional Kelvin color* with adder.

Features:

- LISTING**
UL and CUL listed for wet locations
- HOUSING**
Heavy duty die-cast aluminum powder coating, corrosion resistant hardware
- FINISH**
UV stabilized powder coated finish
- LENS**
Heat and impact PC Lens
- OPTIONS**
Wide / narrow distribution available with adder
Finish - Bronze. Color option with adder

Performance Data

Model NO.	System Watts	Lumens	LPW
LED-3110	20/30/40W	5594 lm**	140 lm/w
LED-3110	25/45/55W	7237 lm**	132 lm/w

Lumen and Efficacy are based on the highest wattage at 5000K

Specification:

Example: LED-3110

Model No.	System Watts	Input Voltage	CRI	Color Temp	Distribution	Option	Finish	Starting Temp
						Accessories		
LED-3110	40=40W	UNV=120-277V	7=70+	40=4000 K	T3=Type III	PE=Photocontrol EM=Emergency Driver FAO=FAO Controller	BZ=Bronze	-40°C
LED-3110	55=55W			50=5000 K	T4=Type IV			

* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

