


# SPL SERIES Commercial Lighting

SPL-4FT-40W-MCT-D  
LED SUSPENDED UP/DOWN CLEAR PANEL LIGHT



Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ | Type: \_\_\_\_\_

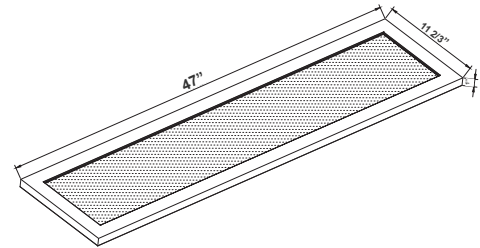

47"(L) x 11 2/3"(W) x 1"(H)

The unique design incorporates a clear transition zone between the frame and the light-emitting portion of the fixture, making the illusion of the light floating in mid-air. Ideal for Closets/ Storage rooms/Offices Conference rooms/Retail Reception areas/ Hallways Education facilities and Parking Garages

## Features

- White, Die-cast Aluminum
- High quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- 50,000 Hours Rated Life
- 5-Year Warranty
- Lens: Clear Patterned Light Guide Panel Lens

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W
- Power Factor: >0.95
- Efficacy: 105 LPW

### Mechanical:

- White, Die-cast Aluminum
- Diffuser is Secured Continuously Along Luminaire Sides
- High quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- Suspension Cables & Cord Not Included
- IP Rating: IP54
- Operating temperature: -13°F ~ 104°F

### Lighting:



- Lens: Clear Patterned Light Guide Panel Lens
- Dimmable: 0-10V
- Total Lumens (Up/Down): 2100/2100 LM
- Color Temperatures: 3500K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 104.8°(H) x 100.5°(V)

### Applications:


- Closets/Storage rooms/Offices
- Conference rooms/Retail
- Reception areas/Hallways
- Education facilities
- Parking Garages



## Photometrics: SPL-4FT-40W-MCT-D



BUD Rating: B1-U5-G1

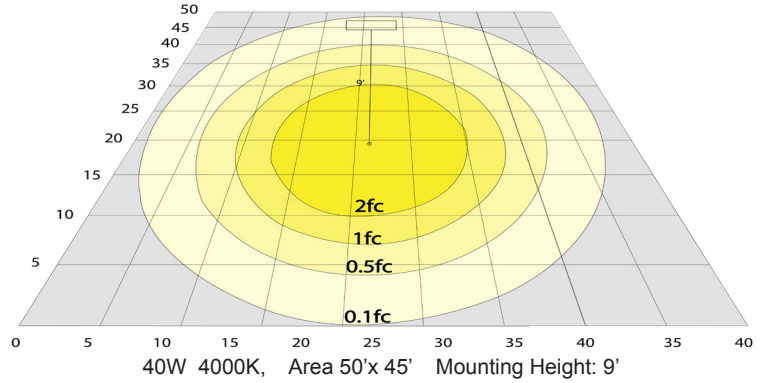

## Other Views:

Suspension Cables & Cord Not Included



Side View



Top View



Bottom View

## Performance Table: SPL-4FT-40W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SPL-4FT-40W-MCT-D	40W	120~277V	2100LM/2100LM	3500K 4000K 5000K	B1-U5-G1	105

## Sample Ordering

Model Size Wattage Color Temp. Dimming

SPL - 4FT - 40W - MCT - D

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-AC2EXT = External emergency backup battery

SCL-CSY1-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH Y DOUBLE KEYHOLE END CONNECTORS, NON-POWER SIDE

SCL-CSY1P-6FT = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH Y DOUBLE KEYHOLE END CONNECTORS, POWER SIDE WITH SJTW18/5 WHITE CORD

SCL-CSY1P-6FT-NC = ADJ. 6FT 1/16in SINGLE SUSPENSION CANOPY SET WITH Y DOUBLE KEYHOLE END CONNECTORS

## FACTORY-INSTALLED OPTIONS:



OPT-EM-AC2EXT



SCL-CSY1-6FT



SCL-CSY1P-6FT



SCL-CSY1P-6FT-NC

## Example:

- SPL-4FT-40W-MCT-D (For SPL 40W 4000K fixture 120-277V)
- SPL-4FT-40W-MCT-D OPT-EM-AC2EX (For SPL 40W 4000K fixture 120-277V) (External emergency backup battery)

