

## PWY PATHWAY

PROJECT: \_\_\_\_\_

SCHEDULE: \_\_\_\_\_ DATE: \_\_\_\_\_

PREPARE BY: \_\_\_\_\_

NOTES: \_\_\_\_\_

### DESCRIPTION


naturaLED® PWY bright pathway lighting is important for the safety of pedestrian foot traffic. Ensuring that sidewalks and pavement are well lit reduces the risk of people tripping and falling. The superior quality of our DLC pathway light fixture provides selectable wattage and selectable color temperature with glare-free lighting that produces up to 2160 lumens.

### APPLICATIONS

Pathway, Architectural, Perimeter, Commercial

### FEATURES

- DLC Premium
- IP65 Rated
- ETL/cETL Listed
- Excellent thermal design
- Easy installation
- Selectable Wattage (10W/15W/18W)
- Color Temperature: 3CCT (3000/4000/5000K)
- Input line voltage: 120-347V
- CRI: >80
- Voltage Frequency (Hz): 50/60
- Powerfactor >0.9
- Beam Angle: Type V Medium
- Surge Protection: 10KV
- Operating temperature: - 40°F - 122°F
- 5 Year Warranty

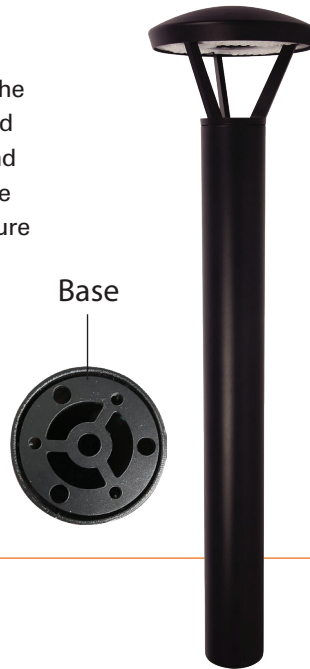

**Rated Life 50,000 Hours**  
**Warranty 5 Years**

### ACCESSORIES

- 4W Emergency Battery+Plate
- IR Motion Sensor
- Bluetooth Control

**SAMPLE NUMBER** FX10PWY18SW/42/8CCT3/BK/T5/347

FAMILY	DIAMETER	SERIES	WATTAGE	HEIGHT	CRI/COLOR TEMP	LENS	VOLTAGE
FX Fixture	10 10-inch	PWY Pathway	18SW 18 Watt Selectable Wattage	42 42-inch Height	8CCT3 CRI 80 CCT3 - Selectable (3000/4000/5000K)	T5 Type 5	347 120-347V



ORDERING

\*P= Premium DLC / \*S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Diameter	IP65 Rated	DLC (P/S)
10	9642	FX10PWY18SW/42/8CCT3/BK/T5/347	3CCT	1,200	50-150W	10"	•	•
15			(3/4/5K)	1,800				
18				2,160				

ACCESSORIES (Ordered Separately)

Emergency Driver



K7336412 FXVTL30-BAEM-MTG1  
(Kit for 4W Emergency Driver and Plate )

Bluetooth Control



P10489 CTL-MW-PSC-ZKV-R01T  
(Z10 Receptable Tyco 2343403-1)



P10488 CTL-MW-PSC-ZKV-WCM-100-BLE-SR  
(Bluetooth Outdoor Controller, 0-10V, 12-24Vdc, Z10 Brown)


Motion Sensor



P10371 SEN-BRI619  
(Remote Programmable PIR Motion/Photocell 0-10V  
Bi Level Internal 12V-24V Low Voltage)



DIMENSIONS

10/15/18W (10-inch)  
10.65-lbs

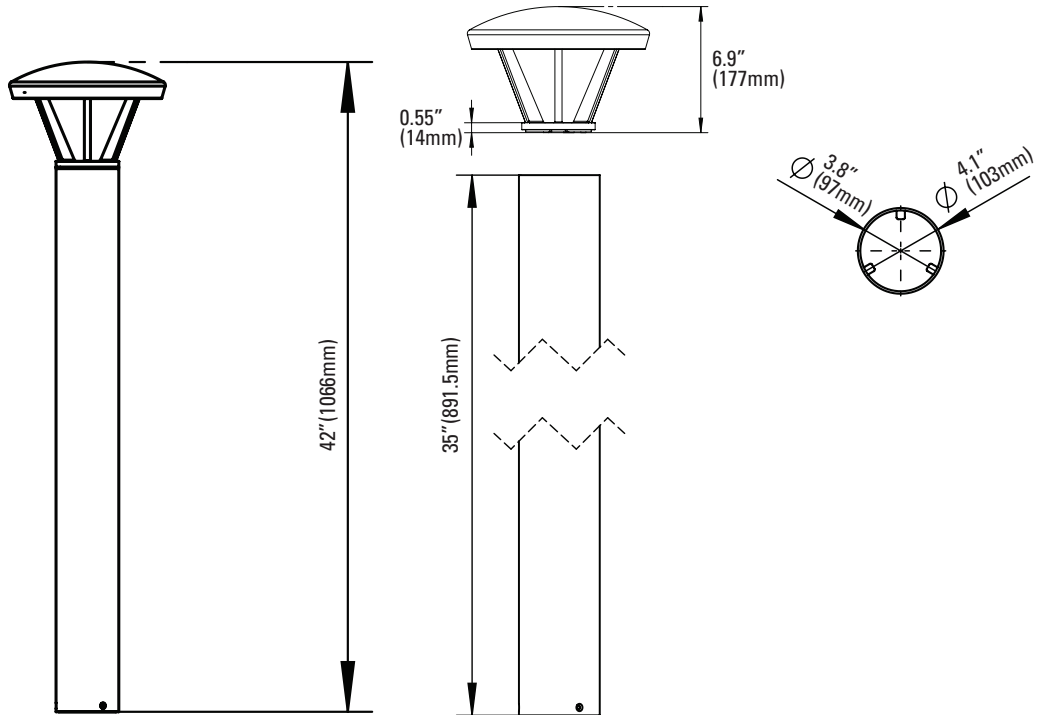

PHOTOMETRICS CHART

10/15/18W (10-inch)  
DLC Premium

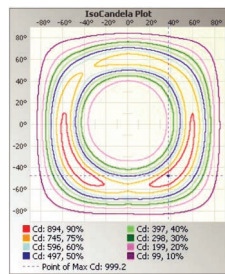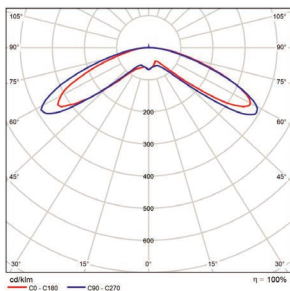

Center Beam fc	Beam Width	
0.58R	477 fc	0.36 ft 0.64 ft
1.17R	117 fc	0.73 ft 1.30 ft
1.75R	52.4 fc	1.09 ft 1.94 ft
2.33R	29.6 fc	1.45 ft 2.58 ft
2.92R	18.8 fc	1.81 ft 3.23 ft
3.50R	13.1 fc	2.17 ft 3.87 ft

Vert. Spread: 34.5°  
Horiz. Spread: 57.9°

PACKAGE

Case Qty  
1 pc

