

Tunable LED Vapor Tight

3-Wattages + 3-CCT (35/40/50K), Wet Rated, 135 lm/W, Dimmable + Smart AUX Input

FEATURES

Lumen Output	5400 to 12150 lumens
Efficacy	135 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
Size	4-FT, 8-FT
CCT	Select (3500K, 4000K, 5000K)
Rating	Wet Location
Warranty	7 Years

APPLICATIONS

Premium indoor luminaire for hanging or surface mounting in ceiling spaces less than 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, work-stations, and covered decks.

CONSTRUCTION

Manufactured for durability with injection molded polycarbonate to resist corrosion, discoloration, and scratching. Stainless steel clips lock the lens cover to resist dust, moisture and vapors. Wet Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -4°F to 104°F (-20°C to 40°C).

MOUNTING

Aluminum Surface Mount Clips standard.

OPTICS

Anti-UV Frosted Polycarbonate Lens standard.

CONTROLS

Installed fixture mounted Microwave Sensor, PIR Sensor or Bluetooth with Daylight Priority available. Remote Control available.

EMERGENCY

Installed 90 Minute Emergency Backup Battery LED Driver available.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

7 year exclusive limited warranty.

Project:
Date:
Catalog No:
Prepared By:

4-FT and 8-FT Models



Surface Mount Clips included



PIR Sensor or Bluetooth



Microwave Sensor



Remote Control



LCD Remote Control




Emergency Driver



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3500K 4000K 5000K

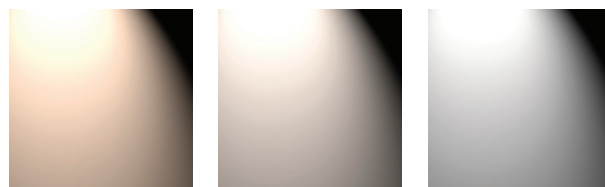

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 3-Wattages (60W Max, 90W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <10%
Operating Temperature: -4°F to 104°F (-20°C to 40°C)

LIGHTING DATA

Lumens: 5400 to 12150
Lumens Per Watt: 135 lm/W
Correlated Color Temperature (CCT): 3-CCT (35K, 40K, 50K)
Dimmable: 0-10V
Color Rendering Index (CRI): >80
L70: 75000 hours

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
ETH-TT2VT4-40/50/60W-3CCT	4-FT	(40W	120-277V	0.37A@120V, 0.16A@277V	5400	135 lm/W	(3500K,	0-10V	Gray	47.20"L x 3.50"W x 3.10"H
		50W		0.46A@120V, 0.20A@277V	6750		4000K,			
		60W)		0.55A@120V, 0.24A@277V	8100		5000K)			
ETH-TT2VT8-60/75/90W-3CCT	8-FT	(60W	120-277V	0.55A@120V, 0.24A@277V	8100	135 lm/W	(3500K,	0-10V	Gray	94.50"L x 3.50"W x 3.10"H
		75W		0.69A@120V, 0.30A@277V	10125		4000K,			
		90W)		0.83A@120V, 0.36A@277V	12150		5000K)			

Control

Emergency

US008-016VCR	[[INSTALLED] Microwave Sensor with Daylight Priority and Daylight Harvesting, DC12V	EM6	INSTALLED - Emergency LED Driver, 6W, 90-Minute Battery
HD08VR-1	[[INSTALLED] PIR Sensor with Daylight Priority and Daylight Harvesting, AUX Input		
HD08VR-MB-1	[[INSTALLED] PIR Sensor with Daylight Priority and Daylight Harvesting, AUX Input, Bluetooth		
HD03R	Remote Control for Sensor Settings		
HD05R	Remote Control for Sensor Settings w/ LCD		

PHYSICAL DIMENSIONS

4-FT Models

47.20"L x 3.50"W x 3.10"H



8-FT Models

94.50"L x 3.50"W x 3.10"H

