

WHL-6CMCT22LR05

6" Architectural Downlight - LKFS



STANDARD



FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 149,000 hours of operation.**
- Color rendering index (R_a) > 90.
- Field selectable lumen output – 1,000, 1,500, or 2,000 nominal lumens.
- Uses 10, 15, or 20 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- 0-10VDC dimming is standard.
- Aluminum housing with white stepped baffle.
- Easy installation in new construction or retrofit applications.
- Compatible with 6.30" ceiling cut-outs and 6" mounting frames.
- Type IC. Access above ceiling required. Covered ceiling mount only.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.



WARRANTY & LISTINGS

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1kV).
- 5-year warranty of all electronics and housing.

DIMENSIONS

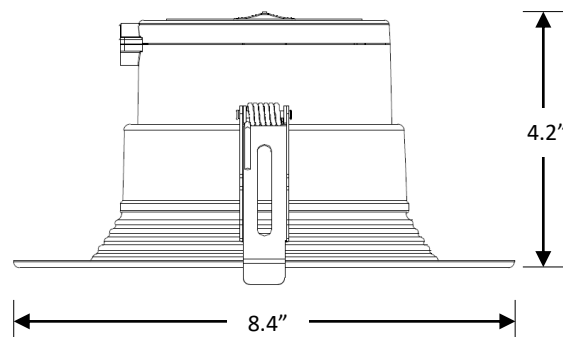

Weight: 1.4 lbs.

ORDERING INFORMATION

Example: WHL-6CMCT22LR05

Series	Lumen Output/ Color Temperature	
	Selectable Lumens	Selectable CCT
WHL-6CMCT22LR05	1,000 lm	2700k
	1,500 lm	3000k
	2,000 lm	3500k
		4000k
		5000k



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
requests@warehouse-lighting.com