

# WHL-CDR6-2L-LKFS-WHT 6" Architectural Downlight - LKFS



WAREHOUSE-LIGHTING.COM

## STANDARD



## FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 149,000 hours of operation.\*\*
- Color rendering index ( $R_a$ ) > 90.
- Field selectable lumen output:  
CDR6-2L-LKFS-WHT = 2,000, 1,500, or 1,000 nominal lumens.  
CDR6-2L-LKFS-SW = 1,600, 1,200, or 900 nominal lumens.
- Uses 20, 15, or 10 nominal watts.
- Universal 120-277 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- 0-10VDC dimming is standard.
- Aluminum housing.
- Easy installation in new construction or retrofit applications.
- Compatible with 6.30" ceiling cut-outs and 6" mounting frames.
- Type IC. Access above ceiling required. Covered ceiling mount only.

\* Contact factory for other color temperatures and lumen packages.


\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## WARRANTY & LISTINGS

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (1kV).
- 5-year warranty of all electronics and housing.

## DIMENSIONS

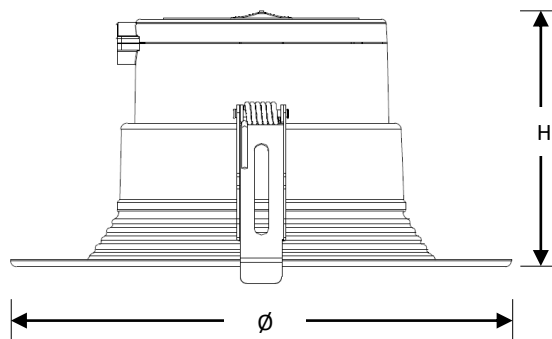

Series	Ø	H	Weight
WHL-CDR6-2L-LKFS-WHT	8.4"	4.2"	1.4 lbs
WHL-CDR6-2L-LKFS-SW	8.3"	4.4"	1 lbs

## ORDERING INFORMATION

Example: WHL-CDR6-2L-LKFS-WHT

Series	Nominal Lumen Output (Selectable)		CCT (Selectable)	Baffle Type	
	CDR6	2L	2,000/1,500/1,000	LKFS	WHT
	2L	1,600/1,200/900	LKFS	SW	Specular White



Warehouse-Lighting.com  
2750 South 163<sup>rd</sup> St  
New Berlin, WI 53151

[Warehouse-Lighting.com](http://Warehouse-Lighting.com)  
Phone: 888-454-4480  
[requests@warehouse-lighting.com](mailto:requests@warehouse-lighting.com)