


WHL-KOK-4EJCT09SR05 4" FLAT PANEL - KFS



STANDARD

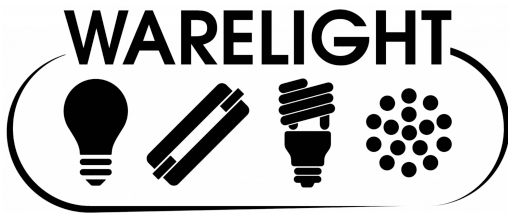

FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 181,000 hours of operation.**
- Color rendering index (R_a) > 90.
- 600 nominal lumens.
- 7 nominal watts.
- 120 AC voltage (60Hz) is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Triac dimming.
- Aluminum housing.
- Easy installation in new construction or retrofit applications.
- Compatible with 4.30" ceiling cut-outs.
- Type IC. Access above ceiling required. Covered ceiling mount only.

* Contact factory for other color temperatures and lumen packages.


** L_{70} hours are IES TM-21-11 calculated hours.



WARRANTY & LISTINGS

- cETLus listed for wet locations not exceeding 45°C (113°F).
- Energy Star certified.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with EN61000-4-5 surge protection (0.5kV).
- 5-year warranty of all electronics and housing.

DIMENSIONS

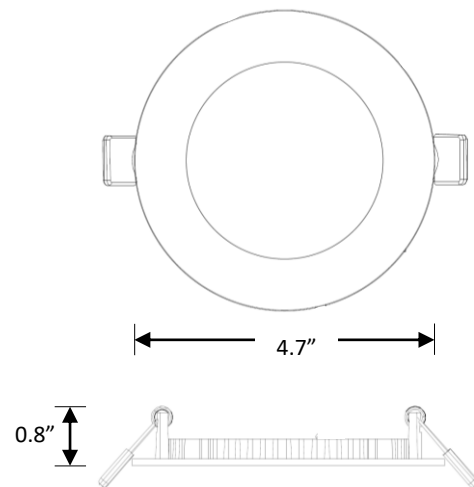

Weight: 0.25 lbs.

ORDERING INFORMATION

Example: WHL-KOK-4EJCT09SR05

Series	Color Temperature
WHL-KOK-4EJCT09SR05	Selectable CCT
	2700k
	3000k
	3500k
	4000k
5000k	



WAREHOUSE-LIGHTING.COM

Warehouse-Lighting.com
2750 South 163rd St
New Berlin, WI 53151

Warehouse-Lighting.com
Phone: 888-454-4480
requests@warehouse-lighting.com