

T5 INSTANT FIT T5 TUBES

PROJECT:	
SCHEDULE:	DATE:
PREPARE BY:	
NOTES:	

DESCRIPTION

naturaLED® Instant-Fit T5 easiest way to upgrade your fluorescent fixture to an LED lighting system. Our Instant-Fit T5 fits into an existing fluorescent lighting system. Utilizes the existing electrical T5 fluorescent ballast without re-wiring.

APPLICATIONS

Retails, restaurants, hospitalities, offices, schools

FEATURES

- DLC Standard
- UL Damp Location
- Instant On
- Compatible with electronic fluorescent ballast*
- Instant Fit/ Plug and Play (UL Type A)
- Base: Mini Bi-Pin G5
- Power Factor: >0.9
- Non-dimmable
- Beam Angle: 325°
- Length: 4-ft
- Operating temperature: - 4°F - 113°F
- 50,000 hrs rated average life



Rated Life 50,000 Hours
Warranty 5 Years

*check compatibility list

SAMPLE NUMBER		LED28T5/FR35/840/IF			
SERIES	WATTAGE	FAMILY	WATTAGE	CRI/COLOR TEMP	TYPE
LED	28	T5	FR35	840	IF
LED Lighting	28 Watt	T5 Tubes	Frosted 3,500 lumens	CRI 80 4000K	Instant Fit



INSTANT FIT T5 TUBES

TUBE LUMINAIRES


ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equivalent Wattage	Length	Base	UL Damp	DLC (S/P)
28	5992	LED28T5/FR35/840/IF	4000K	3,500	54W	4-ft	Bi-Pin G5	•	S
28	5993	LED28T5/FR35/850/IF	5000K	3,500	54W	4-ft	Bi-Pin G5	•	S
28	5902	LED28T5/FR32/840/IF	4000K	3,200	54W	4-ft	Bi-Pin G5	•	-


DIMENSIONS

T5 (4-ft)
0.24-lbs

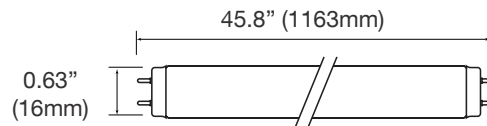

PHOTOMETRICS CHART

28 Watt (4-ft)
DLC Standard

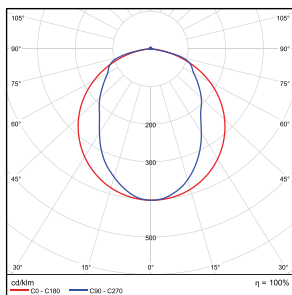

Center Beam fc	Beam Width
2.5 ft: 760 fc	8.0 ft x 4.4 ft
5.0 ft: 190 fc	15.9 ft x 8.8 ft
7.5 ft: 84.5 fc	23.9 ft x 13.2 ft
10.0 ft: 47.5 fc	31.9 ft x 17.6 ft
12.5 ft: 30.4 fc	39.8 ft x 22.0 ft
15.0 ft: 21.1 fc	47.8 ft x 26.4 ft

■ Vert. Spread: 115.8°
■ Horiz. Spread: 82.8°

PACKAGE

Case Qty 25 pcs

