


# TC SERIES OUTDOOR LIGHTING

TC-WW-72W-RGBW-BT-BK  
BLUETOOTH WG APP COMPATIBLE RGBW WALL WASH LIGHT


Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ | Type: \_\_\_\_\_

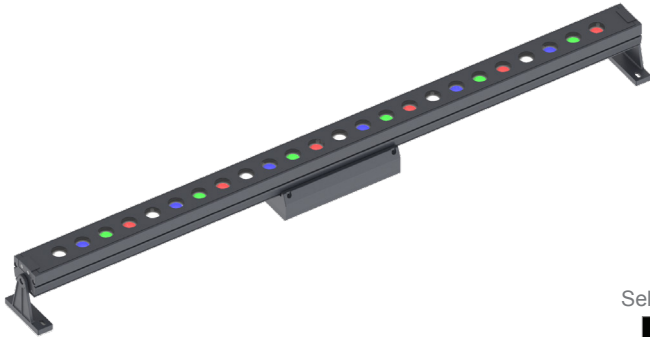

Selection:



3 3/4"(H) x 40"(W) x 3 1/2"(D)

The fixture has classic traditional appearance, professional light distribution design, 60-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

## Features

- Die-cast Aluminum Housing with Powder Coat Finish
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

## Technical Specifications

### Electrical:

- Voltage: 120-277V
- Power Factor: >0.9
- Wattage: 72W
- Efficacy: 34 LPW
- Operating Voltage: Max 900 mA, Max 36VDC
- Bluetooth Connection Range: Approximately 30 feet (10 meters). Maximum Communication Range Will Vary Depending On Obstacles (Person, Metal, Wall, etc.) Or Electromagnetic Environment.

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors
- 90° Adjustable Surface Mount Bracket
- High Conductive Aluminum LED Board
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65, Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- Dimming: Dimmable Through Phone App
- Total Lumens: 1900LM (Single White) 2500LM (Maximum Power)
- Color Temperatures: RGBW Selectable Through Phone App
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 60°

### Applications:



- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

### Other Models:


- 36W | 1300LM | TC-WW-36W-RGBW-BT-BK



**Photometrics:** TC-WW-72W-RGBW-BT-BK

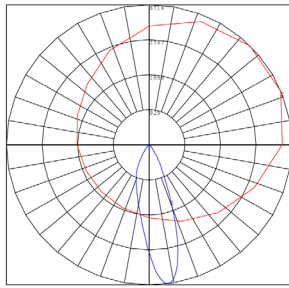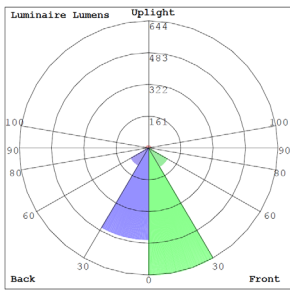

BUG Rating: B1-U2-G0

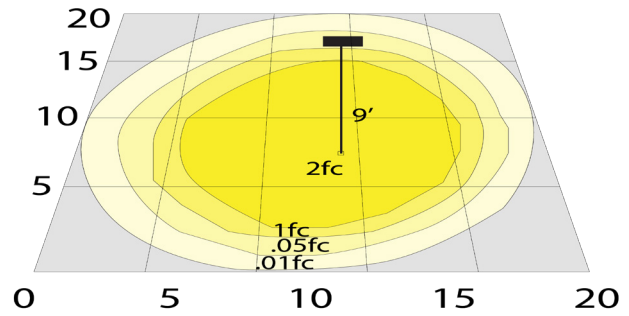

72W White, Area 20'x 20' Mounting Height: 9'


**Other Views:**



Side View



Front View

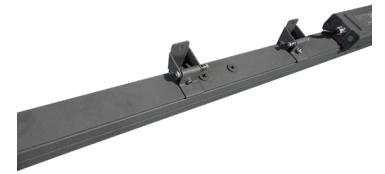

Back View

**Performance Table:** TC-WW-72W-RGBW-BT-BK

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
TC-WW-72W-RGBW-BT-BK	72W	120-277V	1900LM (Single White) 2500LM (Maximum Power)	RGBW	B1-U2-G0	34

**Sample Ordering**

-  -  -  -  -

**Accessories:**

Blank = No Option For Accessories  
 DMX-WW-SH2 = HALF GLARE SHIELD FOR TC-WW-36W/72W & DMX-WW-36W

**ACCESSORIES:**



**DMX-WW-SH2**  
 Half Glare Shield for  
 TC-WW-36W/72W &  
 DMX-WW-36W

**Example:**

1. TC-WW-72W-RGBW-BT-BK (FOR TC 72W RGBW FIXTURE 120-277V)
2. TC-WW-72W-RGBW-BT-BK DMX-WW-SH2 (FOR TC 72W RGBW FIXTURE 120-277V)  
 (HALF GLARE SHIELD FOR TC-WW-36W/72W & DMX-WW-36W)

