



PROJECT NAME: \_\_\_\_\_ CATALOG NUMBER: \_\_\_\_\_  
 NOTES: \_\_\_\_\_ FIXTURE SCHEDULE: \_\_\_\_\_



**PRODUCT DISCRIPTION**

Concord center basket troffers deliver unmatched performance and energy savings with superb flowing design. Featuring selectable wattage and CCT, these fixtures adopt the latest in optical and LED technologies to provide a single pleasant volumetric soft light that fills any interior space. The center basket design gives a larger, brighter, and more productive ambiance.

**PERFORMANCE**

- CCT Selectable: 3500K / 4000K / 5000K
- CRI: >80
- Hours: 50,000+
- Dimming: 0-10v down to 10%
- Suitable for Damp Location, TYPE IC
- Ambient Operating Range: (-20°C to 50°C) (-4°F to 122°F)
- Seoul LED chips
- Simon Driver

**WARRANTY**

- 5 Years

**APPLICATION**

- Office
- Hallway
- Multipurpose Rooms
- Conference Rooms

**ADDITIONAL OPTIONAL ACCESSORIES**

- Emergency Battery Back-up
- Sensor

**FEATURES**

- Visually pleasing, architectural design
- Continuous dimming for further demand reduction
- Mounting: recessed grid mount/T-Bar ceiling
- Listings: UL, DLC

Dimensions	Length	Width	Height
TRCBLED1x4/35/3500K-G2 TRCBLED1x4/35/4000K-G2	47.8"	11.8"	2.8"
TRCBLED2X2-CHWT-MV-DM010-G3	23.8"	23.8"	2.8"
TRCBLED2X4-CHWT-MV-DM010-G3	47.8"	23.8"	2.8"

SKU	Wattage
TRCBLED1x4/35/3500K-G2 TRCBLED1x4/35/4000K-G2	35W
TRCBLED2X2-CHWT-MV-DM010-G3	30W / 35W / 40W
TRCBLED2X4-CHWT-MV-DM010-G3	34W / 38W / 45W



Warehouse-Lighting.com  
 2750 South 163<sup>rd</sup> St  
 New Berlin, WI 53151


[Warehouse-Lighting.com](http://Warehouse-Lighting.com)  
 Phone: 888-454-4480  
[info@warehouse-lighting.com](mailto:info@warehouse-lighting.com)




Concord Troffer Lights					
Model #	Dimensions	Wattage	Kelvin	Lumens	Accessories
TRCBLED1x4/35/3500K-G2	1x4	35W	3500K	4248	EM-Emergency Backup
TRCBLED1x4/35/4000K-G2			4000K	4410	
TRCBLED2X2-CHWT-MV-DM010-G3	2x2	30W	3500K	3750	
		30W	4000K	3780	
		30W	5000K	3810	
		35W	3500K	4375	
		35W	4000K	4410	
		35W	5000K	4445	
		40W	3500K	5000	
		40W	5000K	5080	
TRCBLED2X4-CHWT-MV-DM010-G3	2x4	34W	3500K	4250	
		34W	4000K	4284	
		34W	5000K	4318	
		38W	3500K	4750	
		38W	4000K	4788	
		38W	5000K	4826	
		45W	3500K	5625	
		45W	4000K	5670	
		45W	5000K	5715	



## 2x2

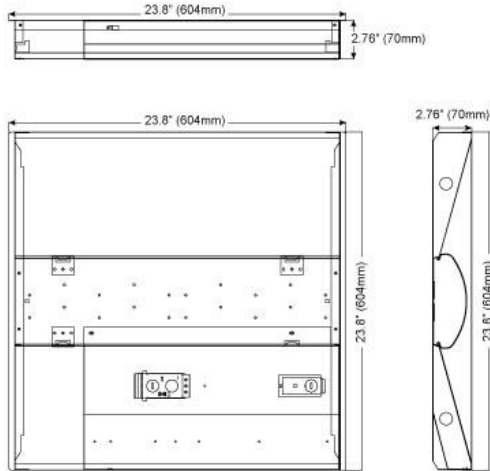

## 2x4

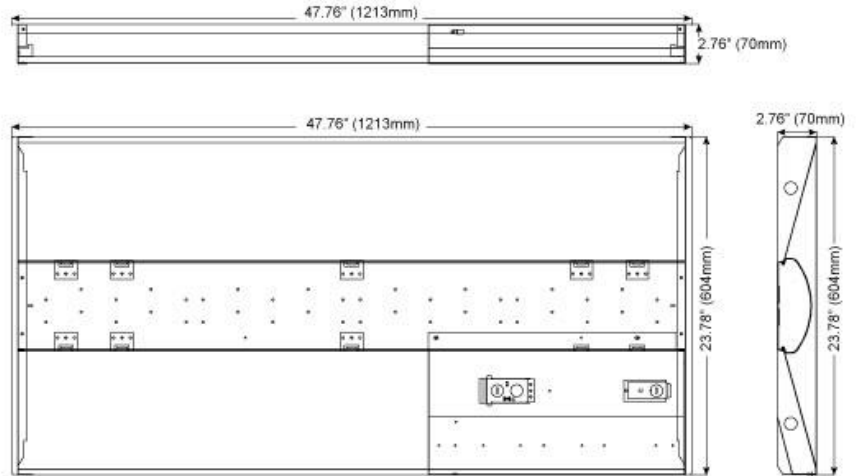

### Wiring Diagram

