

PROJECT: _____

SCHEDULE: _____ **DATE:** _____

PREPARE BY: _____

NOTES: _____

DESCRIPTION

naturaLED® Under Cabinet (UC) Lights are perfect for kitchen utility cabinets, shop cabinets and display lighting. Under cabinet lighting adds a layer of depth to your kitchen, highlights decorative surfaces and assist in tasks such as cooking and cleaning. The design features low-profile body with a white acrylic diffuser, an integrated on-off switch for each unit and connector cable (if desired) for easy installation. Our fixtures are wide-beam spreads and available in 9-inch or 18-inch.



APPLICATIONS

Under Cabinet, Kitchen, Office, Utility and Display Lighting






Rated Life 50,000 Hours
Warranty 5 Years

FEATURES

- Damp Location
- UL Rated
- JA8-2016/ CEC
- ColorTemp: 3000K, 4000K
- Voltage: 120V
- Powerfactor >0.9
- Dimmable with wall switch
- CRI: 90
- Operating temperature: - 4°F - 122°F
- Uniform light distribution and consistent color
- Excellent thermal design
- UV coated acrylic
- Integral ON/OFF switch
- Link any combination of fixtures up to 150W
- Available in 9" and 18" in length
- 5 Year Warranty
- Optional for Purchase: Quick Connector, Power Cable

ACCESSORIES

	10" Quick Connector
	Power Cable
	Quick Connector

SAMPLE NUMBER LED-FXUC4/9FR/930

STYLE	FAMILY	SERIES	WATTAGE	LENGTH/ LENS	CRI/COLOR TEMP
LED LED Lighting	FX Fixture	UC Under Cabinet	4 4 Watt	9FR 9" Frosted	930 CRI 90 3000K



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Damp Location
4	7591	LED-FXUC4/9FR/930	3000K	260	13	9"	•
4	7592	LED-FXUC4/9FR/940	4000K	260	13	9"	•
7	7600	LED-FXUC7/18FR/930	3000K	420	18	18"	•

ACCESSORIES (Ordered Separately)



10" Quick Connector
P10151 QC-FXUC-10IN
(10" Extended Quick Connector)




3' Power Cable
P10152 PWC-FXUC-3FT
(3' Power Cable)




Quick Connector
P10180 QC-FXUC-SRT
(Quick connection)

DIMENSIONS

4W (9-inch)
0.42-lbs

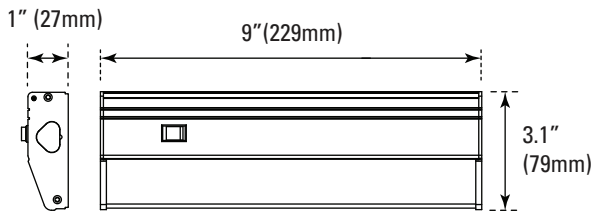


7W (18-inch)
0.84-lbs

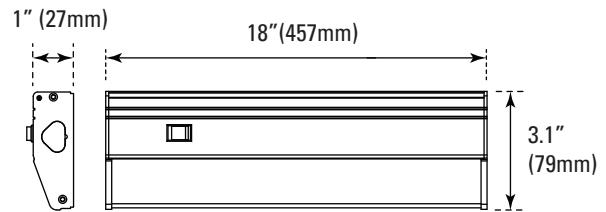

PHOTOMETRICS CHART


4W (9-inch)

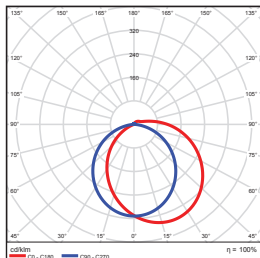

Center Beam (ft)	Beam Width (ft)
1.7ft	29.9 ft 4.9 ft 4.5 ft
3.3ft	7.94 ft 9.4 ft 9.0 ft
5.0ft	3.46 ft 14.3 ft 13.6 ft
6.7ft	1.93 ft 19.1 ft 18.2 ft
8.3ft	1.25 ft 23.7 ft 22.6 ft
10.0ft	0.86 ft 28.5 ft 27.2 ft

Vert. Spread: 109.9°
Horiz. Spread: 107.3°

7W (18-inch)

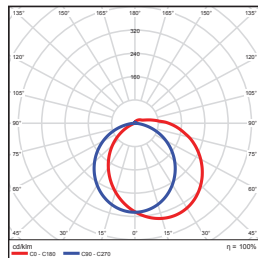

Center Beam (ft)	Beam Width (ft)
1.7ft	44.0 ft 5.0 ft 4.7 ft
3.3ft	11.7 ft 9.5 ft 9.1 ft
5.0ft	5.09 ft 14.6 ft 13.8 ft
6.7ft	2.83 ft 19.5 ft 18.5 ft
8.3ft	1.85 ft 24.2 ft 22.9 ft
10.0ft	1.27 ft 29.1 ft 27.6 ft

Vert. Spread: 111.1°
Horiz. Spread: 108.1°

PACKAGE

Case Qty
10 pcs

